Back

SAUER DANFOSS

HYNESUR
SUMINISTROS DE HIDRÁULICA Y NEUMÁTICA DEL SUR, S.L.

Series 45
Axial Piston Open Circuit Pumps

Technical Information

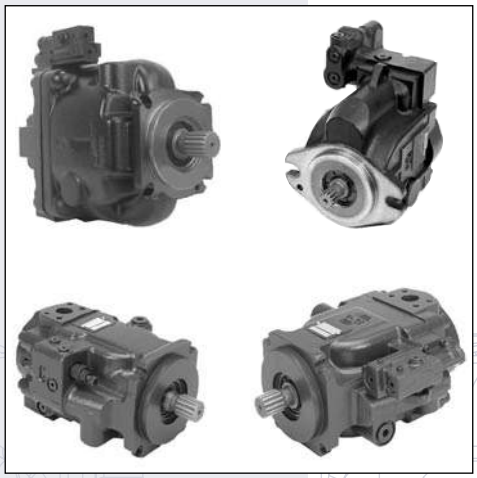

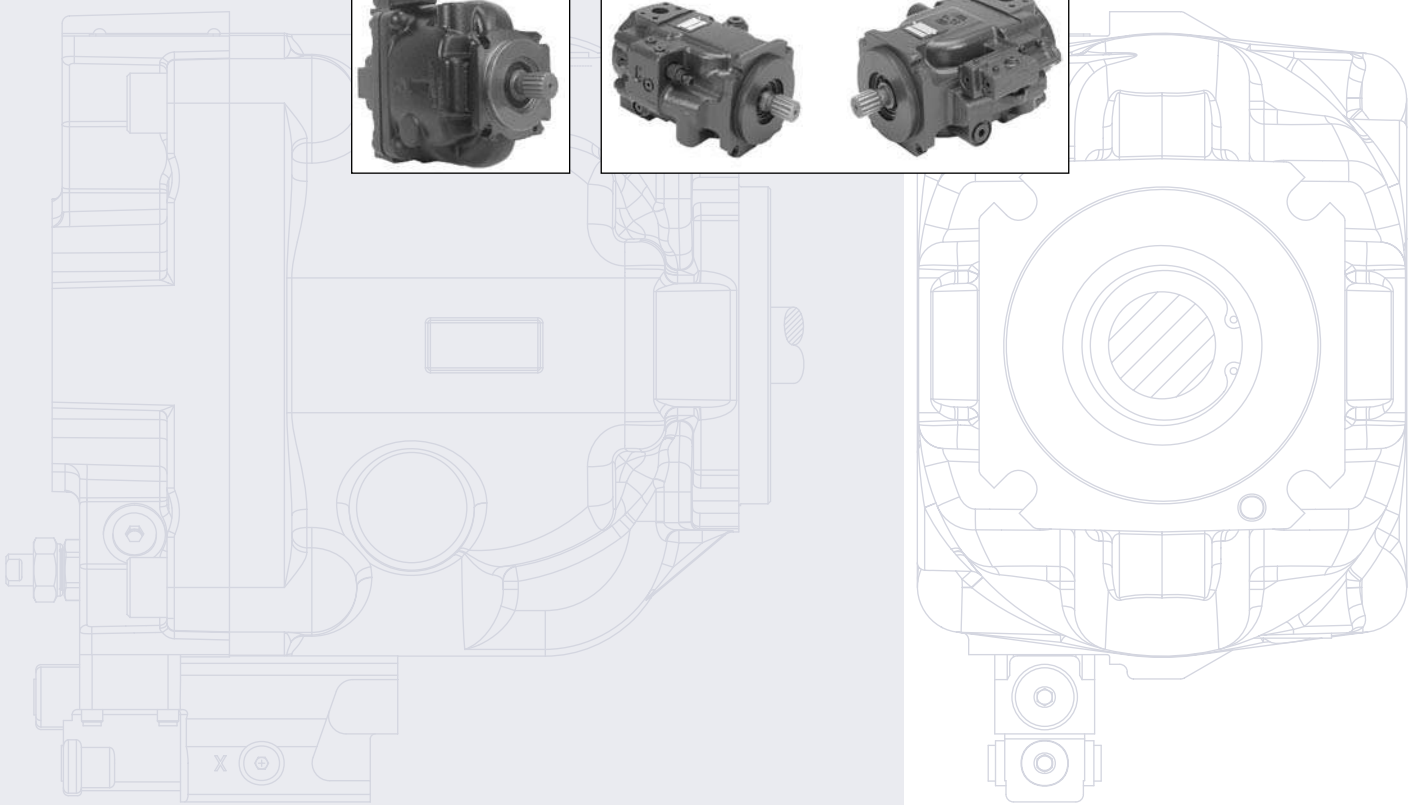

Series 45 Axial Piston Open Circuit Pumps
Technical Information
Using this manual

ORGANIZATION AND HEADINGS

To help you quickly find information in this manual, the material is divided into sections, topics, subtopics, and details, with descriptive headings set in red type. Section titles appear at the top of every page in large red type. Topic headings appear in the left hand column in **BOLD RED CAPITAL LETTERS**. Subtopic headings appear in the body text in **bold red type** and detail headings in *italic red type*.

References (example: See *Topic xyz*, page XX) to sections, headings, or other publications are also formatted in *red italic type*. In **P**ortable **D**ocument **F**ormat (**PDF**) files, these references represent clickable hyperlinks that jump to the corresponding document pages.

TABLES, ILLUSTRATIONS, AND COMPLEMENTARY INFORMATION

Tables, illustrations, and graphics in this manual are identified by titles set in *blue italic type* above each item. Complementary information such as notes, captions, and drawing annotations are also set in blue type.

References (example: See *Illustration abc*, page YY) to tables, illustrations, and graphics are also formatted in *blue italic type*. In PDF files, these references represent clickable hyperlinks that jump to the corresponding document pages.

SPECIAL TEXT FORMATTING

Defined terms and acronyms are set in **bold black type** in the text that defines or introduces them. Thereafter, the terms and acronyms receive no special formatting.

Black italic type is used in the text to emphasize important information, or to set-off words and terms used in an unconventional manner or alternative context. *Red* and *blue italics* represent hyperlinked text in the PDF version of this document (see above).

TABLE OF CONTENTS

An indented **T**able **o**f **C**ontents (**TOC**) appears on the next page. Tables and illustrations in the TOC set in blue type. In the PDF version of this document, the TOC entries are hyperlinked to the pages where they appear.

© 2003 Sauer-Danfoss. All rights reserved. Printed in U.S.A.

Sauer-Danfoss accepts no responsibility for possible errors in catalogs, brochures and other printed material. Sauer-Danfoss reserves the right to alter its products without prior notice. This also applies to products already ordered provided that such alterations aren't in conflict with agreed specifications. All trademarks in this material are properties of their respective owners. Sauer-Danfoss and the Sauer-Danfoss logotype are trademarks of the Sauer-Danfoss Group.

Front cover illustrations: F101 178, F101 179, F101 180, F101 168, P101 992

SAUER DANFOSS

Series 45 Axial Piston Open Circuit Pumps
Technical Information
Contents

GENERAL INFORMATION

Overview 8
Design 8
- High performance 8
- Latest technology 8
- Reliability 8

Typical applications 8
The Series 45 product family 9
- Basic units 9

Load sensing open circuit system 10
Pressure compensated controls 11
- Operation 11
- Pressure compensated system characteristics 11
- Typical applications for pressure compensated systems 11

Remote pressure compensated controls 12
- Remote pressure compensated system characteristics 12
- Typical applications for remote pressure compensated systems 12

Load sensing controls 13
- Operation 13
  - LS control with bleed orifice 13
  - Integral PC function 13
- Load sensing system characteristics 13
- Typical applications for load sensing systems 13

Operating parameters 14
- Fluids 14
- Viscosity 14
- Temperature 14
- Inlet pressure 14
- Case pressure 14
- Pressure ratings 15
- Speed ratings 15
- Duty cycle and pump life 15
- Speed, flow, and inlet pressure 15

Design parameters 16
- Installation 16
- Filtration 16
- Reservoir 16
- Fluid velocity 17
  - Velocity equations 17
- Shaft loads 17
  - Radial load formula 17
- Bearing life 17
- Mounting flange loads 18
  - Estimating overhung load moments 18
  - Shock load formula 18
  - Continuous load formula 18
- Auxiliary mounting pads 19
- Input shaft torque ratings 19
- Understanding and minimizing system noise 20

Sizing equations 21
- Flow 21
- Torque 21

SAUER DANFOSS

Series 45 Axial Piston Open Circuit Pumps
Technical Information
Contents

GENERAL INFORMATION (continued)

Sizing equations 21
- Power 21
- Variables 21

FRAMES L AND K

Design 22
Specifications 23
Performance L25C 24
Performance L30D 25
Performance K38C 26
Performance K45D 27
Order code 28
Controls 30
- Pressure compensated control (PC) 30
  - Specifications 30
  - Schematic diagram 30
- Remote PC Control (RP) 30
  - Specifications 30
  - Schematic diagram 30
- Load sensing control (LS) 31
  - Specifications 31
  - Schematic diagram 31
- Load sensing control with internal bleed orifice (LB) 31
  - Specifications 31
  - Schematic diagram 31

Input shafts 32
Auxiliary mounting pads 34
- SAE-A auxiliary mounting pad 34
- SAE-B auxiliary mounting pad 34

Displacement limiters 35
Installation drawings 36
- Axial ported endcap 36
- Radial ported endcap 38

FRAME H

Design 40
Specifications 41
Performance H57B 42
Performance H75D 43
Order code 44
Controls 46
- Pressure compensated control (PC) 46
  - Specifications 46
  - Schematic diagram 46
- Load sensing control (LS) 46
  - Specifications 46
  - Schematic diagram 46
- Load sensing control with internal bleed orifice (LB) 47
  - Specifications 47
  - Schematic diagram 47

Input shafts 48
Auxiliary mounting pads 51

SAUER DANFOSS

Series 45 Axial Piston Open Circuit Pumps
Technical Information
Contents

FRAME H (continued)

Auxiliary mounting pads 51
- SAE-A auxiliary mounting pad 51
- SAE-B auxiliary mounting pad 51
- SAE-C auxiliary mounting pad 52

Displacement limiters 52
Installation drawings 53
- Adjustable displacement limiter 53
- SAE-C mounting flange, axial ported endcap 54
- SAE-C mounting flange, radial ported endcap 56
- SAE-B mounting flange, axial ported endcap 58
- SAE-B mounting flange, radial ported endcap 60

FRAME G

Design 62
Specifications 63
Performance G74B 64
Performance G90C 65
Order code 66
Controls 68
- Pressure compensated control (PC) 68
  - Specifications 68
  - Schematic diagram 68
- Remote PC Control (RP) 68
  - Specifications 68
  - Schematic diagram 68
- Load sensing control (LS) 69
  - Specifications 69
  - Schematic diagram 69
- Load sensing control with internal bleed orifice (LB) 69
  - Specifications 69
  - Schematic diagram 69

Input shafts 70
Auxiliary mounting pads 71
- SAE-A auxiliary mounting pad 71
- SAE-B auxiliary mounting pad 71
- SAE-C auxiliary mounting pad 72

Displacement limiters 72
Installation drawings 73
- Adjustable displacement limiter 73
- Axial ported endcap 74
- Radial ported endcap 76

FRAME E

Design 78
Specifications 79
Performance E100B 80
Performance E130B 81
Performance E147C 82
Order code 83
Controls 85
- Pressure compensated control (PC) 85
  - Specifications 85

Contents

FRAME E (continued)

Controls....85
Pressure compensated control (PC)....85
Schematic diagram....85
Remote PC Control (RP)....85
Specifications....85
Schematic diagram....85
Load sensing control (LS)....86
Specifications....86
Schematic diagram....86
Load sensing control with internal bleed orifice (LB)....86
Specifications....86
Schematic diagram....86
Input shafts....87
Auxiliary mounting pads....89
SAE-A auxiliary mounting pad....89
SAE-B auxiliary mounting pad....89
SAE-C auxiliary mounting pad....90
Displacement limiters....90
Installation drawings....92
Axial ported endcap, clockwise rotation....92
Axial ported endcap, counterclockwise rotation....94
Radial ported endcap, clockwise rotation....96
Radial ported endcap, counterclockwise rotation....98

Contents

Series 45 Axial Piston Open Circuit Pumps
Technical Information
General information

OVERVIEW

Series 45 is a complete family of variable displacement, axial piston pumps for open circuit applications. Each frame within the Series 45 family is uniquely designed to optimize performance, size, and cost, matching the work function requirements of the demanding mobile equipment marketplace.

DESIGN

High performance

- Displacements from 25 cm^3 - 147 cm^3 [1.53 - 8.97 in^3/rev]
- Speeds up to 3600 rpm
- Pressures up to 310 bar [4495 psi] continuous, and 400 bar [5800 psi] peak
- Variety of control system options including load sensing and pressure compensated
- Through-drive capability for multi-circuit systems
- Range of mounting flanges, shafts, and porting options for ease of installation

Latest technology

- Customer-driven using quality function deployment (QFD) and design for manufacturability (DFM) techniques
- Optimized valve plates for maximum efficiency and quiet operation
- Computer-modeled castings to optimize inlet conditions for maximum pump speed
- Compact package size minimizing installation space requirements
- Heavy-duty tapered roller bearings for long life
- Single piece rigid housing to reduce noise and leak paths
- Integrated controls for high speed response and system stability

Reliability

- Designed to rigorous standards
- Proven in both laboratory and field
- Manufactured to rigid quality standards
- Long service life
- Significantly fewer parts
- No gasketed joints
- Robust input shaft bearings to handle large external shaft loads
- Integrated gauge ports for monitoring operating conditions

TYPICAL APPLICATIONS

- Cranes
- Telescopic handlers
- Forklift trucks
- Wheel loaders
- Sweepers
- Backhoe loaders
- Forestry and agricultural machinery
- Fan drives
- Other uses

THE SERIES 45 PRODUCT FAMILY

Basic units

The series 45 family of open circuit, variable piston pumps, offers a range of displacements from 25 to 147 cm³/rev [1.53 to 8.97 in³/rev]. With maximum speeds up to 3600 rpm and continuous operating pressures up to 310 bar [4495 psi], you can tailor product selection to the flow and pressure requirements of your individual application.

K/L Frame

H Frame

G Frame

E Frame

General performance specifications for the series 45 pump family

Pump	Displacement		Speed			Pressure				Theoretical flow (at rated speed)		Mounting
			Continuous	Max.	Min.	Continuous		Maximum				
Model	cm³	in³	min⁻¹ (rpm)	min⁻¹ (rpm)	min⁻¹ (rpm)	bar	psi	bar	psi	US gal/min	l/min	Flange
Frame L												*See page 22*
L25C	25	1.53	3200	3600	500	260	3770	350	5075	21.0	80.0	SAE B - 2 bolt
L30D	30	1.83	3200	3600	500	210	3045	300	4350	25.4	96.0	SAE B - 2 bolt
Frame K												*See page 22*
K38C	38	2.32	2650	2800	500	260	3770	350	5075	26.6	100.7	SAE B - 2 bolt
K45D	45	2.75	2650	2800	500	210	3045	300	4350	31.5	119.3	SAE B - 2 bolt
Frame H												*See page 40*
H57B	57	3.48	2600	3200	500	310	4495	400	5800	39.2	148.2	SAE B 2-bolt SAE C 4-bolt
H75D	75	4.58	2400	2800	500	210	3045	300	4350	47.6	180.0	SAE B 2-bolt SAE C 4-bolt
Frame G												*See page 62*
G74B	74	4.52	2400	2800	500	310	4495	400	5800	46.9	177.6	SAE C 4-bolt
G90C	90	5.49	2200	2600	500	260	3770	350	5075	52.3	198.0	SAE C 4-bolt
Frame E												*See page 78*
E100B	100	6.10	2450	2880	500	310	4495	400	5800	64.7	245.0	SAE C 4-bolt
E130B	130	7.93	2200	2600	500	310	4495	400	5800	76.5	286.0	SAE C 4-bolt
E147C	147	8.97	2100	2475	500	260	3770	350	5075	81.5	308.7	SAE C 4-bolt

LOAD SENSING OPEN CIRCUIT SYSTEM

The pump receives fluid directly from the reservoir through the inlet line. A screen in the inlet line protects the pump from large contaminants. The pump outlet feeds a PVG-32 multi-section, load sensing, directional control valve. The PVG valve directs pump flow to the cylinder and gear motor. A heat exchanger cools the fluid returning from the valve. A filter cleans the fluid before it returns to the reservoir.

Flow in the circuit determines the speed of the actuators. The position of the PVG valve determines the flow demand. A hydraulic pressure signal (LS signal) communicates demand to the pump control. The pump control monitors the pressure differential between pump outlet and the LS signal, and regulates servo pressure to control the swashplate angle. Swashplate angle determines pump flow.

Actuator load determines system pressure. The pump control monitors system pressure and will decrease the swashplate angle to reduce flow if system pressure reaches the PC setting. A system relief valve in the PVG valve acts as a back-up to control system pressure.

Pictorial circuit diagram

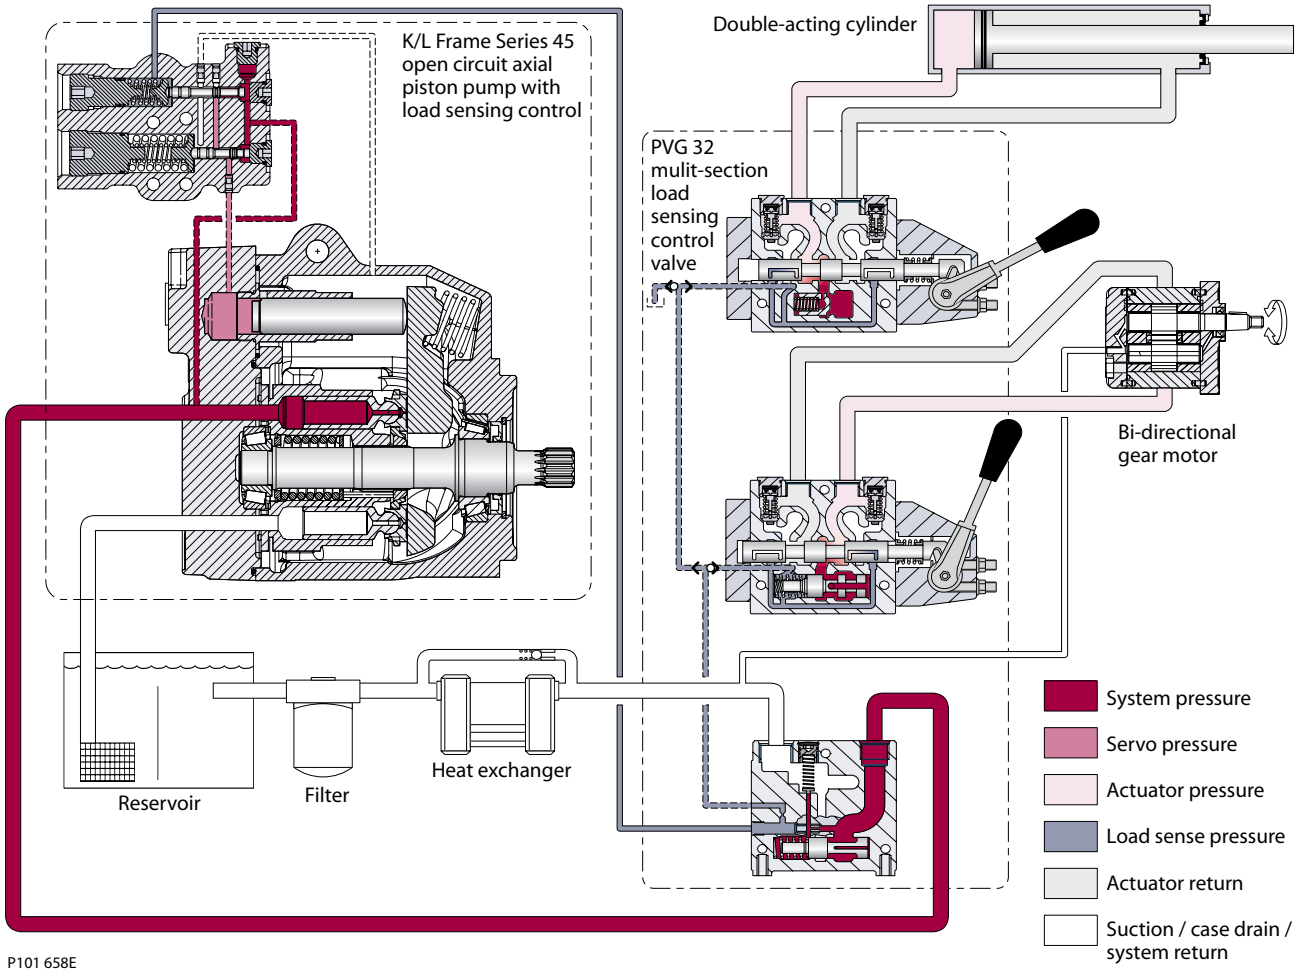

P101 658E

PRESSURE COMPENSATED CONTROLS

Operation

The PC control maintains constant system pressure in the hydraulic circuit by varying the output flow of the pump. Used with a closed center control valve, the pump remains in high pressure standby mode at the PC setting with zero flow until the function is actuated. This condition is often called a **dead head** condition.

Typical operating curve

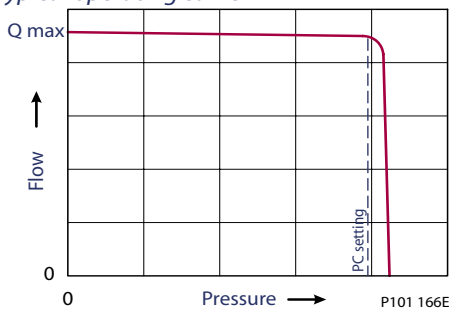

Simple closed-center circuit

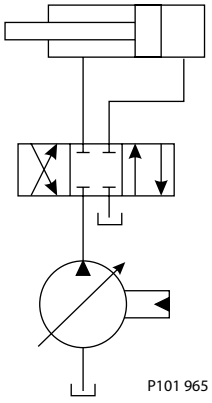

Once the closed center valve is opened, the PC control senses the immediate drop in system pressure and increases pump flow by increasing the swashplate angle. The pump continues to increase flow until system pressure reaches the PC setting. If system pressure exceeds the PC setting, the PC control reduces the swashplate angle to maintain system pressure by reducing flow. The PC control continues to monitor system pressure and changes swashplate angle to match the output flow with the work function pressure requirements.

If the demand for flow exceeds the capacity of the pump, the PC control directs the pump to maximum displacement. In this condition, actual system pressure depends on the actuator load.

Each section includes control schematic diagrams, setting ranges, and response / recovery times for each control available. **Response** is the time (in milliseconds) for the pump to reach full displacement when commanded by the control. **Recovery** is the time (in milliseconds) for the pump to reach zero displacement when commanded by the control. Actual times can vary depending on application conditions.

For additional system protection, install a relief valve in the pump outlet line.

Pressure compensated system characteristics

- Constant pressure and variable flow
- High pressure standby mode when flow is not needed
- System flow adjusts to meet system requirements
- Single pump can provide flow to multiple work functions
- Quick response to system flow and pressure requirements

Typical applications for pressure compensated systems

- Constant force cylinders (bailers, compactors, refuse trucks)
- On/off fan drives

REMOTE PRESSURE COMPENSATED CONTROLS

The remote PC control is a two-stage control that allows multiple PC settings. Remote PC controls are commonly used in applications requiring low and high pressure PC operation.

Typical operating curve

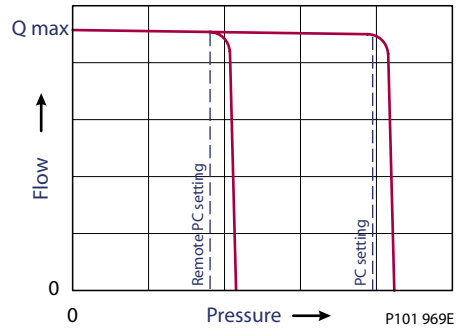

Closed center circuit with remote PC

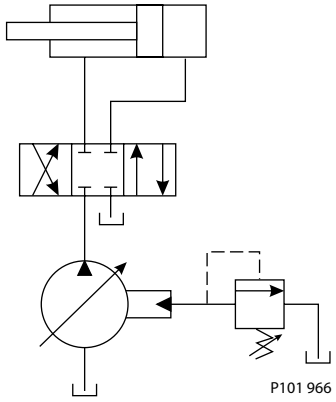

The remote PC control uses a pilot line connected to an external hydraulic valve. The external valve changes pressure in the pilot line, causing the PC control to operate at a lower pressure. When the pilot line is vented to reservoir, the pump maintains a low standby pressure of 15 to 20 bar [215 to 300 psi]. When pilot flow is blocked, the pump maintains pressure at the PC setting. An on-off solenoid valve can be used in the pilot line to create a low-pressure standby mode. A proportional solenoid valve, coupled with a microprocessor control, can produce an infinite range of operating pressures.

Each section includes control schematic diagrams, setting ranges, and response / recovery times for each control available. **Response** is the time (in milliseconds) for the pump to reach full displacement when commanded by the control. **Recovery** is the time (in milliseconds) for the pump to reach zero displacement when commanded by the control. Actual times can vary depending on application conditions.

Size the external valve and plumbing for a pilot flow of 3.8 l/min [1 US gal/min]. For additional system protection, install a relief valve in the pump outlet line.

Remote pressure compensated system characteristics

- Constant pressure and variable flow
- High or low pressure standby mode when flow is not needed
- System flow adjusts to meet system requirements
- Single pump can provide flow to multiple work functions
- Quick response to system flow and pressure requirements

Typical applications for remote pressure compensated systems

- Modulating fan drives
- Anti-stall control with engine speed feedback
- Front wheel assist

LOAD SENSING CONTROLS

Operation

The LS control matches system requirements for both pressure and flow in the circuit regardless of the working pressure. Used with a closed center control valve, the pump remains in low-pressure standby mode with zero flow until the valve is opened. The LS setting determines standby pressure.

Typical operating curve

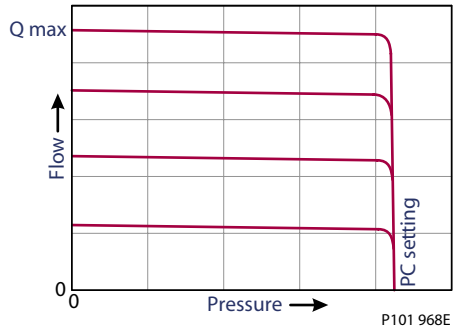

Load sensing circuit

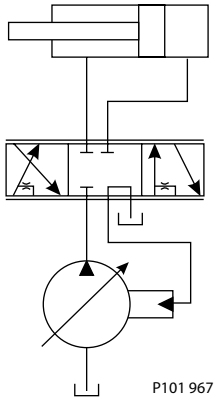

Most load sensing systems use parallel, closed center, control valves with special porting that allows the highest work function pressure (LS signal) to feed back to the LS control. **Margin pressure** is the difference between system pressure and the LS signal pressure. The LS control monitors margin pressure to read system demand. A drop in margin pressure means the system needs more flow. A rise in margin pressure tells the LS control to decrease flow.

LS control with bleed orifice

The load sense signal line requires a bleed orifice to prevent high-pressure lockup of the pump control. Most load-sensing control valves include this orifice. An optional internal bleed orifice is available, if needed.

Integral PC function

The LS control also performs as a PC control, decreasing pump flow when system pressure reaches the PC setting. The pressure compensating function has priority over the load sensing function.

Each section includes control schematic diagrams, setting ranges, and response / recovery times for each control available. **Response** is the time (in milliseconds) for the pump to reach full displacement when commanded by the control. **Recovery** is the time (in milliseconds) for the pump to reach zero displacement when commanded by the control. Actual times can vary depending on application conditions.

Load sensing system characteristics

- Variable pressure and flow
- Low pressure standby mode when flow is not needed
- System flow adjusted to meet system requirements
- Single pump can supply flow and regulate pressure for multiple circuits
- Quick response to system flow and pressure requirements

Typical applications for load sensing systems

- Priority steering
- Load independent flow control for boom lift, tilt, and rotation

OPERATING PARAMETERS

Fluids

Ratings and performance data for Series 45 products are based on operating with premium hydraulic fluids containing oxidation, rust, and foam inhibitors. These include premium turbine oils, API CD engine oils per SAE J183, M2C33F or G automatic transmission fluids (ATF), Dexron II (ATF) meeting Allison C-3 or Caterpillar T0-2 requirements, and certain specialty agricultural tractor fluids. For more information on hydraulic fluid selection, see Sauer-Danfoss publications **520L0463** *Hydraulic Fluids and Lubricants, Technical Information*, and **520L465** *Experience with Biodegradable Hydraulic Fluids, Technical Information*.

Viscosity

Maintain fluid viscosity within the recommended range for maximum efficiency and bearing life. **Minimum viscosity** should only occur during brief occasions of maximum ambient temperature and severe duty cycle operation. **Maximum viscosity** should only occur at cold start: Limit speeds until the system warms up.

Fluid viscosity limits

Condition		mm²/s (cSt)	SUS
ν min.	continuous	9	58
	intermittent	6.4	47
ν max.	continuous	110	500
	intermittent (cold start)	1000	4700

Temperature

Maintain fluid temperature within the limits shown in the table. **Minimum temperature** relates to the physical properties of the component materials. Cold oil will not affect the durability of the pump components. However, it may affect the ability of the pump to provide flow and transmit power. **Maximum temperature** is based on material properties. Don't exceed it. Measure maximum temperature at the hottest point in the system. This is usually the case drain.

Temperature limits

Minimum (intermittent, cold start)	- 40° C [- 40° F]
Continuous	82° C [180° F]
Maximum	104° C [220° F]

Ensure fluid temperature and viscosity limits are concurrently satisfied.

Inlet pressure

Maintain inlet pressure within the limits shown in the table. Low inlet pressure (vacuum) may limit maximum pump speed and cause cavitation. Refer to *Inlet pressure vs. speed* charts for each displacement.

Inlet pressure limits

Minimum (continuous)	0.8 bar absolute [6.7 in. Hg vac.] (at reduced maximum speed)
Minimum (cold start)	0.5 bar absolute [15.1 in. Hg vac.]

Case pressure

Maintain case pressure within the limits shown in the table. The housing must always be filled with hydraulic fluid.

Case pressure limits

Maximum (continuous)	0.5 bar [7 psi] above inlet
Intermittent (cold start)	2 bar [29 psi] above inlet

Caution

Operating outside of inlet and case pressure limits will damage the pump. To minimize this risk, use full size inlet and case drain plumbing, and limit line lengths.

OPERATING PARAMETERS (continued)

Pressure ratings

The specification tables in each section give maximum and continuous pressure ratings for each displacement. Not all displacements within a given frame operate under the same pressure limits. Definitions of the operating pressure limits appear below.

System pressure is the differential pressure between the outlet and inlet ports. It is the dominant operating variable affecting hydraulic unit life. High system pressure, which results from high load, reduces expected life. System pressure must remain at or below rated pressure during normal operation to achieve expected life.

Continuous working pressure is the average, regularly occurring operating pressure. Operating at or below this pressure should yield satisfactory product life. For all applications, the load should move below this pressure.

Maximum (peak) working pressure is the highest intermittent pressure allowed. Maximum machine load should never exceed this pressure.

Speed ratings

The specification tables in each section give minimum, maximum, and rated speeds for each displacement. Not all displacements within a given frame operate under the same speed limits. Definitions of these speed limits appear below.

Rated speed is the maximum recommended operating speed at full displacement and 1 bar abs. [0 in Hg vac] inlet pressure. Operating at or below this speed should yield satisfactory product life.

Maximum speed is the highest recommended operating speed at full power conditions. Operating at or beyond maximum speed requires positive inlet pressure and/or a reduction of pump outlet flow. Refer to *Inlet pressure vs. speed* charts for each displacement.

Minimum speed is the lowest operating speed allowed. Operating below this speed will not yield satisfactory performance.

Duty cycle and pump life

Knowing the operating conditions of your application is the best way to ensure proper pump selection. With accurate duty cycle information, your Sauer-Danfoss representative can assist in calculating expected pump life.

Speed, flow, and inlet pressure

Inlet pressure vs. speed charts in each section show the relationship between speed, flow, and inlet pressure for each displacement. Use these charts to ensure your application operates within the prescribed range.

The charts define the area of inlet pressures and speeds allowed for a given displacement. Operating at lower displacements allows greater speed or lower inlet pressure.

Sample inlet pressure vs. speed chart

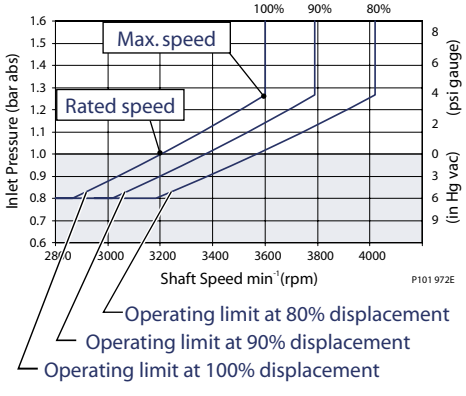

DESIGN PARAMETERS

Installation

Series 45 pumps may be installed in any position. To optimize inlet conditions, we recommend installing the pump at an elevation below the minimum reservoir fluid level. Design inlet plumbing to maintain inlet pressure within prescribed limits (see *Inlet pressure limits*, page 14)

Fill the pump housing and inlet line with clean fluid during installation. Connect the case drain line to the uppermost drain port (L1 or L2) to keep the housing full during operation.

To allow unrestricted flow to the reservoir, use a dedicated drain line. Connect it below the minimum reservoir fluid level and as far away from the reservoir outlet as possible. Use plumbing adequate to maintain case pressure within prescribed limits (see *Case pressure limits*, page 14).

Filtration

To prevent damage to the pump, including premature wear, fluid entering the pump inlet must be free of contaminants. Series 45 pumps require system filtration capable of maintaining fluid cleanliness at ISO 4406-1999 class 22/18/13 or better.

Sauer-Danfoss does not recommend suction line filtration. Suction line filtration can cause high inlet vacuum, which limits pump operating speed. Instead we recommend a 125 µm (150 mesh) screen in the reservoir covering the pump inlet. This protects the pump from coarse particle ingestion.

Return line filtration is the preferred method for open circuit systems. Consider these factors when selecting a system filter:

- Cleanliness specifications
- Contaminant ingression rates
- Flow capacity
- Desired maintenance interval

Typically, a filter with a beta ratio of $\beta_{10} = 10$ is adequate. However, because each system is unique, only a thorough testing and evaluation program can fully validate the filtration system. For more information, see Sauer-Danfoss publication **520L0467** *Design Guidelines for Hydraulic Fluid Cleanliness.*

Reservoir

The reservoir provides clean fluid, dissipates heat, and removes entrained air from the hydraulic fluid. It allows for fluid volume changes associated with fluid expansion and cylinder differential volumes. Minimum reservoir capacity depends on the volume needed to perform these functions. Typically, a capacity of one to three times the pump flow (per minute) is satisfactory.

Locate the reservoir outlet (suction line) near the bottom, allowing clearance for settling foreign particles. Place the reservoir inlet (return lines) below the lowest expected fluid level, as far away from the outlet as possible.

DESIGN PARAMETERS (continued)

Fluid velocity

Choose piping sizes and configurations sufficient to maintain optimum fluid velocity, and minimize pressure drops. This reduces noise, pressure drops, and overheating. It maximizes system life and performance.

Recommended fluid velocities

System lines	6 to 9 m/sec [20 to 30 ft/sec]
Suction line	1 to 2 m/sec [4 to 6 ft/sec]
Case drain	3 to 5 m/sec [10 to 15 ft/sec]

Typical guidelines; obey all pressure ratings.

Velocity equations

SI units

Q = flow (l/min)
A = area (mm²)

$$\text{Velocity} = \frac{16.67 \cdot Q}{A} \quad \text{(m/sec)}$$

US units

Q = flow (US gal/min)
A = area (in²)

$$\text{Velocity} = \frac{0.321 \cdot Q}{A} \quad \text{(ft/sec)}$$

Shaft loads

Series 45 pumps have tapered roller bearings capable of accepting external radial and thrust loads. The external radial shaft load limits are a function of the load position, orientation, and the operating conditions of the pump.

The maximum allowable radial load (R_e) is based on the maximum external moment (M_e) and the distance (L) from the mounting flange to the load. Compute radial loads using the formula below. Tables in each section give maximum external moment (M_e) and thrust load (T_{in}, T_{out}) limits for each pump frame size and displacement.

Radial load formula

$$M_e = R_e \cdot L$$

L = Distance from mounting flange to point of load
M_e = Maximum external moment
R_e = Maximum radial side load

Shaft load orientation

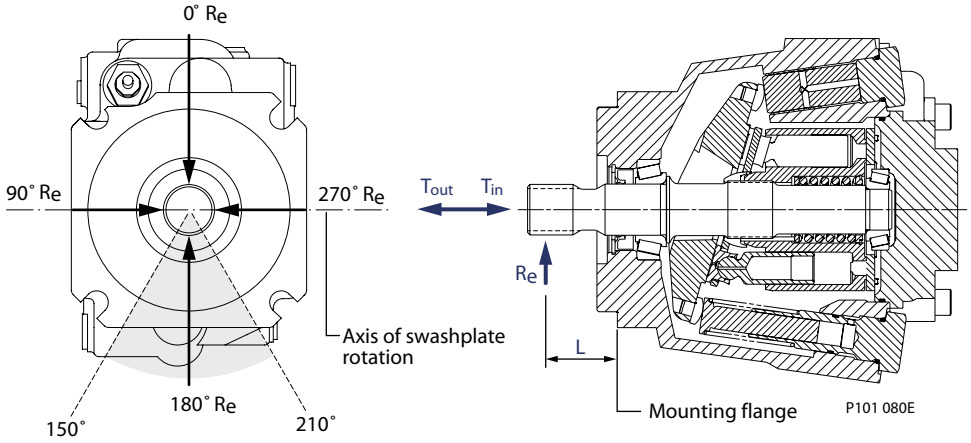

Bearing life

All shaft loads affect bearing life. In applications where external shaft loads can not be avoided, maximize bearing life by orientating the load between the 150° and 210° positions, as shown. We recommend tapered input shafts or clamp-type couplings for applications with radial shaft loads. Tables in each section give B_{10} bearing life for each pump frame size and displacement.

DESIGN PARAMETERS (continued)

Mounting flange loads

Adding auxiliary pumps and/or subjecting pumps to high shock loads may overload the pump mounting flange. Tables in each section give allowable continuous and shock load moments for each frame size. Applications with loads outside allowable limits require additional pump support.

- **Shock load moment** (M_s) is the result of an instantaneous jolt to the system.
- **Continuous load moments** (M_c) are generated by the typical vibratory movement of the application.

Estimating overhung load moments

Use the equations below to estimate the overhung load moments for multiple pump mounting. See installation drawings in each section to find the distance from the mounting flange to the center of gravity for each frame size. Refer to the technical specifications in each section to find pump weight.

Overhung load example

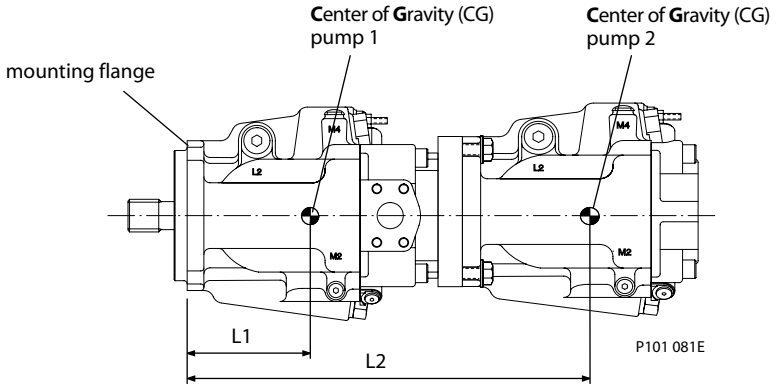

Shock load formula $M_s = G_s \cdot K \cdot (W_1 \cdot L_1 + W_2 \cdot L_2 + \ldots W_n \cdot L_n)$

Continuous load formula $M_c = G_c \cdot K \cdot (W_1 \cdot L_1 + W_2 \cdot L_2 + \ldots W_n \cdot L_n)$

SI units

M_s = Shock load moment (N•m)
M_c = Continuous (vibratory) load moment (N•m)
G_s = Acceleration due to external shock (G's)
G_c = Acceleration due to continuous vibration (G's)
K = Conversion factor = 0.00981
W_n = Mass of n^{th} pump (kg)
L_n = Distance from mounting flange to n^{th} pump CG (mm)

US units

M_s = Shock load moment (lbf•in)
M_c = Continuous (vibratory) load moment (lbf•in)
G_s = Acceleration due to external shock (G's)
G_c = Acceleration due to continuous vibration (G's)
K = Conversion factor = 1
W_n = Weight of n^{th} pump (lb)
L_n = Distance from mounting flange to n^{th} pump CG (in)

DESIGN PARAMETERS (continued)

Auxiliary mounting pads

Auxiliary mounting pads are available for all radial ported Series 45 pumps. Since the auxiliary pad operates under case pressure, use an O-ring to seal the auxiliary pump mounting flange to the pad. Oil from the main pump case lubricates the drive coupling.

- All mounting pads meet SAE J744 Specifications.
- The combination of auxiliary shaft torque and main pump torque must not exceed the maximum pump input shaft rating. Tables in each section give input shaft torque ratings for each frame size.
- Applications subject to severe vibratory or shock loading may require additional support to prevent mounting flange damage. Tables in each section give allowable continuous and shock load moments for each frame size.
- The drawing and table below give mating pump dimensions for each size mount. Refer to installation drawings in each section for auxiliary mounting pad dimensions.

Mating pump specifications

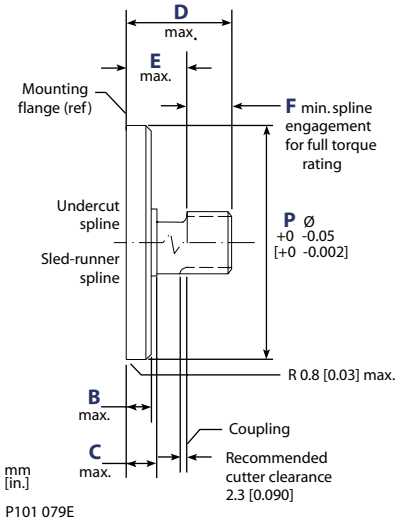

Dimensions

	SAE A	SAE B	SAE C
P	82.55 [3.250]	101.60 [4.000]	127.00 [5.000]
B	6.35 [0.250]	9.65 [0.380]	12.70 [0.500]
C	12.70 [0.500]	15.20 [0.600]	23.37 [0.920]
D	58.20 [2.290]	53.10 [2.090]	55.60 [2.190]
E	15.00 [0.590]	17.50 [0.690]	30.50 [1.200]
F	13.50 [0.530]	14.20 [0.560]	18.30 [0.720]

Input shaft torque ratings

Tables in each section give torque ratings for available input shafts. Ensure that your application respects these limits.

Continuous torque ratings for splined input shafts are based on spline tooth wear. Assuming good lubrication, no external radial loads, and minimum mating spline full depth hardness of 55 Rc; operating at or below continuous torque rating will yield satisfactory shaft life. Operating with insufficient lubrication increases spline wear.

Maximum torque ratings are based on shaft strength. Do not exceed them.

Sauer-Danfoss recommends mating splines adhere to ANSI B92.1-Class 5. Sauer-Danfoss external splines are modified class 5 fillet root side fit. The external major diameter and circular tooth thickness dimensions are reduced to ensure a good clearance fit with the mating spline. Tables in each section give full spline dimensions and data.

DESIGN PARAMETERS (continued)

Understanding and minimizing system noise

Tables in each section give sound levels for each frame size and displacement. Sound level data are collected at various operating speeds and pressures in a semi-anechoic chamber. Many factors contribute to the overall noise level of any application. Here is some information to help understand the nature of noise in fluid power systems, and some suggestions to help minimize it.

Noise is transmitted in fluid power systems in two ways: as fluid borne noise, and structure borne noise.

Fluid-borne noise (pressure ripple or pulsation) is created as pumping elements discharge oil into the pump outlet. It is affected by the compressibility of the oil, and the pump's ability to transition pumping elements from high to low pressure. Pulsations travel through the hydraulic lines at the speed of sound (about 1400 m/s [4600 ft/sec] in oil) until there is a change (such as an elbow) in the line. Thus, amplitude varies with overall line length and position.

Structure born noise is transmitted wherever the pump casing connects to the rest of the system. The way system components respond to excitation depends on their size, form, material, and mounting.

System lines and pump mounting can amplify pump noise. Follow these suggestions to help minimize noise in your application:

- Use flexible hoses.
- Limit system line length.
- If possible, optimize system line position to minimize noise.
- If you must use steel plumbing, clamp the lines.
- If you add additional support, use rubber mounts.
- Test for resonants in the operating range, if possible avoid them.

SIZING EQUATIONS

Use these equations to help choose the right pump size and displacement for your application:

	Based on SI units	Based on US units
Flow	Output flow $Q = \frac{V_g \cdot n \cdot \eta_v}{1000}$ (l/min)	Output flow $Q = \frac{V_g \cdot n \cdot \eta_v}{231}$ (US gal/min)
Torque	Input torque $M = \frac{V_g \cdot \Delta p}{20 \cdot \pi \cdot \eta_m}$ (N•m)	Input torque $M = \frac{V_g \cdot \Delta p}{2 \cdot \pi \cdot \eta_m}$ (lbf•in)
Power	Input power $P = \frac{M \cdot n \cdot \pi}{30\,000} = \frac{Q \cdot \Delta p}{600 \cdot \eta_t}$ (kW)	Input power $P = \frac{M \cdot n \cdot \pi}{198\,000} = \frac{Q \cdot \Delta p}{1714 \cdot \eta_t}$ (hp)

Variables SI units [US units]

V_g	=	Displacement per revolution	cm^3/rev [in^3/rev]
p_O	=	Outlet pressure	bar [psi]
p_i	=	Inlet pressure	bar [psi]
Δp	=	$p_O - p_i$ (system pressure)	bar [psi]
n	=	Speed	min^{-1} (rpm)
η_v	=	Volumetric efficiency	
η_m	=	Mechanical efficiency	
η_t	=	Overall efficiency ($\eta_v \cdot \eta_m$)	

Series 45 Axial Piston Open Circuit Pumps
Technical Information
Frames L and K

DESIGN

Series 45 Frame L and K pumps have a single servo piston design with a cradle-type swashplate set in polymer-coated journal bearings. A bias spring and internal forces increase swashplate angle. The servo piston decreases swashplate angle. Nine reciprocating pistons displace fluid from the pump inlet to the pump outlet as the cylinder block rotates on the pump input shaft. The block spring holds the piston slippers to the swashplate via the slipper retainer. The cylinder block rides on a bi-metal valve plate optimized for high volumetric efficiency and low noise. Tapered roller bearings support the input shaft and a viton lip-seal protects against shaft leaks.

An adjustable one spool (PC only, not shown) or two spool (LS and remote PC) control senses system pressure and load pressure (LS controls). The control ports system pressure to the servo piston to control pump output flow.

Frame K/L cross section

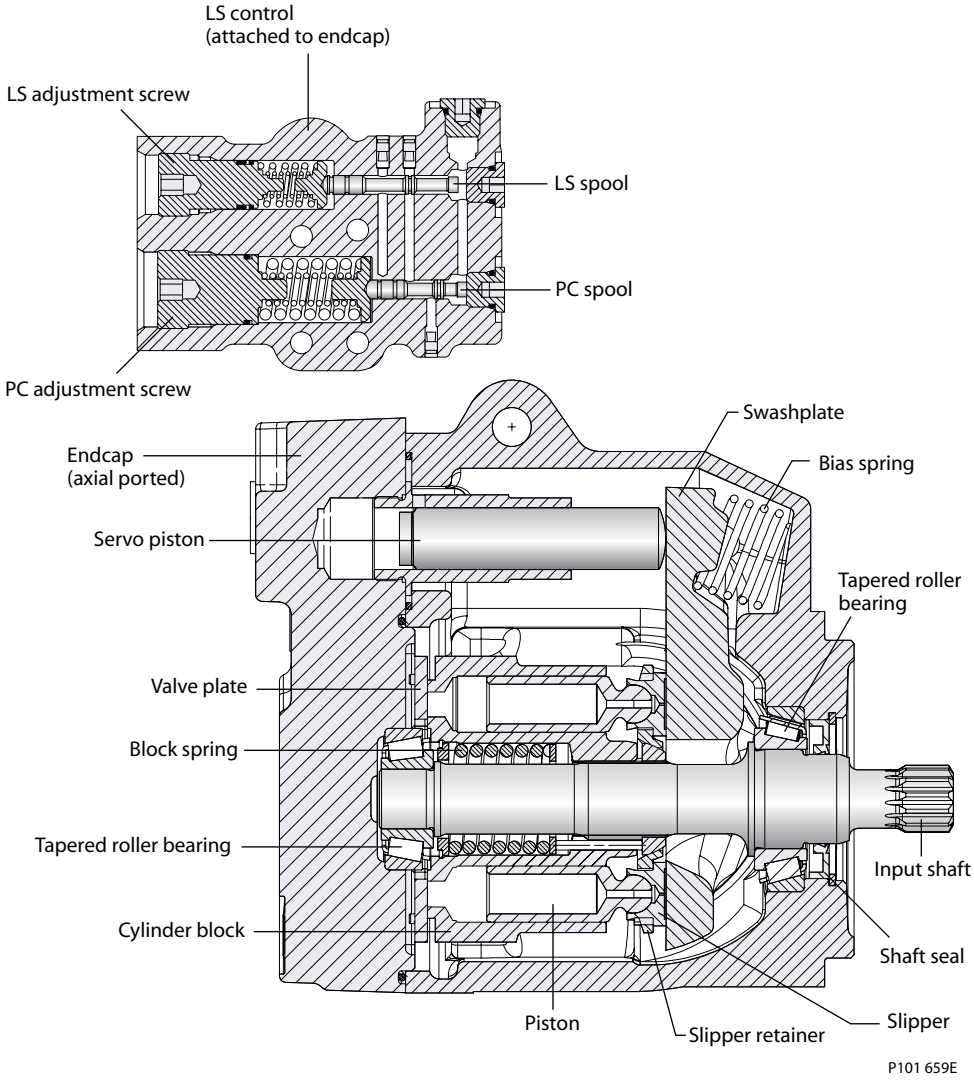

SAUER DANFOSS

Series 45 Axial Piston Open Circuit Pumps
Technical Information
Frames L and K

SPECIFICATIONS

For general operating parameters, including fluid viscosity, temperature, and inlet and case pressures, *see page 14*. For system design parameters, including installation, filtration, reservoir, and line velocities, *see page 16*.

Features and options

Feature		Unit	Model L25C	Model L30D	Model K38C	Model K45D
Maximum Displacement		cm³ [in³]	25 [1.53]	30 [1.83]	38 [2.32]	45 [2.75]
Flow at rated speed (theoretical)		l/min [US gal/min]	80 [21]	96 [25.4]	100.7 [26.6]	119.3 [31.5]
Input torque at maximum displacement (theoretical)		N•m/bar [lbf•in/1000 psi]	0.398 [243]	0.477 [291]	0.605 [369]	0.716 [438]
Mass moment of inertia of internal rotating components		kg•m² [slug•ft²]	0.00169 [0.00125]	0.00161 [0.00119]	0.00184 [0.00135]	0.00203 [0.00150]
Weight	Axial ports	kg [lb]	19 [42]			
	Radial ports		24 [53]			
Rotation			Clockwise, Counterclockwise			
Mounting			SAE-B			
Auxiliary mounting (*See page 34*)			SAE-A, SAE-B, SAE-BB			
System ports (type)			SAE O-ring boss			
System ports (location)			Axial, Radial			
Control types (*See page 30*)			PC, Remote PC, LS, LS with internal bleed			
Shafts (*See page 32*)		Splined	13 tooth, 15 tooth			
		Tapered	Ø 25.4 mm [1 in], 1:8 taper Ø 22.23 mm [0.875 in], 1:8 taper			
		Straight	Ø 22.23 mm [0.875 in] (short)		Ø 22.23 mm [0.875 in] (long)	
Displacement limiters (*See page 35*)			Optional, adjustable			

For definitions of pressure and speed ratings, *see page 15*. For more information on external shaft loads, *see page 17*; mounting flange loads, *see page 18*.

Ratings

Rating		Units	Model L25C	Model L30D	Model K38C	Model K45D
Input speed[1]	minimum	min⁻¹ (rpm)	500	500	500	500
	continuous		3200	3200	2650	2560
	maximum		3600	3600	2800	2800
Working pressure	continuous	bar [psi]	260 [3770]	210 [3045]	260 [3770]	210 [3045]
	maximum		350 [5075]	300 [4350]	350 [5075]	300 [4350]
External shaft loads	External moment (M_e)	N•m [lbf•in]	61 [540]	61 [540]	76 [673]	76 [673]
	Thrust in (T_{in}), out (T_{out})	N [lbf]	1000 [225]	1000 [225]	1200 [270]	1200 [270]
Bearing life	at 140 bar [2030 psi]	B_{10} hours	49 100	24 600	35 300	19 600
	at 210 bar [3045 psi]		14 100	7230	11 400	6200
	at 260 bar [3770 psi]		6590	—	5870	—
Mounting flange load moments	Vibratory (continuous)	N•m [lbf•in]	1005 [8895]			
	Shock (max)		3550 [31 420]			

1. Input speeds are valid at 1 bar absolute [0 in Hg vac] inlet pressure. See *Inlet pressure vs. speed* charts.

For more information on noise levels, *see page 20*.

Sound levels[2]

dB(A)	210 bar [3045 psi]		260 bar [3770 psi]	
Pump model	1800 min⁻¹(rpm)	Rated speed	1800 min⁻¹(rpm)	Rated speed
L25C	65	69	66	70
L30D	66	70	—	—
K38C	65	70	66	71
K45D	66	71	—	—

2. Sound data was collected in a *semi-anechoic* chamber. Values have been adjusted (-3 dB) to reflect *anechoic* levels.

PERFORMANCE L25C

Flow and power data valid at 49°C [120°F] and viscosity of 17.8 mm²/sec [88 SUS].

Flow vs. speed

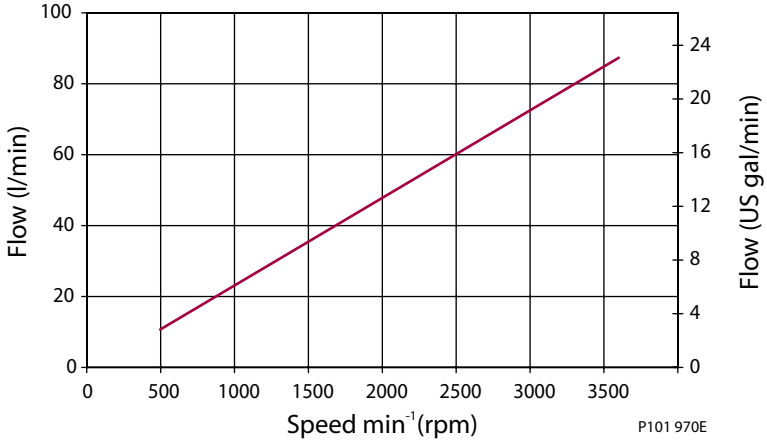

Input power vs. speed

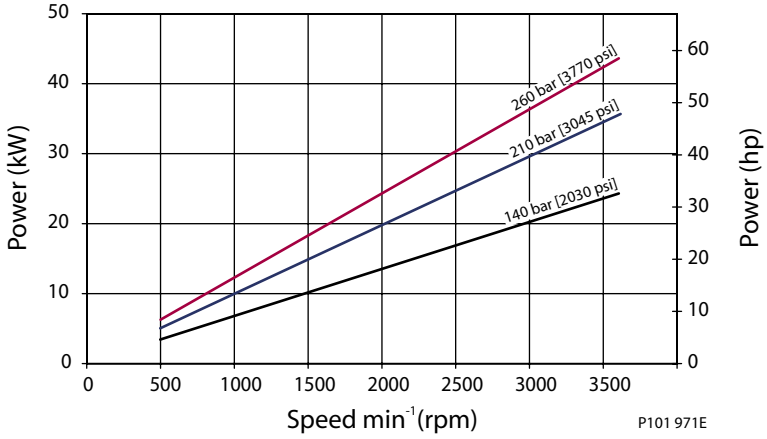

The chart on the right shows allowable inlet pressure and speed at various displacements. Greater speeds and lower inlet pressures are possible at reduced displacement. Operating outside of acceptable limits reduces pump life.

Inlet pressure vs. speed

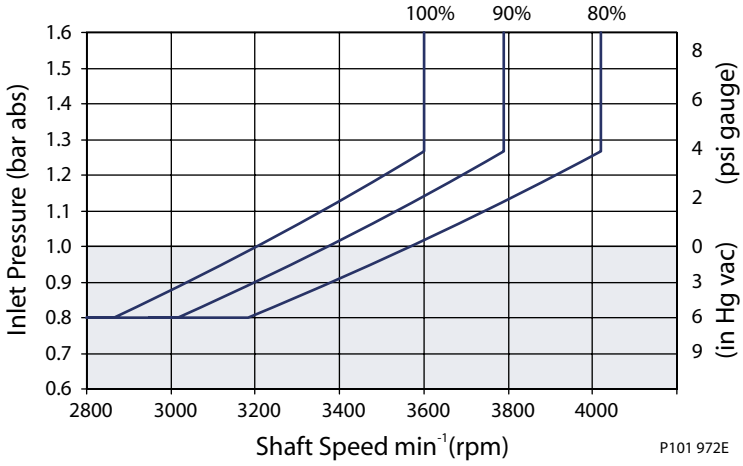

PERFORMANCE L30D

Flow and power data valid at 49°C [120°F] and viscosity of 17.8 mm²/sec [88 SUS].

Flow vs. speed

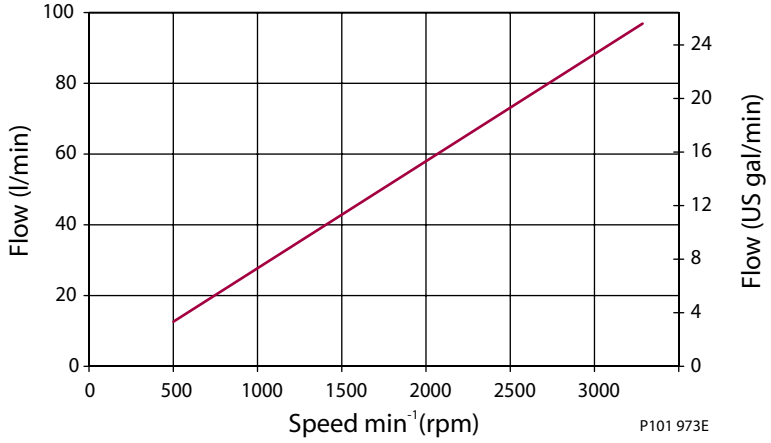

Input power vs. speed

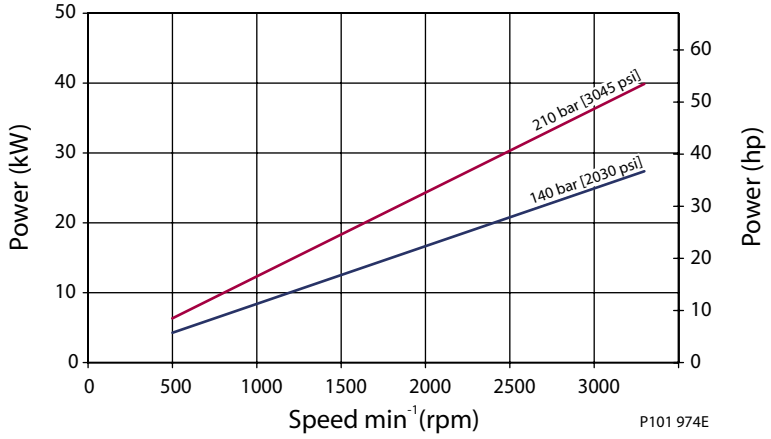

The chart on the right shows allowable inlet pressure and speed at various displacements. Greater speeds and lower inlet pressures are possible at reduced displacement. Operating outside of acceptable limits reduces pump life.

Inlet pressure vs. speed

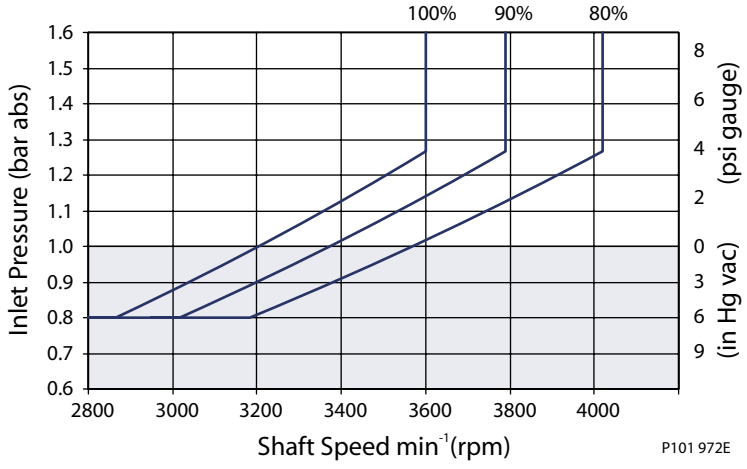

PERFORMANCE K38C

Flow and power data valid at 49°C [120°F] and viscosity of 17.8 mm²/sec [88 SUS].

Flow vs. speed

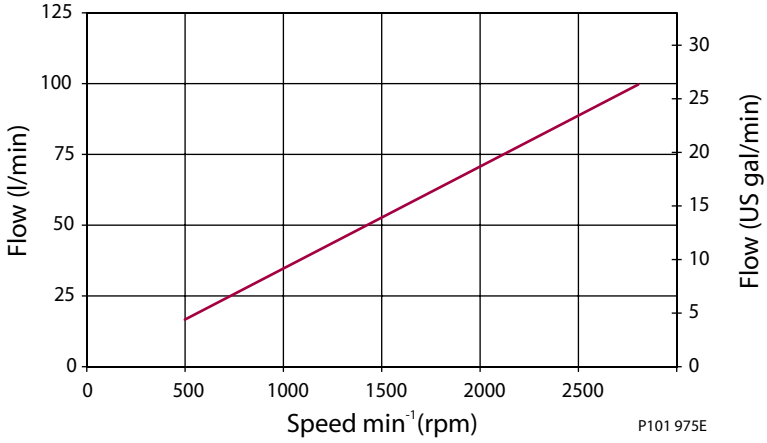

Input power vs. speed

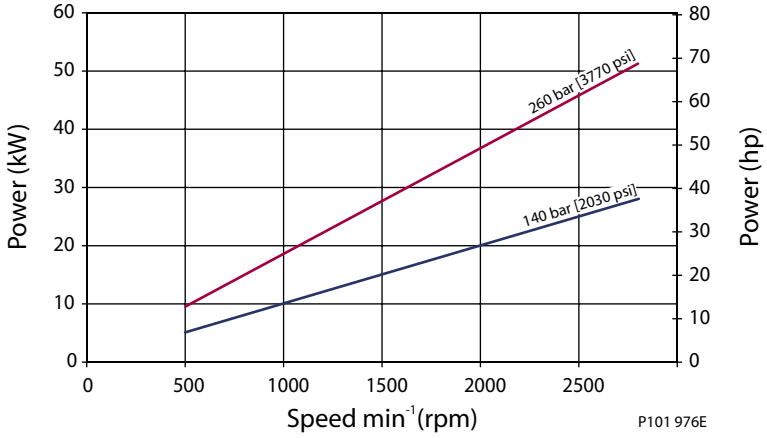

The chart on the right shows allowable inlet pressure and speed at various displacements. Greater speeds and lower inlet pressures are possible at reduced displacement. Operating outside of acceptable limits reduces pump life.

Inlet pressure vs. speed

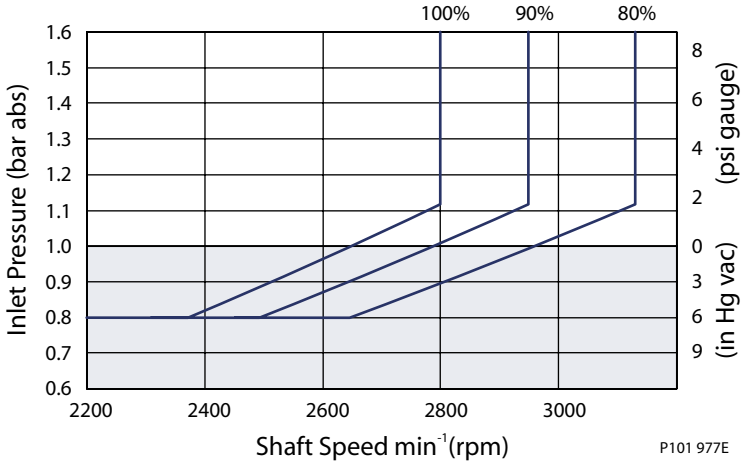

PERFORMANCE K45D

Flow and power data valid at 49°C [120°F] and viscosity of 17.8 mm²/sec [88 SUS].

Flow vs. speed

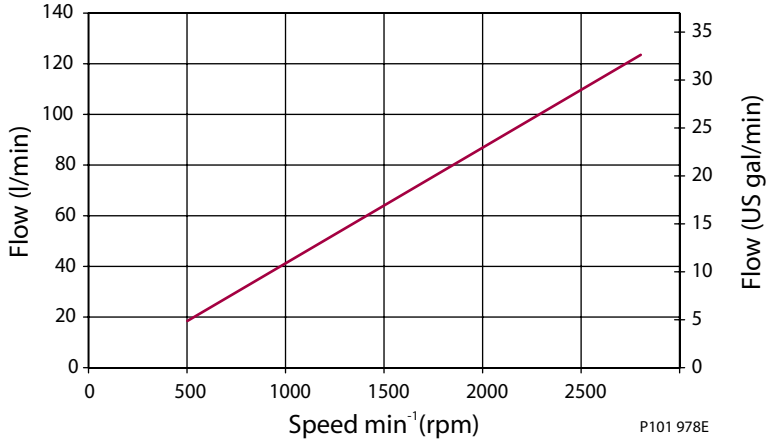

Input power vs. speed

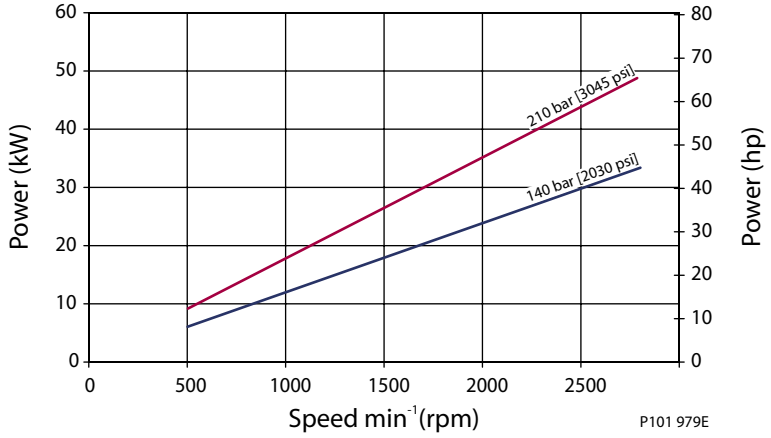

The chart on the right shows allowable inlet pressure and speed at various displacements. Greater speeds and lower inlet pressures are possible at reduced displacement. Operating outside of acceptable limits reduces pump life.

Inlet pressure vs. speed

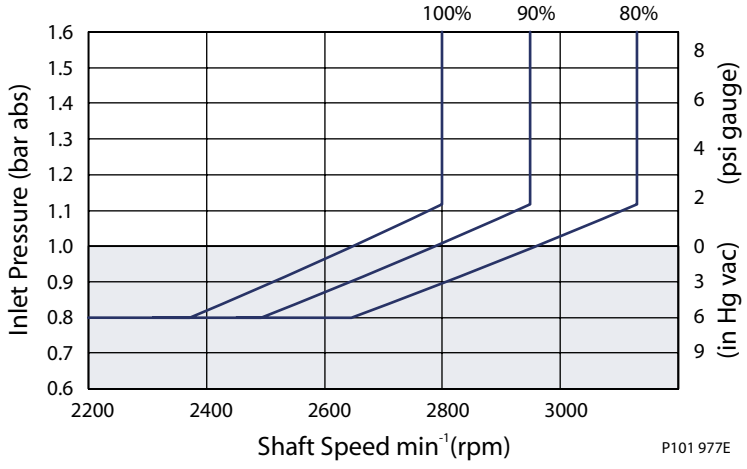

Series 45 Axial Piston Open Circuit Pumps
Technical Information
Frames L and K

ORDER CODE

R *Product*

KR	K Frame, variable displacement open circuit pump
LR	L Frame, variable displacement open circuit pump

S *Rotation*

L	Left hand (counterclockwise)
R	Right hand (clockwise)

P *Displacement and pressure rating*

025C	025 cm³/rev [1.53 in³/rev], 260 bar [3770 psi] continuous working pressure
030D	030 cm³/rev [1.83 in³/rev], 210 bar [3045 psi] continuous working pressure
038C	038 cm³/rev [2.32 in³/rev], 260 bar [3770 psi] continuous working pressure
045D	045 cm³/rev [2.75 in³/rev], 210 bar [3045 psi] continuous working pressure

C *Control type*

PC	Pressure compensated control
RP	Remote pressure compensated control
LS	Load sensing / pressure compensating control
LB	Load sensing / pressure compensating control with internal bleed orifice

D *PC setting (2 digit code, 10 bar increments)*

Example	10 = 100
10–26	100 to 260 bar [1450 to 3770 psi] (025C and 038C)
10–21	100 to 210 bar [1450 to 3045 psi] (030D and 045D)

E *Load sensing setting (2 digit code, 1 bar increments)*

Example	20 = 20 bar
12–40	12 to 40 bar [174 to 580 psi]
NN	Not applicable (use with PC and RP controls)

F *Not used*

NN	Not applicable

G *Pilot orifice*

N	None (standard)

H *Gain orifice*

3	Standard orifice

Series 45 Axial Piston Open Circuit Pumps
Technical Information
Frames L and K

ORDER CODE (continued)

J1 *Input shaft*

C2	13 tooth, 16/32 pitch (ANSI A92.1 1970 - Class 5)
C3	15 tooth, 16/32 pitch (ANSI A92.1 1970 - Class 5)
T1	Ø 25.4 mm [1 in], 1:8 taper
T2	Ø 22.23 mm [0.875 in], 1:8 taper
K1	Ø 22.23 mm [0.875 in] (short)
K2	Ø 22.23 mm [0.875 in] (long)

J2 *Auxiliary mounting flange*

N	None
A	SAE-A, 9-tooth output spline
T	SAE-A, 11-tooth output spline
B	SAE-B, 13-tooth output spline
V	SAE-BB, 15-tooth output spline

J3 *System port size and location*

Code	Location	Port type	Inlet size	Outlet size
F	Axial	O-ring boss	1 7/8 in.	1 5/16 in.
G	Radial	O-ring boss	1 7/8 in.	1 5/16 in.

K1 *Shaft seal*

A	Single lip seal, viton

K2 *Mounting flange and housing port style*

6	SAE-B 2-bolt, SAE O-ring boss housing ports

K3 *Not used*

N	Not applicable

L *Displacement limiter*

KNB	None
PLB	Endcap machined and plugged
AAA	Adjustable, factory set at max angle

M *Special hardware*

NNN	None

N *Special features*

NNN	None

CONTROLS

Pressure compensated control (PC)

Specifications

PC control setting range

Model	bar	psi
L25C	100–260	1450–3770
L30D	100–210	1450–3045
K38C	100–260	1450–3770
K45D	100–210	1450–3045

*Response/recovery times**

(ms)	Response	Recovery
L25C	30	90
L30D	30	100
K38C	30	105
K45D	30	110

* For definitions, *see page 11*.

Schematic diagram

PC schematic

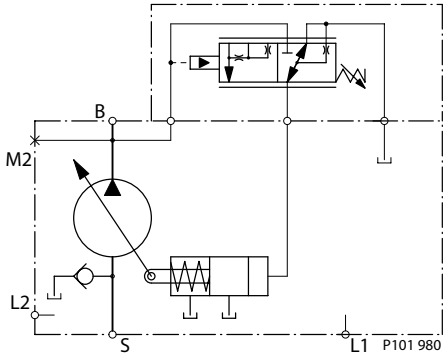

Legend

B = Outlet
S = Inlet
L1, L2 = Case drain
M2 = System pressure gauge port

Remote PC Control (RP)

Specifications

PC control setting range

Model	bar	psi
L25C	100–260	1450–3770
L30D	100–210	1450–3045
K38C	100–260	1450–3770
K45D	100–210	1450–3045

*Response/recovery times**

(ms)	Response	Recovery
L25C	30	90
L30D	30	100
K38C	30	105
K45D	30	110

* For definitions, *see page 12*.

Schematic diagram

Remote PC schematic

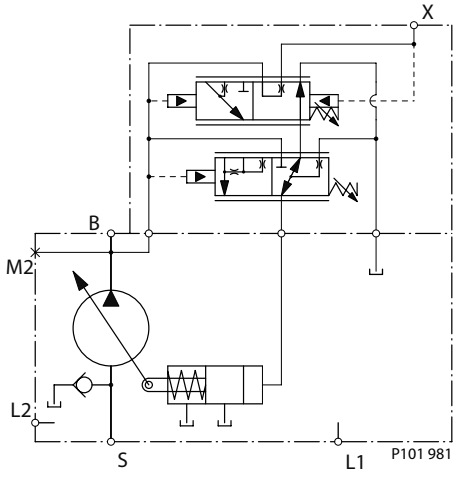

Legend

B = Outlet
S = Inlet
L1, L2 = Case drain
M2 = System pressure gauge port
X = Remote PC port

CONTROLS (continued)

Load sensing control (LS)

Specifications

PC setting range

Model	bar	psi
L25C	100–260	1450–3770
L30D	100–210	1450–3045
K38C	100–260	1450–3770
K45D	100–210	1450–3045

*Response/recovery times**

(ms)	Response	Recovery
L25C	30	70
L30D	30	70
K38C	30	80
K45D	30	80

* For definitions, *see page 13*.

Schematic diagram

LS Schematic

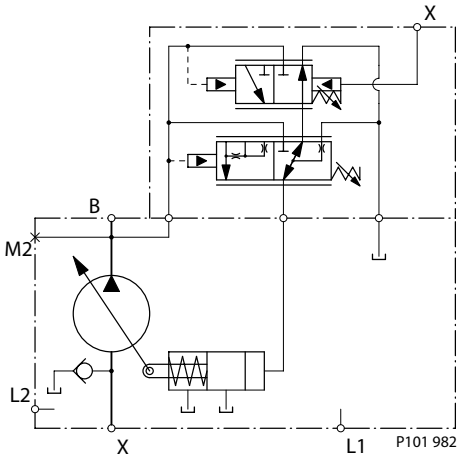

LS setting range

Model	bar	psi
All	12–40	174–580

Legend

B = Outlet
S = Inlet
L1, L2 = Case drain
M2 = System pressure gauge port
X = LS signal port

Load sensing control with internal bleed orifice (LB)

Specifications

PC setting range

Model	bar	psi
L25C	100–260	1450–3770
L30D	100–210	1450–3045
K38C	100–260	1450–3770
K45D	100–210	1450–3045

*Response/recovery times**

(ms)	Response	Recovery
L25C	30	70
L30D	30	70
K38C	30	80
K45D	30	80

* For definitions, *see page 13*.

Schematic diagram

LB Schematic

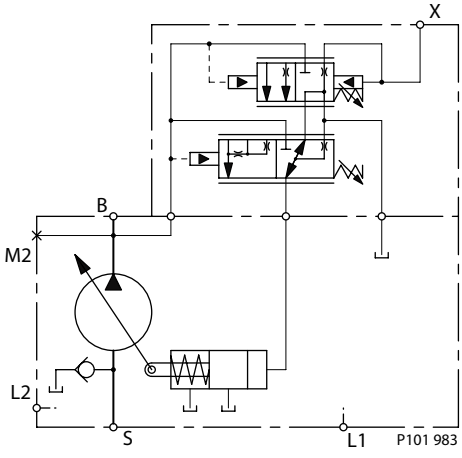

LS setting range

Model	bar	psi
All	12–40	174–580

Legend

B = Outlet
S = Inlet
L1, L2 = Case drain
M2 = System pressure gauge port
X = LS signal port

INPUT SHAFTS

Code	Description	Torque rating[1] Continuous N•m [lbf•in]	Torque rating[1] Maximum N•m [lbf•in]	Drawing
C2	13 tooth spline 16/32 pitch (ANSI A92.1 1970 - Class 5)	93 [820]	288 [2546]	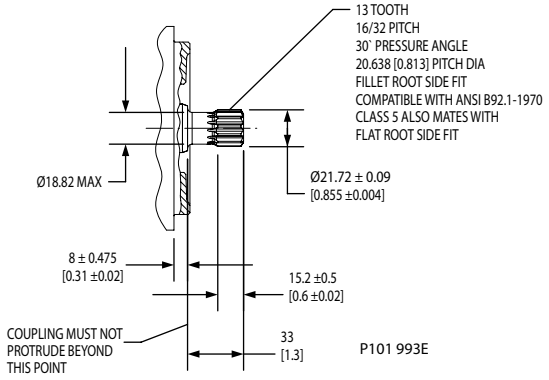
C3	15 tooth spline 16/32 pitch (ANSI A92.1 1970 - Class 5)	183 [1624]	404 [3575]	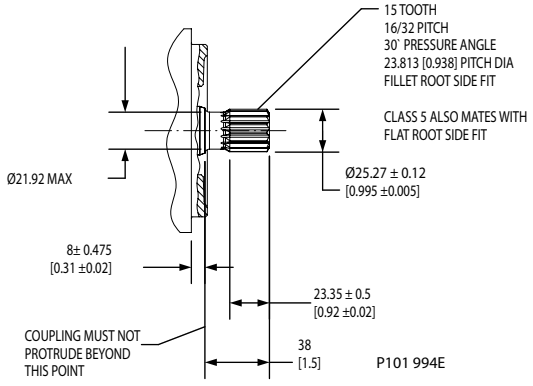
T1	Ø 25.4 mm [1 in] 1:8 taper (SAE J501)	N/A	362 [3200]	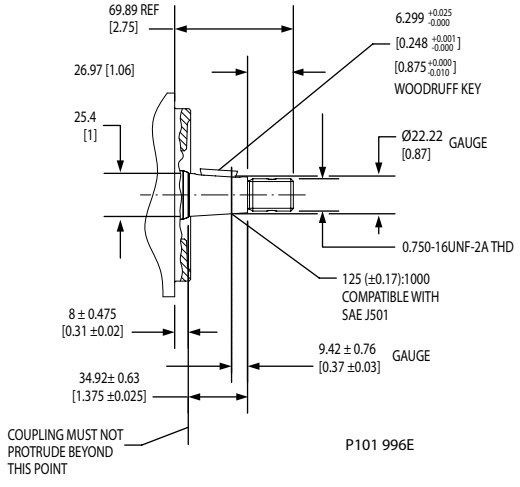

1. See *Input shaft torque ratings*, page 19 for definitions of continuous and maximum torque.

INPUT SHAFTS (continued)

Code	Description	Torque rating[1]		Drawing
		Continuous N•m [lbf•in]	Maximum N•m [lbf•in]	
T2	Ø 22.23 mm [0.875 in] 1:8 taper (SAE J501)	N/A	305 [2700]	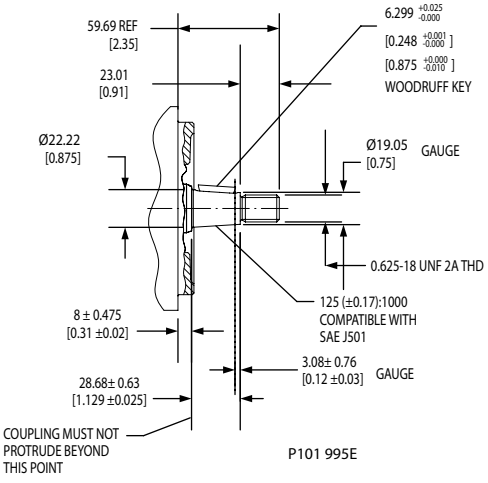
K1	Ø 22.23 mm [0.875 in] 33 mm [1.3 in] long	N/A	305 [2700]	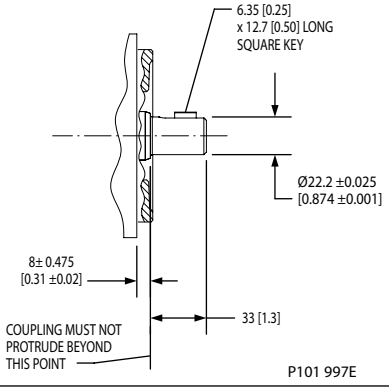
K2	Ø 22.23 mm [0.875 in] 63 mm [2.48 in] long	N/A	305 [2700]	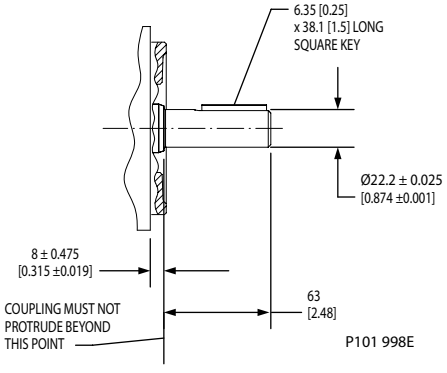

1. See *Input shaft torque ratings*, page 19 for definitions of continuous and maximum torque.

AUXILIARY MOUNTING PADS

See page 19 for mating pump pilot and spline dimensions.

SAE-A auxiliary mounting pad

Dimensions

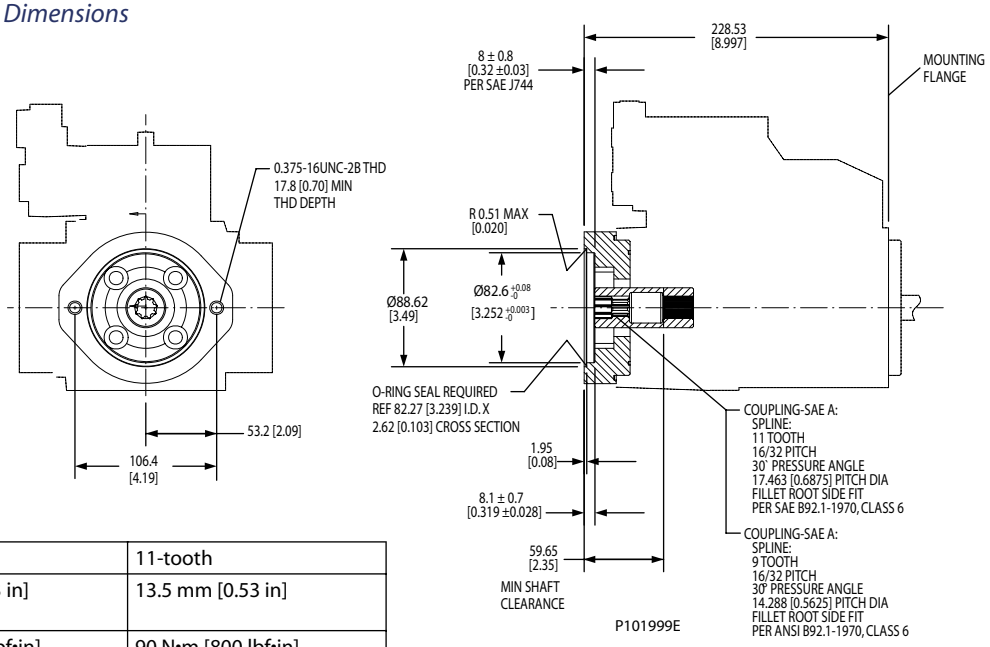

Specifications

Coupling	9-tooth	11-tooth
Spline minimum engagement	13.5 mm [0.53 in]	13.5 mm [0.53 in]
Continuous torque	51 N•m [450 lbf•in]	90 N•m [800 lbf•in]
Maximum torque	107 N•m [950 lbf•in]	147 N•m [1300 lbf•in]

SAE-B auxiliary mounting pad

Dimensions

See page 19 for mating pump pilot and spline dimensions.

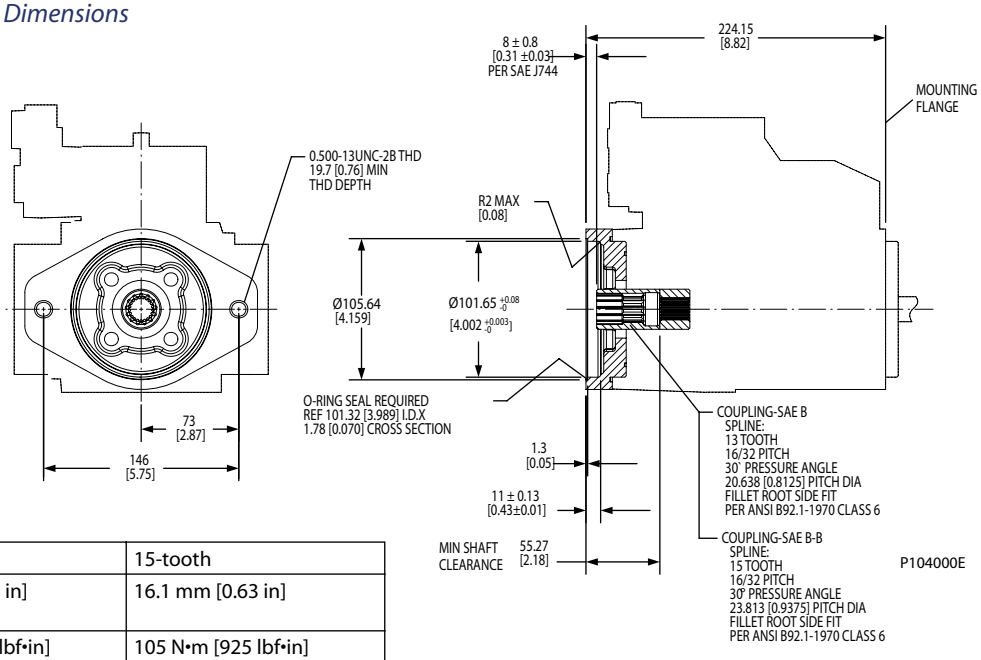

Specifications

Coupling	13-tooth	15-tooth
Spline minimum engagement	14.2 mm [0.56 in]	16.1 mm [0.63 in]
Continuous torque	100 N•m [885 lbf•in]	105 N•m [925 lbf•in]
Maximum torque	171 N•m [1512 lbf•in]	171 N•m [1512 lbf•in]

DISPLACEMENT LIMITERS

L and K Frame open circuit pumps are available with an optional adjustable displacement limiter. This adjustable stop limits the pump's maximum displacement.

Setting range

L25C	0 to 25 cm³ [0 to 1.53 in³]
L30D	0 to 30 cm³ [0 to 1.83 in³]
K38C	0 to 38 cm³ [0 to 2.32 in³]
K45D	0 to 45 cm³ [0 to 2.75 in³]

Displacement limiter cross-section

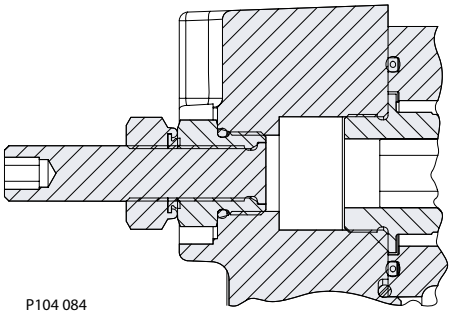

P104 084

INSTALLATION DRAWINGS

Axial ported endcap

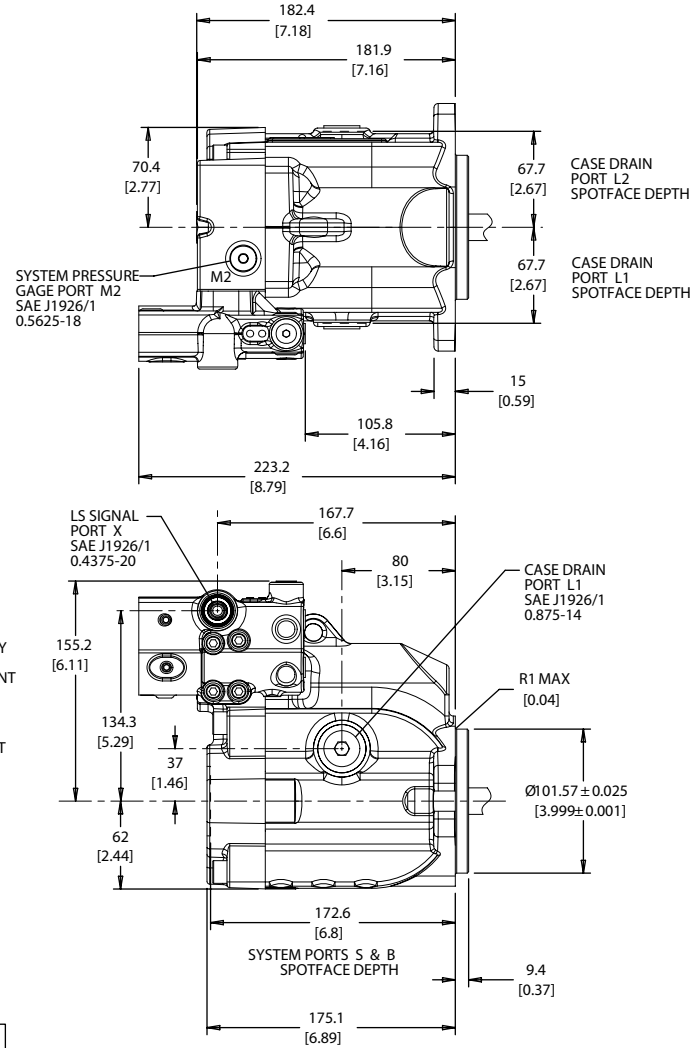

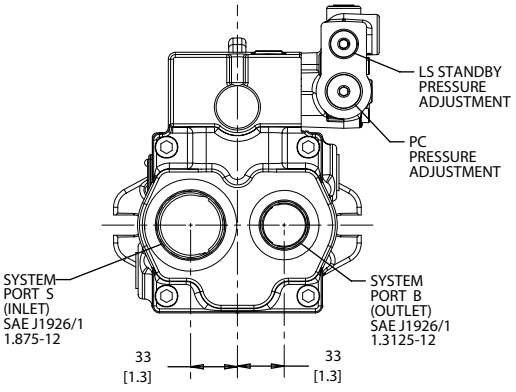

Clockwise rotation

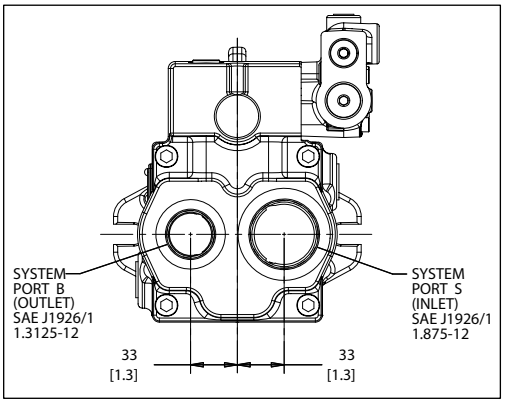

Counterclockwise rotation

P104064E

Third-angle projection mm [in]

INSTALLATION DRAWINGS (continued)

Axial ported endcap (continued)

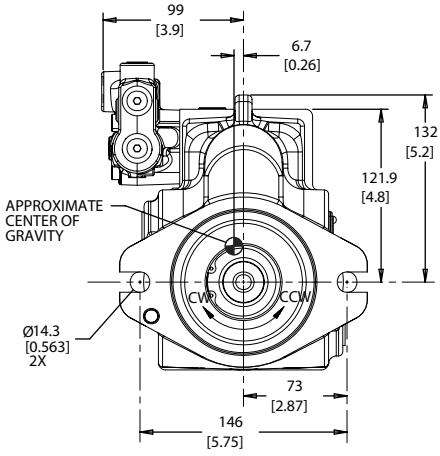

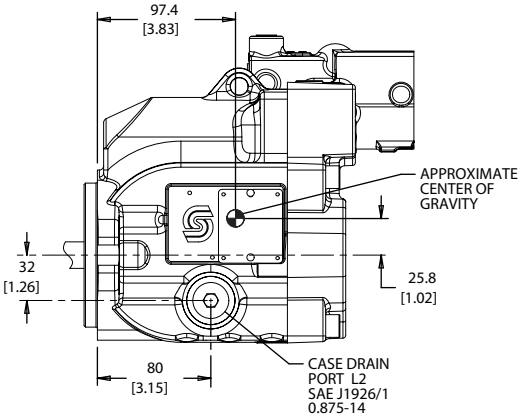

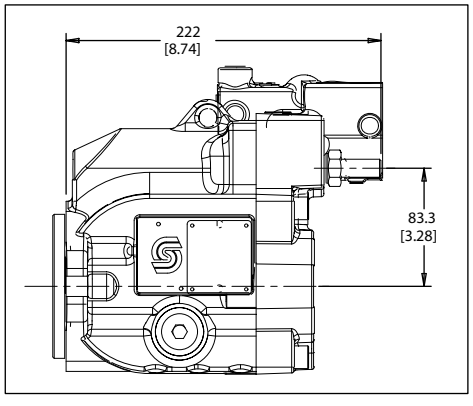

Adjustable displacement limiter

P104064E

Third-angle projection mm [in]

INSTALLATION DRAWINGS (continued)

Radial ported endcap

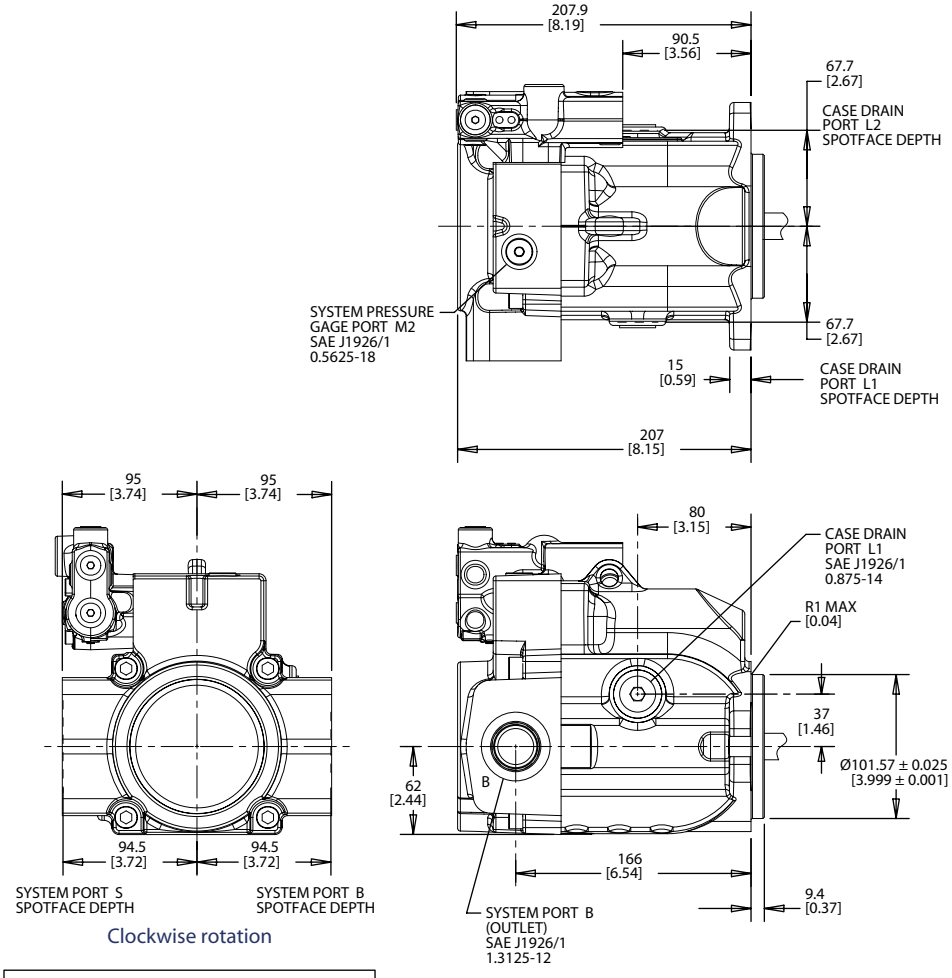

Clockwise rotation

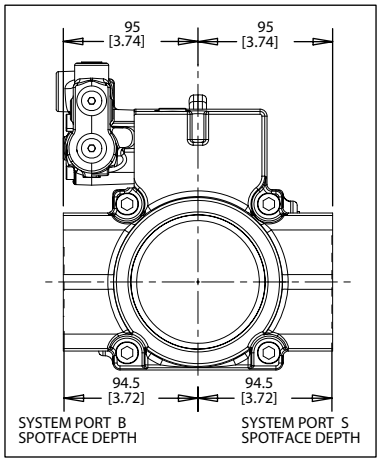

Counterclockwise rotation

P104 065E

Third-angle projection
mm [in]

INSTALLATION DRAWINGS (continued)

Radial ported endcap (continued)

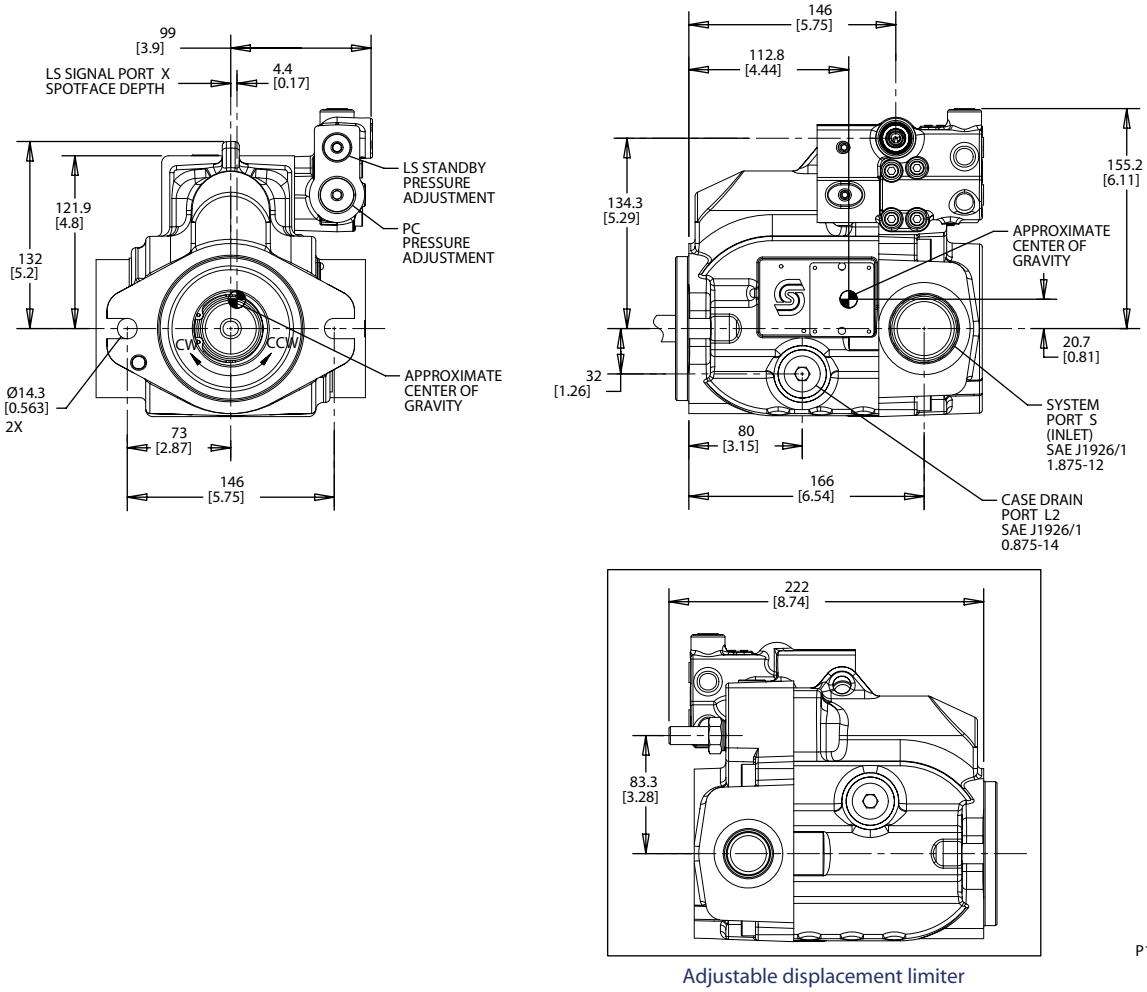

P104 065E

Adjustable displacement limiter

Third-angle projection mm [in]

DESIGN

Series 45 Frame H pumps have a dual servo piston design with a cradle-type swashplate set in polymer-coated journal bearings. The bias piston increases swashplate angle. The displacement piston decreases swashplate angle. At equal pressure, the larger diameter displacement piston overpowers the bias piston. Nine reciprocating pistons displace fluid from the pump inlet to the pump outlet as the cylinder block rotates on the pump input shaft. The block spring holds the piston slippers to the swashplate via the slipper retainer. The cylinder block rides on a bi-metal valve plate optimized for high volumetric efficiency and low noise. Tapered roller bearings support the input shaft and a viton lip-seal protects against shaft leaks.

An integral, adjustable, two-stage control senses system pressure (PC and LS controls) and load pressure (LS only). The pump control ports system pressure to the displacement piston to control pump output flow.

Frame H cross section

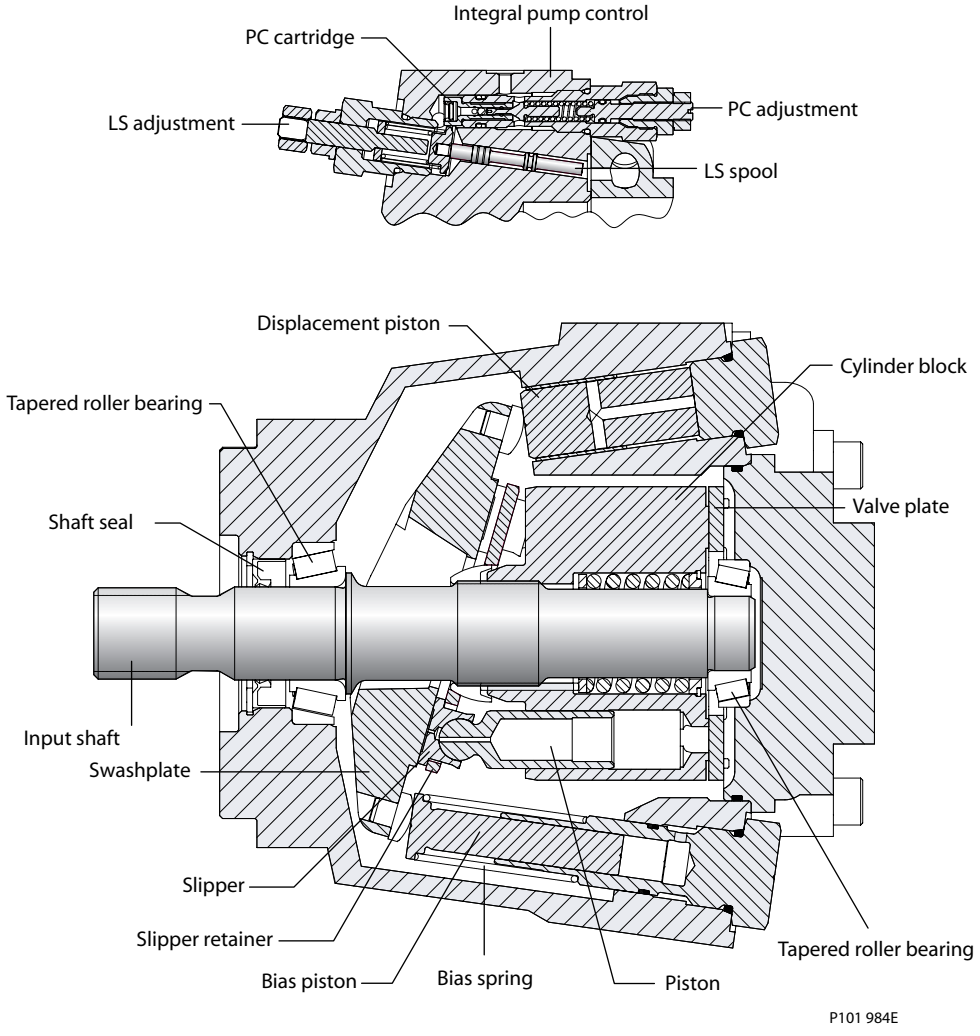

Series 45 Axial Piston Open Circuit Pumps
Technical Information
Frame H

SPECIFICATIONS

For general operating parameters, including fluid viscosity, temperature, and inlet and case pressures, *see page 14*. For system design parameters, including installation, filtration, reservoir, and line velocities, *see page 16*.

Features and options

Feature		Unit	Model H57B	Model H75D
Maximum Displacement		cm³ [in³]	57 [3.48]	75 [4.58]
Flow at rated speed (theoretical)		l/min [US gal/min]	148.2 [39.2]	180 [47.5]
Input torque at maximum displacement (theoretical)		N•m/bar [lbf•in/1000 psi]	0.907 [554]	1.194 [729]
Mass moment of inertia of internal rotating components		kg•m² [slug•ft²]	0.00430 [0.00318]	0.00420 [0.00310]
Weight	Axial ports	kg [lb]	24 [53]	
	Radial ports		27 [60]	
Rotation			Clockwise, Counterclockwise	
Mounting			SAE-B, SAE-C	
Auxiliary mounting (*See page 51*)			SAE-A, SAE-B, SAE-BB, SAE-C	
System ports (type)			SAE O-ring boss, 4-bolt split flange	
System ports (location)			Axial, Radial	
Control types (*See page 46*)			PC, LS, LS with internal bleed	
Shafts (*See page 48*)		Splined	13 tooth, 14 tooth, 15 tooth	
		Tapered	Ø 31.75 mm [1.25 in], 1:8 taper	
		Straight	Ø 31.75 mm [1.25 in]	
Displacement limiters (*See page 52*)			Optional, adjustable	

For definitions of pressure and speed ratings, *see page 15*. For more information on external shaft loads, *see page 17*; mounting flange loads, *see page 18*.

Ratings

Rating		Units	Model H57B	Model H75D
Input speed[1]	minimum	min⁻¹ (rpm)	500	500
	continuous		2600	2400
	maximum		3200	2800
Working pressure	continuous	bar [psi]	310 [4495]	210 [3045]
	maximum		400 [5800]	300 [4350]
External shaft loads	External moment (M_e)	N•m [lbf•in]	226 [2000]	226 [2000]
	Thrust in (T_{in}), out (T_{out})	N [lbf]	2200 [495]	2200 [495]
Bearing life	at 140 bar [2030 psi]	B_{10} hours	29 712	10 755
	at 210 bar [3045 psi]		6834	2474
	at 260 bar [3770 psi]		3151	—
	at 310 bar [4495 psi]		1666	—
Mounting flange load moments	Vibratory (continuous)	N•m [lbf•in]	SAE-C: 1500 [14 000], SAE-B: 735 [6500]	
	Shock (max)		SAE-C: 5650 [50 000], SAE-B: 2600 [23 000]	

1. Input speeds are valid at 1 bar absolute [0 in Hg vac] inlet pressure. See *Inlet pressure vs. speed* charts.

For more information on noise levels, *see page 20*.

Sound levels[2]

dB(A)	210 bar [3045 psi]		260 bar [3770 psi]		310 bar [4495 psi]	
Model	1800 min⁻¹(rpm)	Rated speed	1800 min⁻¹(rpm)	Rated speed	1800 min⁻¹(rpm)	Rated speed
H57B	69	72	70	73	71	74
H75D	71	74	—	—	—	—

2. Sound data was collected in a *semi-anechoic* chamber. Values have been adjusted (-3 dB) to reflect *anechoic* levels.

PERFORMANCE H57B

Flow and power data valid at 49°C [120°F] and viscosity of 17.8 mm²/sec [88 SUS].

Flow vs. speed

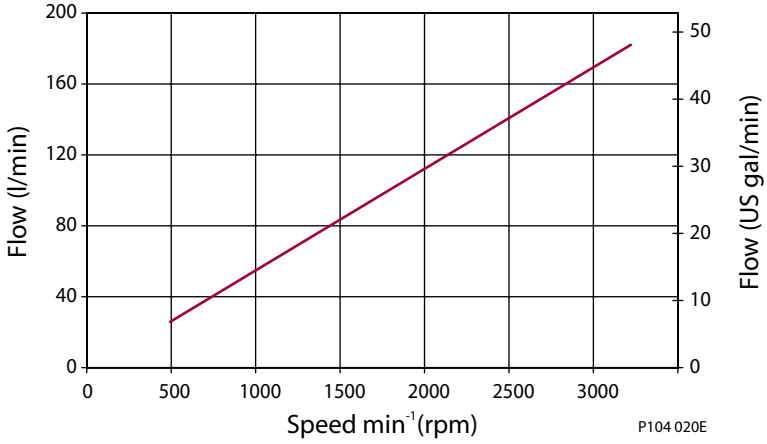

Input power vs. speed

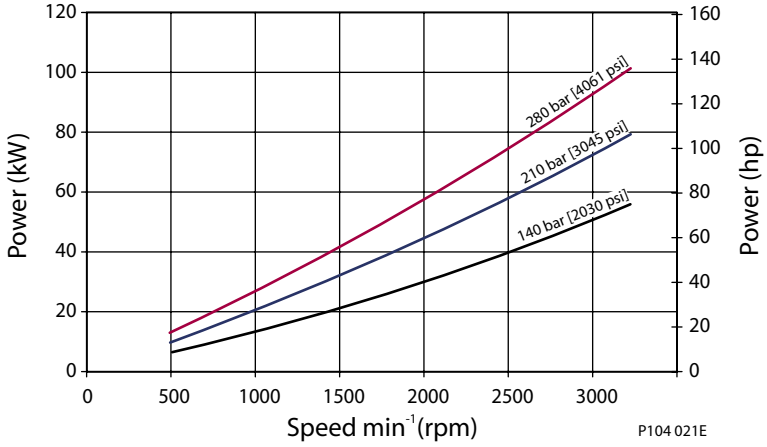

The chart on the right shows allowable inlet pressure and speed at various displacements. Greater speeds and lower inlet pressures are possible at reduced displacement. Operating outside of acceptable limits reduces pump life.

Inlet pressure vs. speed

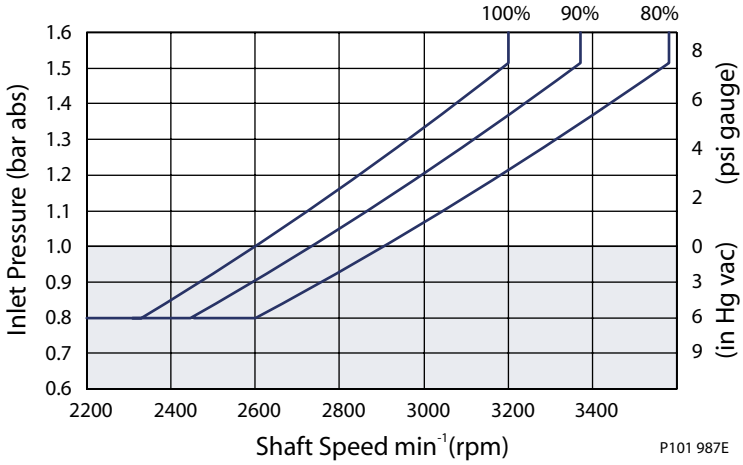

PERFORMANCE H75D

Flow and power data valid at 49°C [120°F] and viscosity of 17.8 mm²/sec [88 SUS].

Flow vs. speed

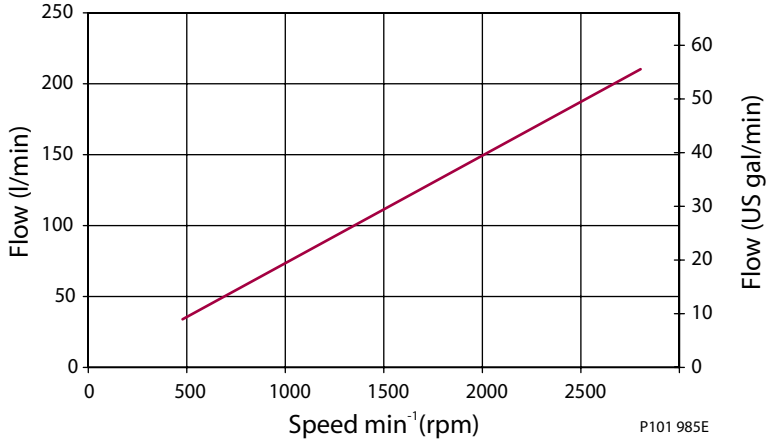

Input power vs. speed

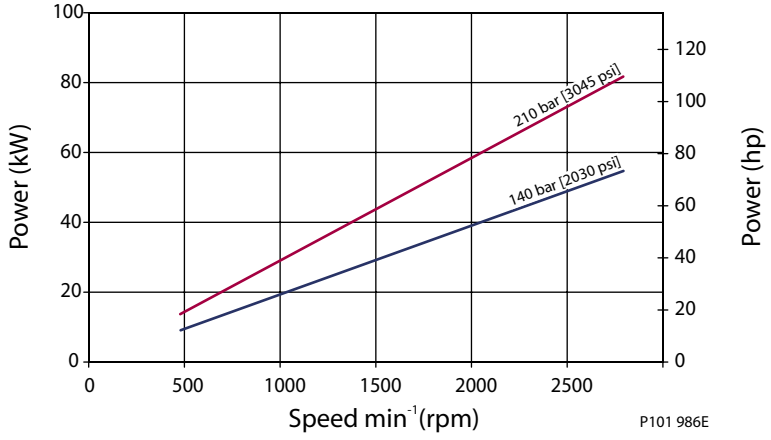

The chart on the right shows allowable inlet pressure and speed at various displacements. Greater speeds and lower inlet pressures are possible at reduced displacement. Operating outside of acceptable limits reduces pump life.

Inlet pressure vs. speed

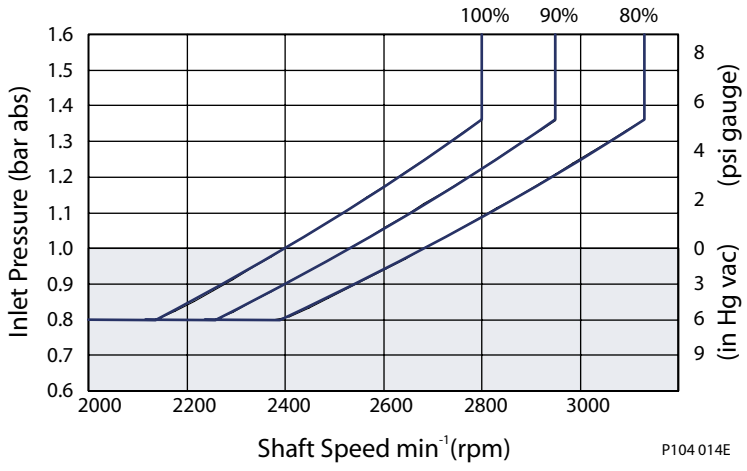

Series 45 Axial Piston Open Circuit Pumps
Technical Information
Frame H

ORDER CODE

R *Product*

HR	H Frame, variable displacement open circuit pump

S *Rotation*

L	Left hand (counterclockwise)
R	Right hand (clockwise)

P *Displacement and pressure rating*

057B	057 cm³/rev [3.48 in³/rev], 310 bar [4495 psi] continuous working pressure
075D	075 cm³/rev [4.58 in³/rev], 210 bar [3045 psi] continuous working pressure

C *Control type*

PC	Pressure compensated control
LS	Load sensing / pressure compensating control
LB	Load sensing / pressure compensating control with internal bleed orifice

D *PC setting (2 digit code, 10 bar increments)*

Example	10 = 100 bar
10–31	100 to 310 bar [1450 to 4495 psi] (057B)
10–21	100 to 210 bar [1450 to 3045 psi] (075D)

E *Load sensing setting (2 digit code, 1 bar increments)*

Example	20 = 20 bar
10–35	10 to 35 bar [145 to 508 psi]
NN	Not applicable (use with PC controls)

F *Not used*

NN	Not applicable

G *Pilot orifice*

N	None (standard for PC control)
A	Ø 0.8 mm [0.031 in] (standard with LS and LB controls)

H *Gain orifice*

3	Standard orifice

Series 45 Axial Piston Open Circuit Pumps
Technical Information
Frame H

ORDER CODE (continued)

J1 *Input shaft*

SAE-C mounting flange pumps (housing code K2=1)	
S1	14 tooth, 12/24 pitch (ANSI B92.1 1970 - Class 5)
T0	Ø 31.75 mm [1.25 in], 1:8 taper
K4	Ø 31.75 mm [1.25 in], straight keyed
C2	13 tooth, 16/32 pitch (ANSI B92.1 1970 - Class 5)
C3	15 tooth, 16/32 pitch (ANSI B92.1 1970 - Class 5)
SAE-B mounting flange pumps (housing code K2=6)	
L4	Ø 31.75 mm [1.25 in], straight keyed
D2	13 tooth, 16/32 pitch (ANSI B92.1 1970 - Class 5)
D3	15 tooth, 16/32 pitch (ANSI B92.1 1970 - Class 5)

J2 *Auxiliary mounting flange*

N	None
A	SAE-A, 9-tooth coupling
T	SAE-A, 11-tooth coupling
B	SAE-B, 13-tooth coupling
V	SAE-BB, 15-tooth coupling
C	SAE-C, 14-tooth coupling

J3 *System port size and location*

Code	Location	Port type	Inlet size	Outlet size
2	Radial	4-bolt split-flange	2 in.	1 in.
4	Axial	4-bolt split-flange	2 in.	1 in.
3	Axial	SAE O-ring boss	1 7/8 in.	1 5/16 in.

K1 *Shaft seal*

A	Single lip seal, viton

K2 *Mounting flange and housing port style*

1	SAE-C 4-bolt, SAE O-ring boss housing ports
6	SAE-B 2-bolt, SAE O-ring boss housing ports

K3 *Not used*

N	Not applicable

L *Displacement limiter*

NNN	None
AAA	Adjustable, factory set at max angle
Axx	Adjustable, factory set at xx% of maximum displacement (5% increments), *Example: A90=90%*

M *Special hardware*

NNN	None

N *Special features*

NNN	None

CONTROLS

Pressure compensated control (PC)

Specifications

PC control setting range

Model	bar	psi
H57B	100–310	1450–4495
H75D	100–210	1450–3045

*Response/recovery times**

(ms)	Response	Recovery
H57B	30	125
H75D	30	130

* For definitions, *see page 11*.

Schematic diagram

PC schematic

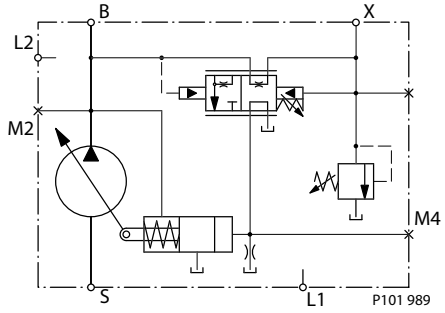

Legend

B = Outlet
S = Inlet
L1, L2 = Case drain
M2 = System pressure gauge port
M4 = Servo pressure gauge port
X = Not used

Load sensing control (LS)

Specifications

PC setting range

Model	bar	psi
H57B	100–310	1450–4495
H75D	100–210	1450–3045

*Response/recovery times**

(ms)	Response	Recovery
H57B	30	90
H75D	30	95

* For definitions, *see page 13*.

Schematic diagram

LS Schematic

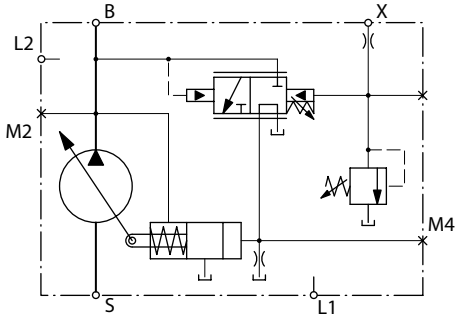

LS setting range

Model	bar	psi
All	10–35	145–508

Legend

B = Outlet
S = Inlet
L1, L2 = Case drain
M2 = System pressure gauge port
M4 = Servo pressure gauge port
X = LS signal port

CONTROLS (continued)

Load sensing control with internal bleed orifice (LB)

Specifications

PC setting range

Model	bar	psi
H57B	100–310	1450–4495
H75D	100–210	1450–3045

*Response/recovery times**

(ms)	Response	Recovery
H57B	30	90
H75D	30	95

* For definitions, *see page 13*.

Schematic diagram

LS Schematic

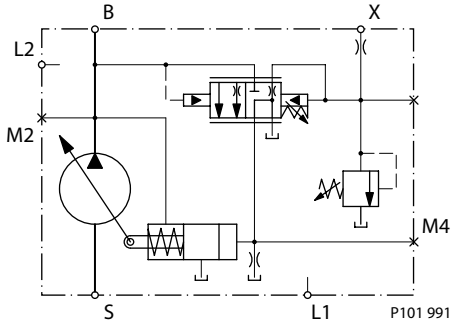

LS setting range

Model	bar	psi
All	10–35	145–508

Legend

B = Outlet
S = Inlet
L1, L2 = Case drain
M2 = System pressure gauge port
M4 = Servo pressure gauge port
X = LS signal port

INPUT SHAFTS

Shaft data

Code	Description	Availability		Torque rating[1]		Drawing
		SAE-C flange	SAE-B flange	Continuous N•m [lbf•in]	Maximum N•m [lbf•in]	
S1	14 tooth spline 12/24 pitch (ANSI B92.1 1970 - Class 5)	●	—	283 [2500]	734 [6495]	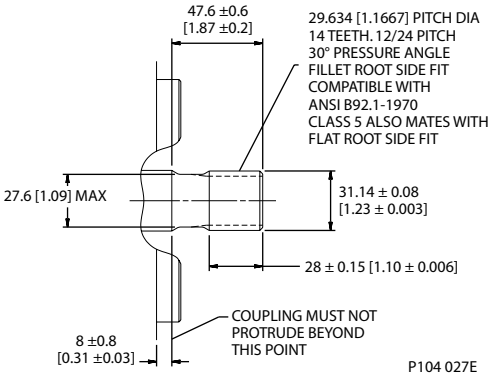
T0	Ø 31.75 mm [1.25 in] 1:8 taper (SAE J501)	●	—	N/A	734 [6495]	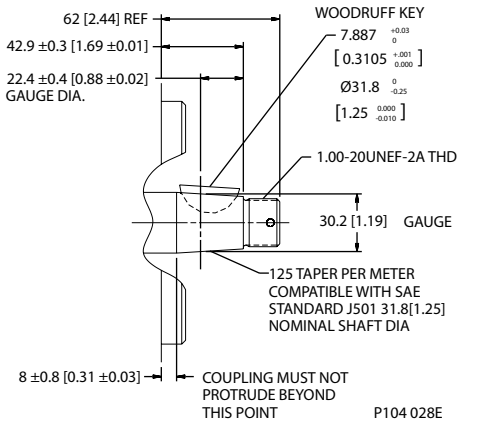
K4	Ø 31.75 mm [1.25 in] Straight keyed	●	—	N/A	655 [5797]	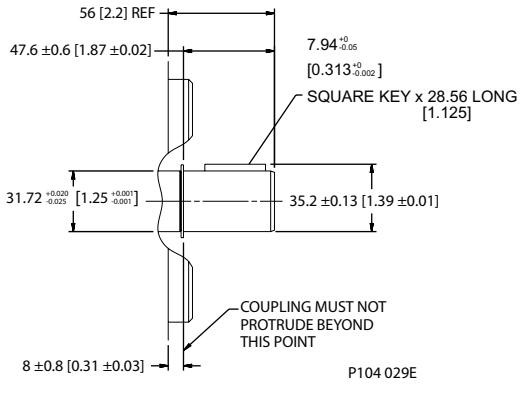

1. See *Input shaft torque ratings*, page 19 for definitions of continuous and maximum torque.

INPUT SHAFTS (continued)

Code	Description	Availability		Torque rating[1]		Drawing
		SAE-C flange	SAE-B flange	Continuous N•m [lbf•in]	Maximum N•m [lbf•in]	
C2	13-tooth 16/32 pitch (ANSI B92.1 1970 - Class 5)	●	—	102 [900]	282 [2495]	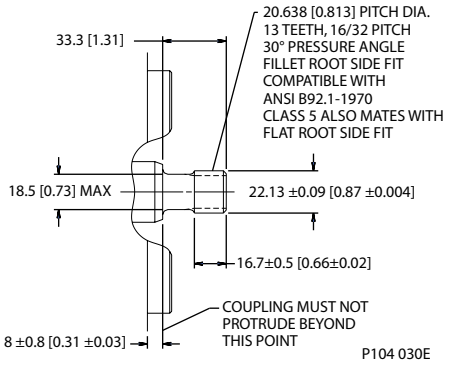
C3	15-tooth 16/32 pitch (ANSI B92.1 1970 - Class 5)	●	—	192 [1700]	362 [3200]	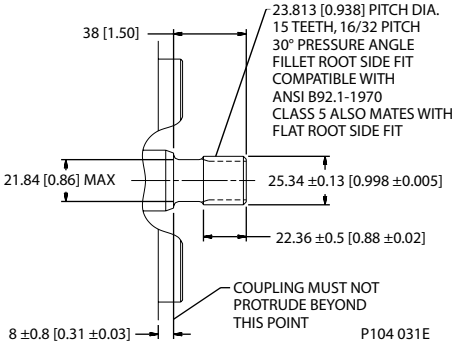
L4	Ø 31.75 mm [1.25 in] Straight keyed	—	●	N/A	655 [5800]	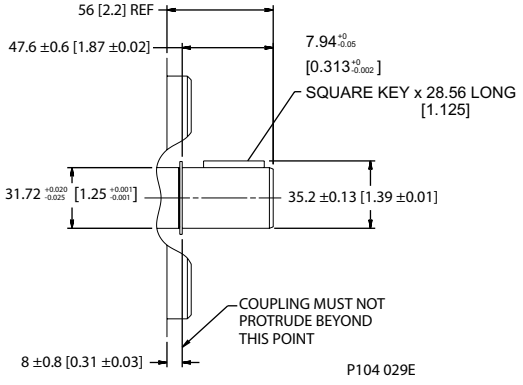

1. See *Input shaft torque ratings*, page 19 for definitions of continuous and maximum torque.

INPUT SHAFTS (continued)

Code	Description	Availability		Torque rating[1]		Drawing
		SAE-C flange	SAE-B flange	Continuous N•m [lbf•in]	Maximum N•m [lbf•in]	
D2	13-tooth 16/32 pitch (ANSI B92.1 1970 - Class 5)	—	●	102 [900]	282 [2495]	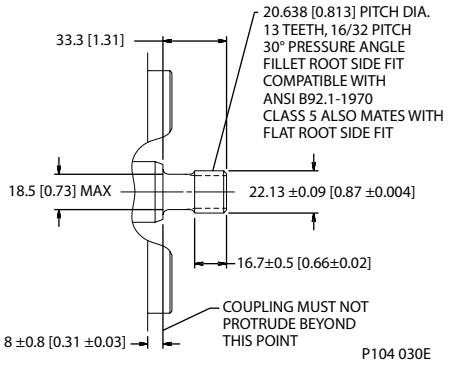
D3	15-tooth 16/32 pitch (ANSI B92.1 1970 - Class 5)	—	●	192 [1700]	362 [3200]	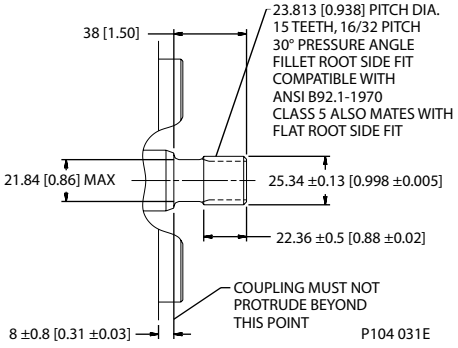

1. See *Input shaft torque ratings*, page 19 for definitions of continuous and maximum torque.

AUXILIARY MOUNTING PADS

See page 19 for mating pump pilot and spline dimensions.

SAE-A auxiliary mounting pad

Dimensions

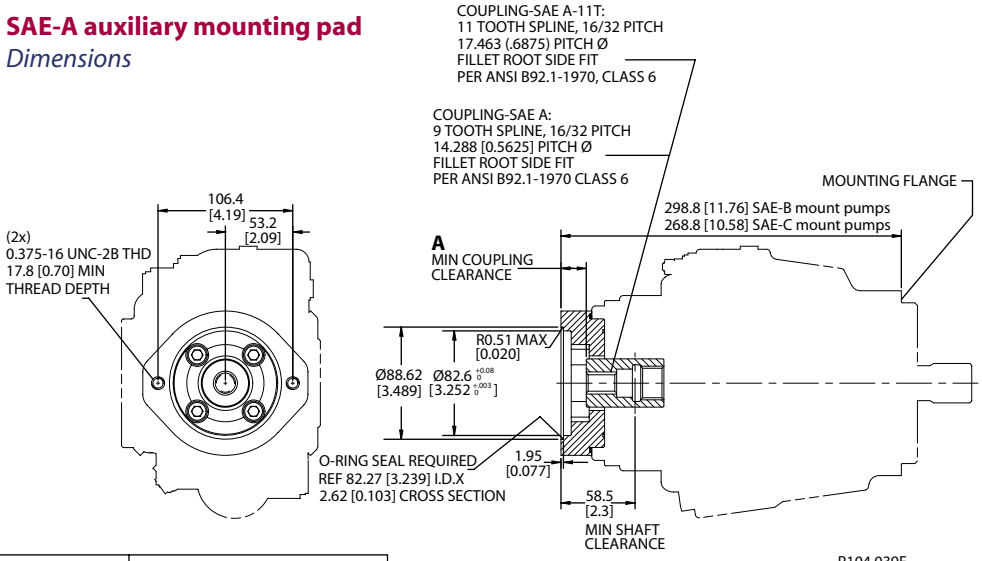

Specifications

Coupling	9-tooth	11-tooth
Spline minimum engagement	13.5 mm [0.53 in]	15 mm [0.59 in]
Continuous torque	51 N•m [450 lbf•in]	90 N•m [800 lbf•in]
Maximum torque	107 N•m [950 lbf•in]	147 N•m [1300 lbf•in]
Dimension A	21.1 mm [0.83 in]	16.1 mm [0.63 in]

See page 19 for mating pump pilot and spline dimensions.

SAE-B auxiliary mounting pad

Dimensions

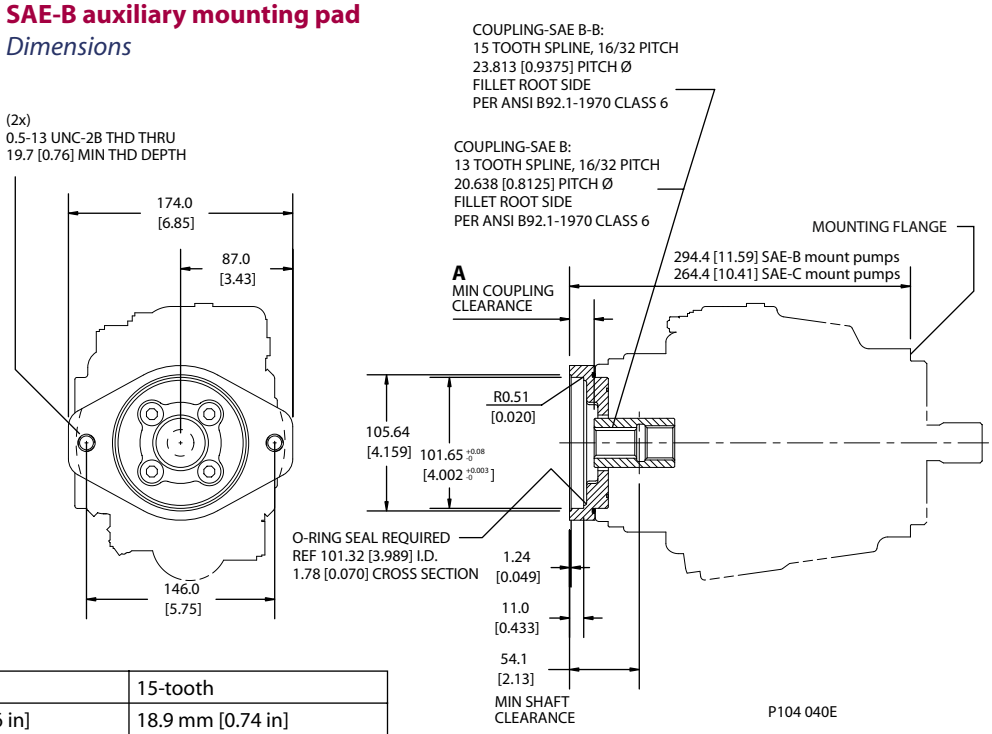

Specifications

Coupling	13-tooth	15-tooth
Spline minimum engagement	14.2 mm [0.56 in]	18.9 mm [0.74 in]
Continuous torque	124 N•m [1100 lbf•in]	235 N•m [2080 lbf•in]
Maximum torque	249 N•m [2200 lbf•in]	339 N•m [3000 lbf•in]
Dimension A	20.7 mm [0.81 in]	12.7 mm [0.5 in]

AUXILIARY MOUNTING PADS (continued)

See page 19 for mating pump pilot and spline dimensions.

SAE-C auxiliary mounting pad

Dimensions

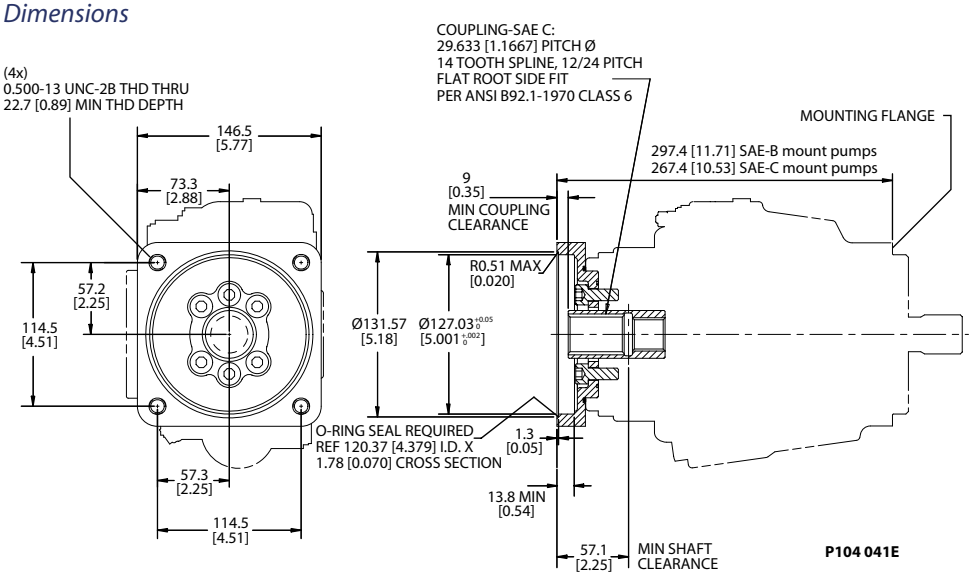

Specifications

Coupling	14-tooth
Spline minimum engagement	18.3 mm [0.72 in]
Continuous torque	235 N•m [2080 lbf•in]
Maximum torque	339 N•m [3000 lbf•in]

DISPLACEMENT LIMITERS

H Frame open circuit pumps are available with an optional adjustable displacement limiter. This adjustable stop limits the pump's maximum displacement.

Displacement limiter cross-section

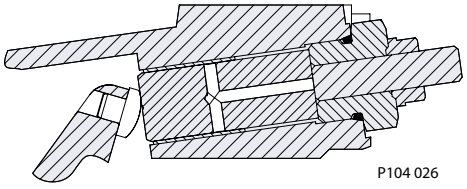

Setting range

H57B	43 to 57 cm³ [2.61 to 3.48 in³]
H75D	56 to 75 cm³ [3.43 to 4.58 in³]

INSTALLATION DRAWINGS

Adjustable displacement limiter

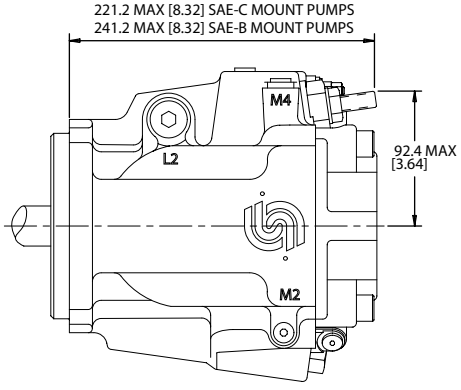

Axial ported units

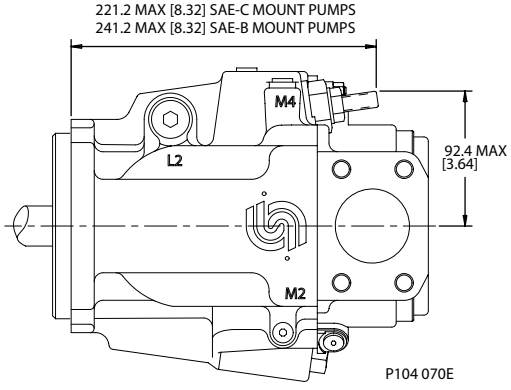

Radial ported units

INSTALLATION DRAWINGS (continued)

SAE-C mounting flange, axial ported endcap



Counterclockwise rotation

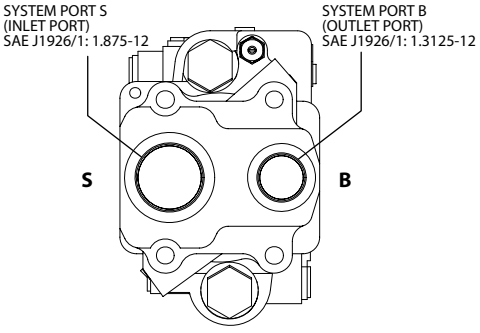

Clockwise rotation

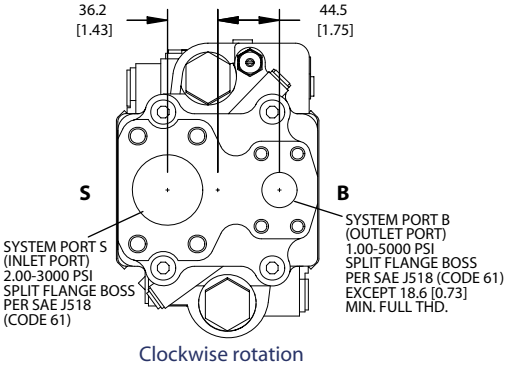

Clockwise rotation



Counterclockwise rotation

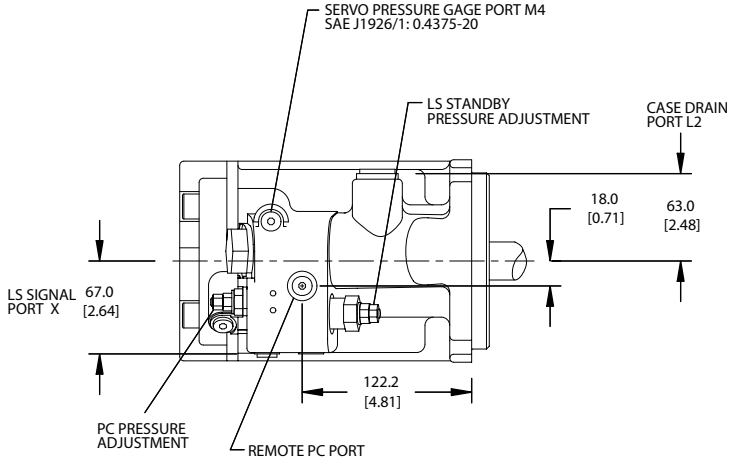

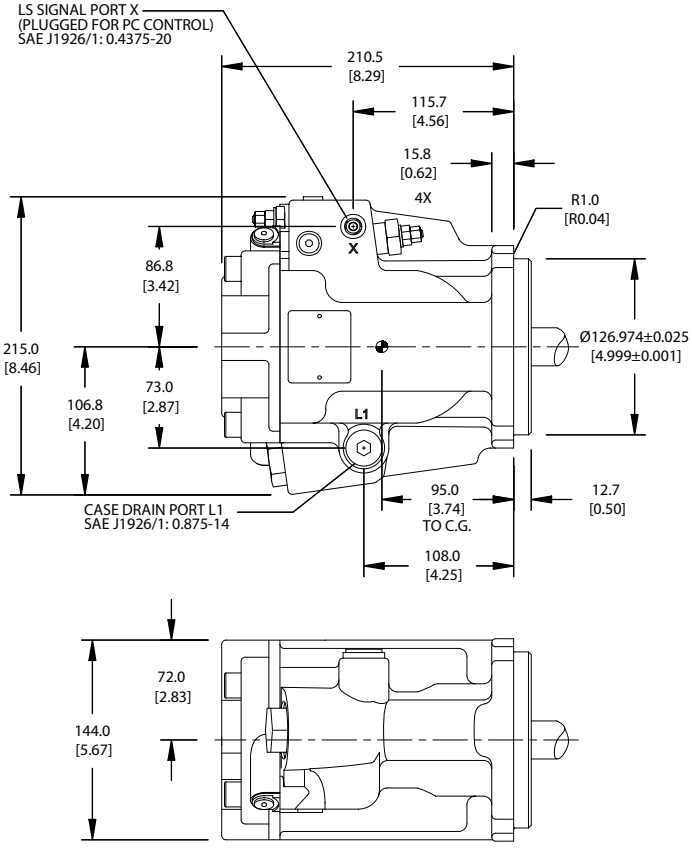

P104 061E

Third-angle projection
mm [in]

INSTALLATION DRAWINGS (continued)

SAE-C mounting flange, axial ported endcap (continued)

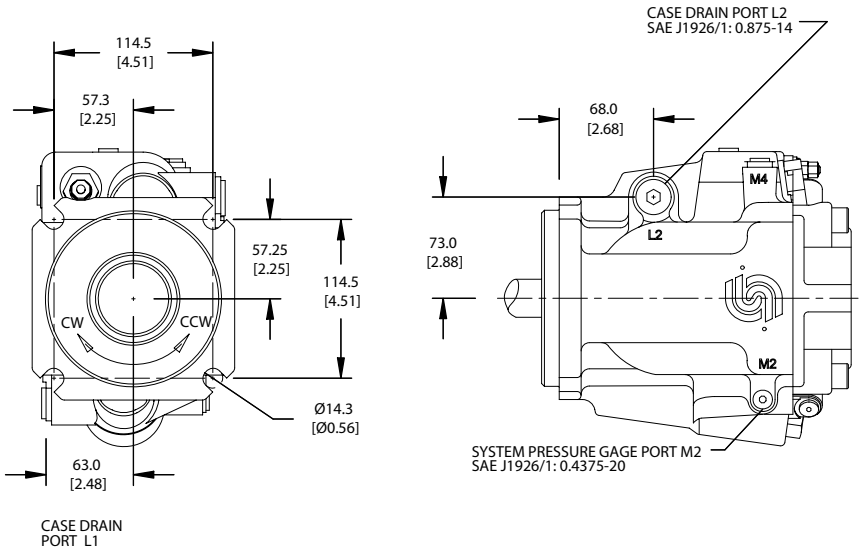

P104 061E

Third-angle projection mm [in]

INSTALLATION DRAWINGS (continued)

SAE-C mounting flange, radial ported endcap

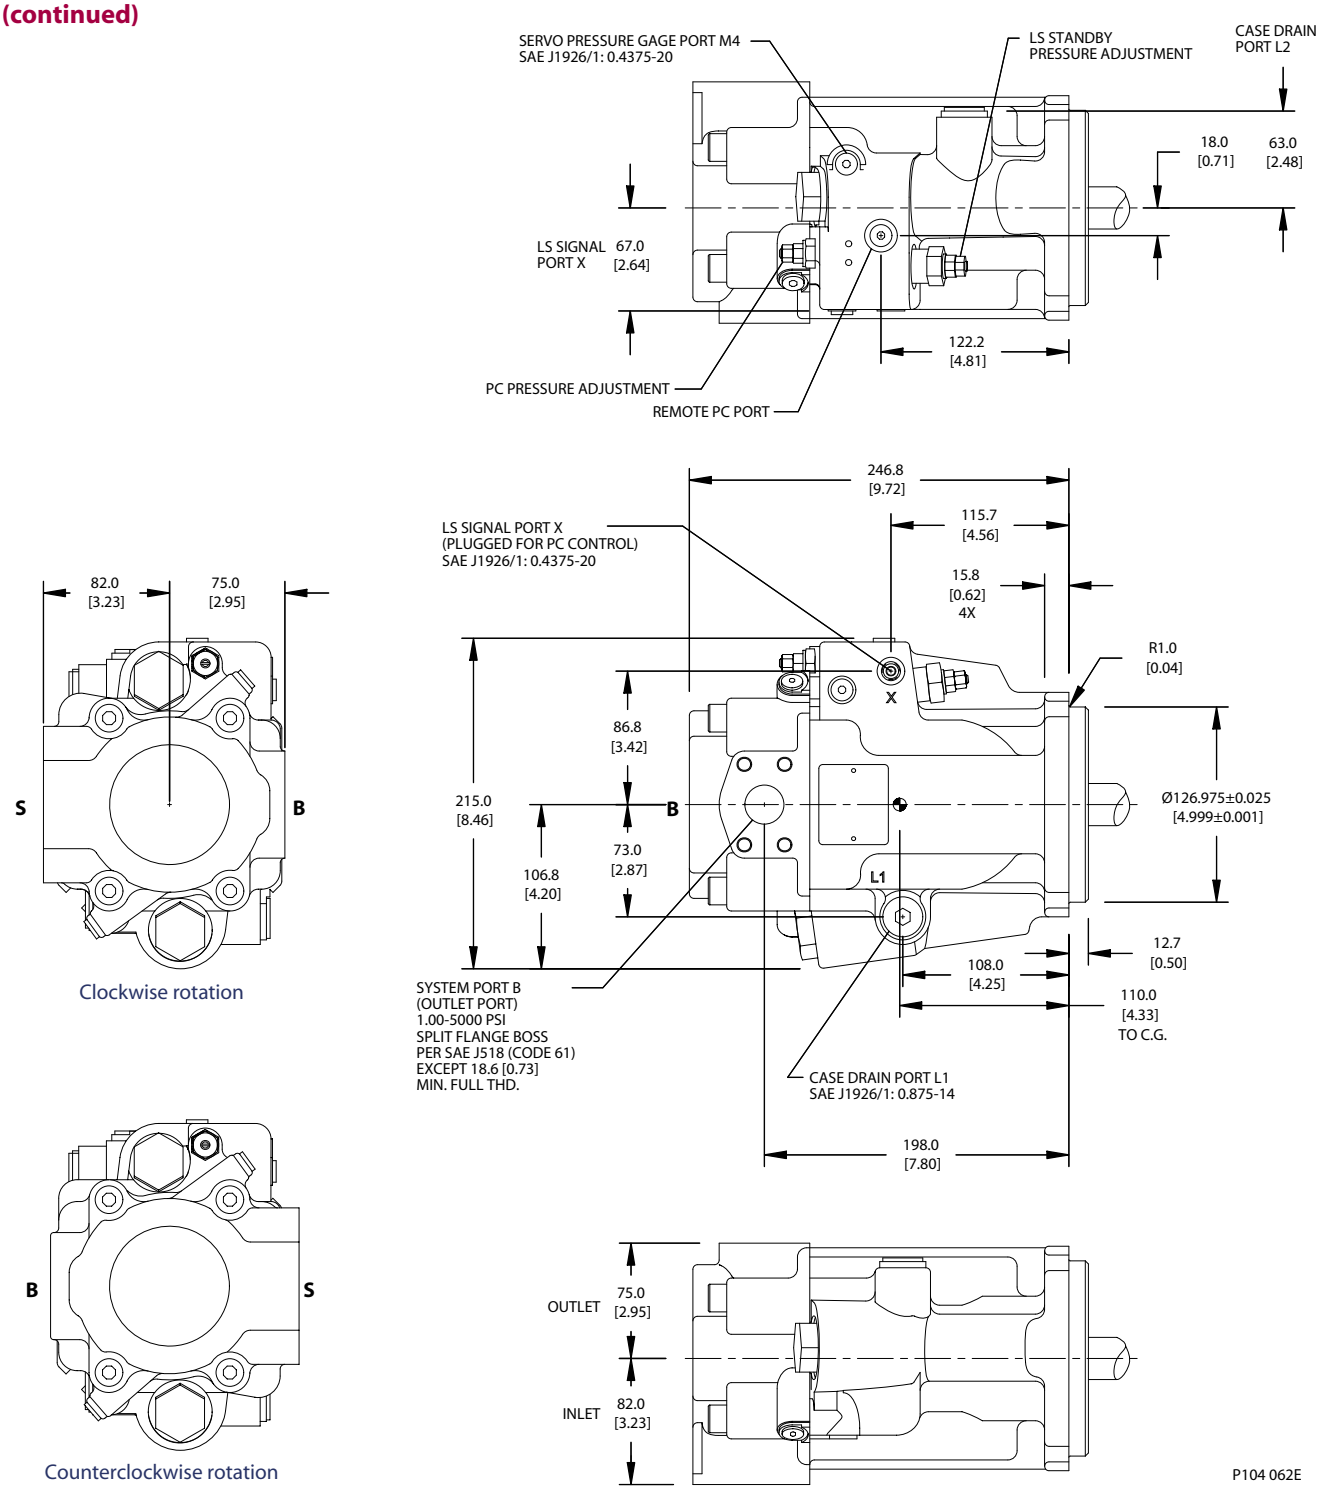

Third-angle projection mm [in]

INSTALLATION DRAWINGS (continued)

SAE-C mounting flange, radial ported endcap (continued)

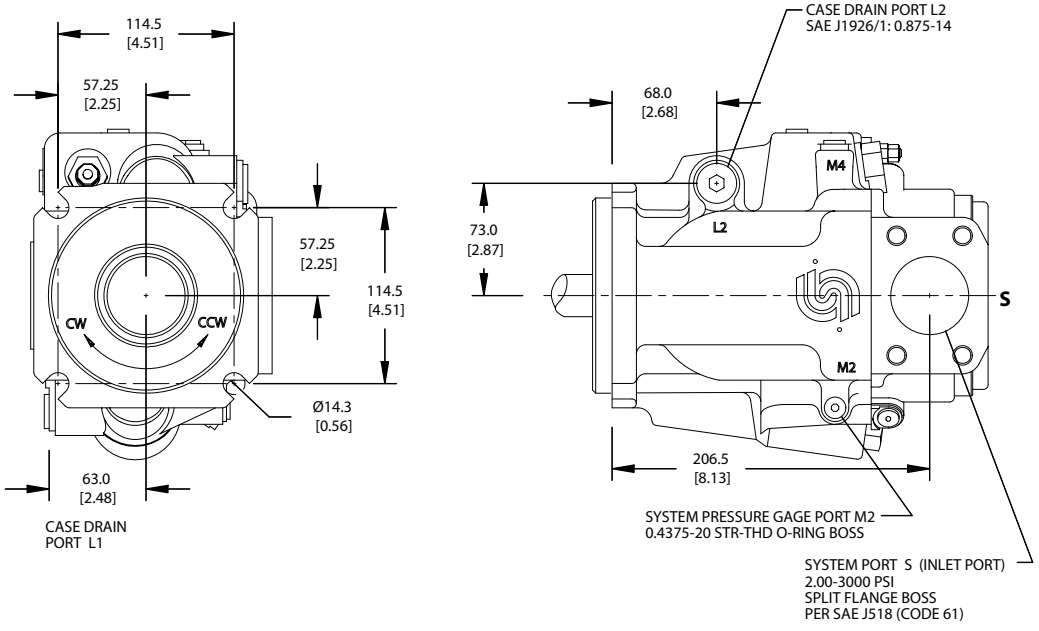

P104 062E

Third-angle projection
mm [in]

INSTALLATION DRAWINGS (continued)

SAE-B mounting flange, axial ported endcap



Counterclockwise rotation

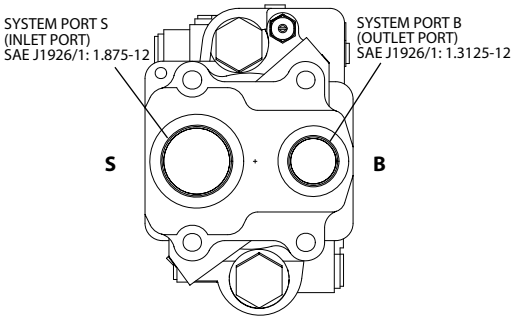

Clockwise rotation

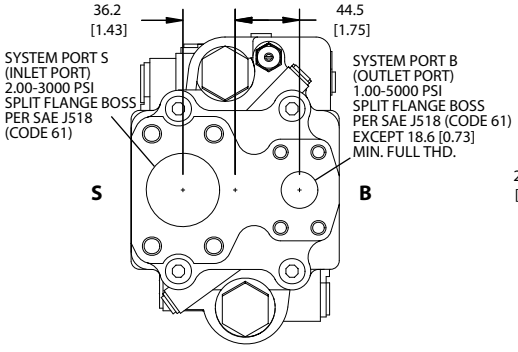

Clockwise rotation



Counterclockwise rotation

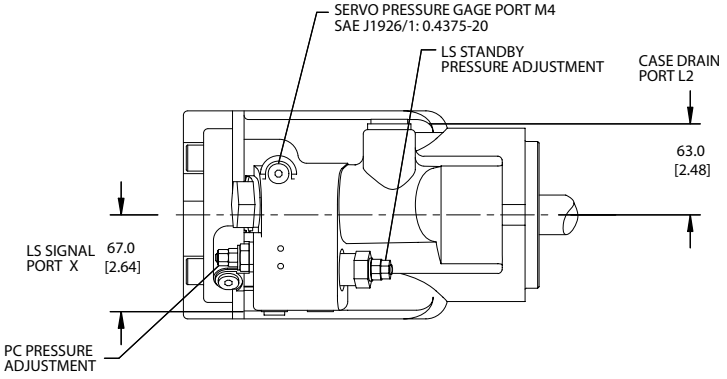

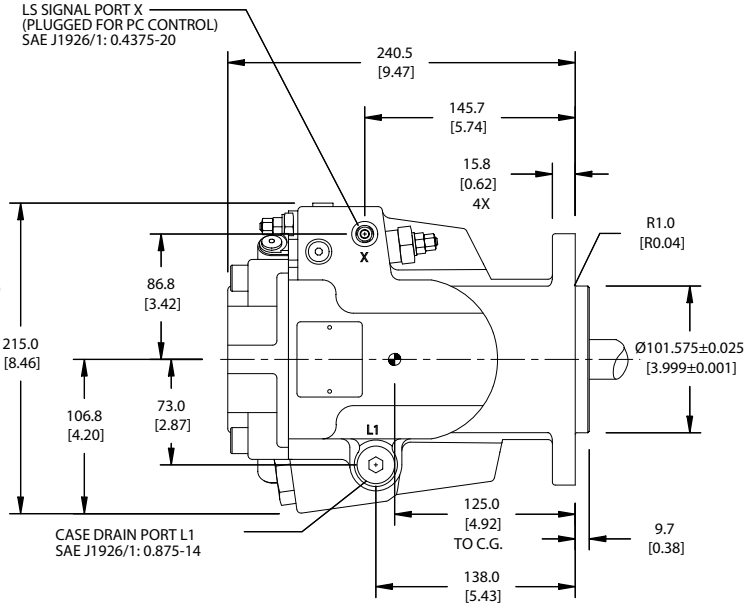

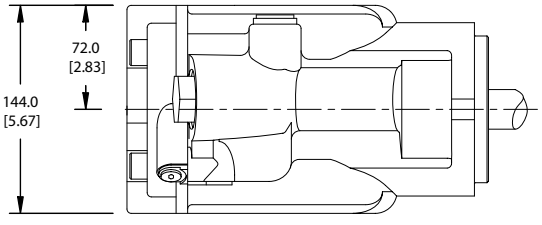

P104 063E

Third-angle projection
mm [in]

INSTALLATION DRAWINGS (continued)

SAE-B mounting flange, axial ported endcap (continued)

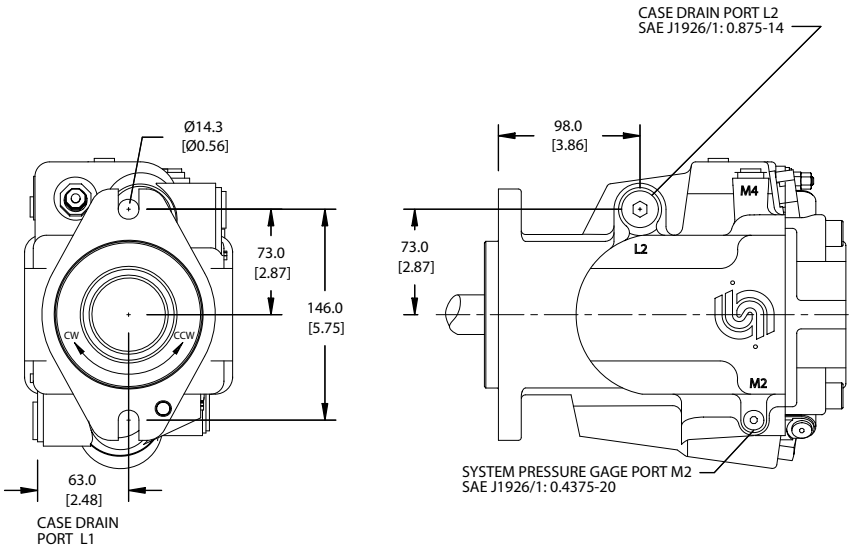

P104 063E

Third-angle projection mm [in]

INSTALLATION DRAWINGS (continued)

SAE-B mounting flange, radial ported endcap

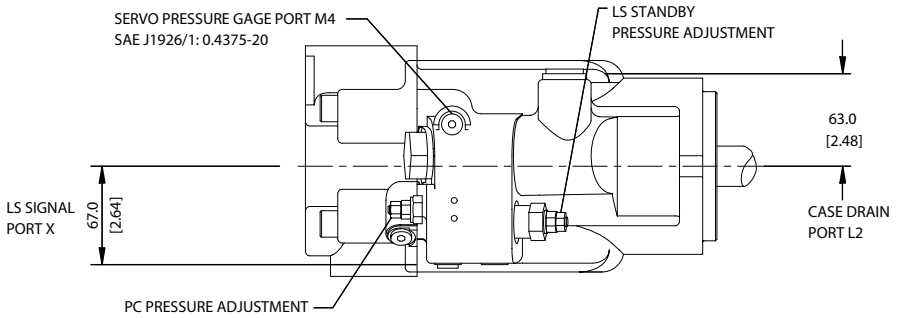

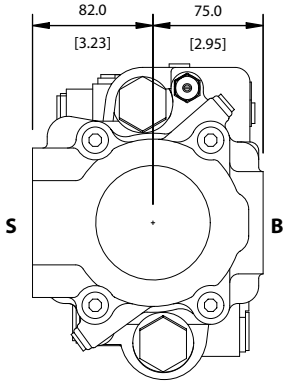

Clockwise rotation

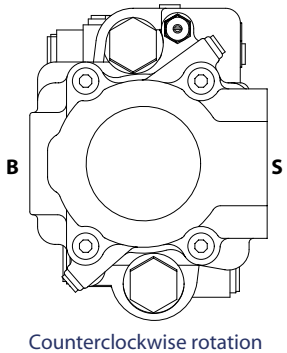

Counterclockwise rotation

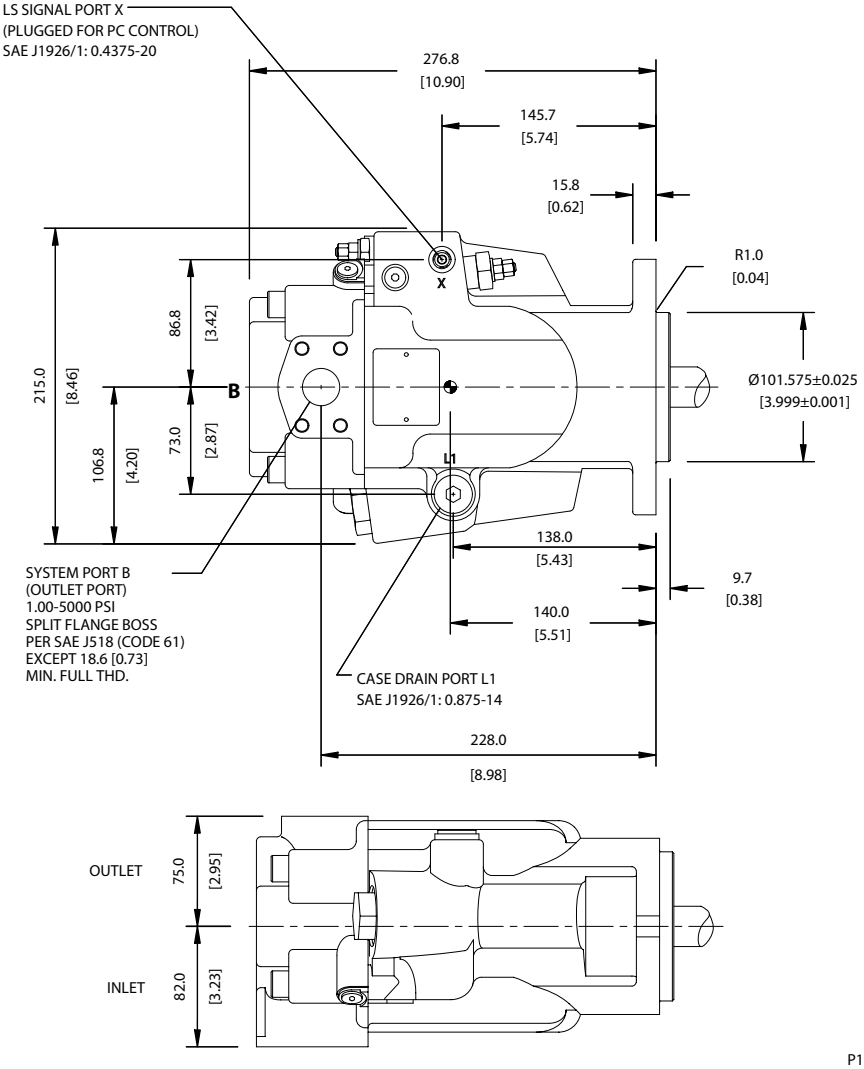

P104 069E

Third-angle projection mm [in]

INSTALLATION DRAWINGS (continued)

SAE-B mounting flange, radial ported endcap (continued)

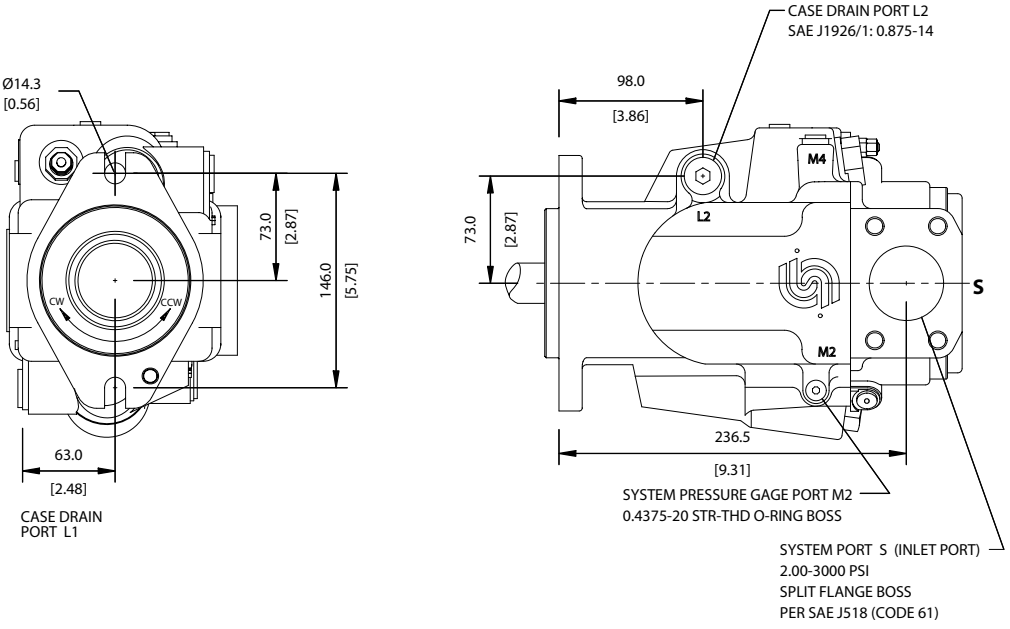

P104 069E

Third-angle projection mm [in]

DESIGN

Series 45 Frame G pumps have a dual servo piston design with a cradle-type swashplate set in polymer-coated journal bearings. The bias piston increases swashplate angle. The displacement piston decreases swashplate angle. At equal pressure, the larger diameter displacement piston overpowers the bias piston. Nine reciprocating pistons displace fluid from the pump inlet to the pump outlet as the cylinder block rotates on the pump input shaft. The block spring holds the piston slippers to the swashplate via the slipper retainer. The cylinder block rides on a bi-metal valve plate optimized for high volumetric efficiency and low noise. Tapered roller bearings support the input shaft and a viton lip-seal protects against shaft leaks.

An adjustable one spool (PC only, not shown) or two spool (LS) control senses system pressure and load pressure (LS controls). The control ports system pressure to the displacement piston to control pump output flow.

Frame H cross section

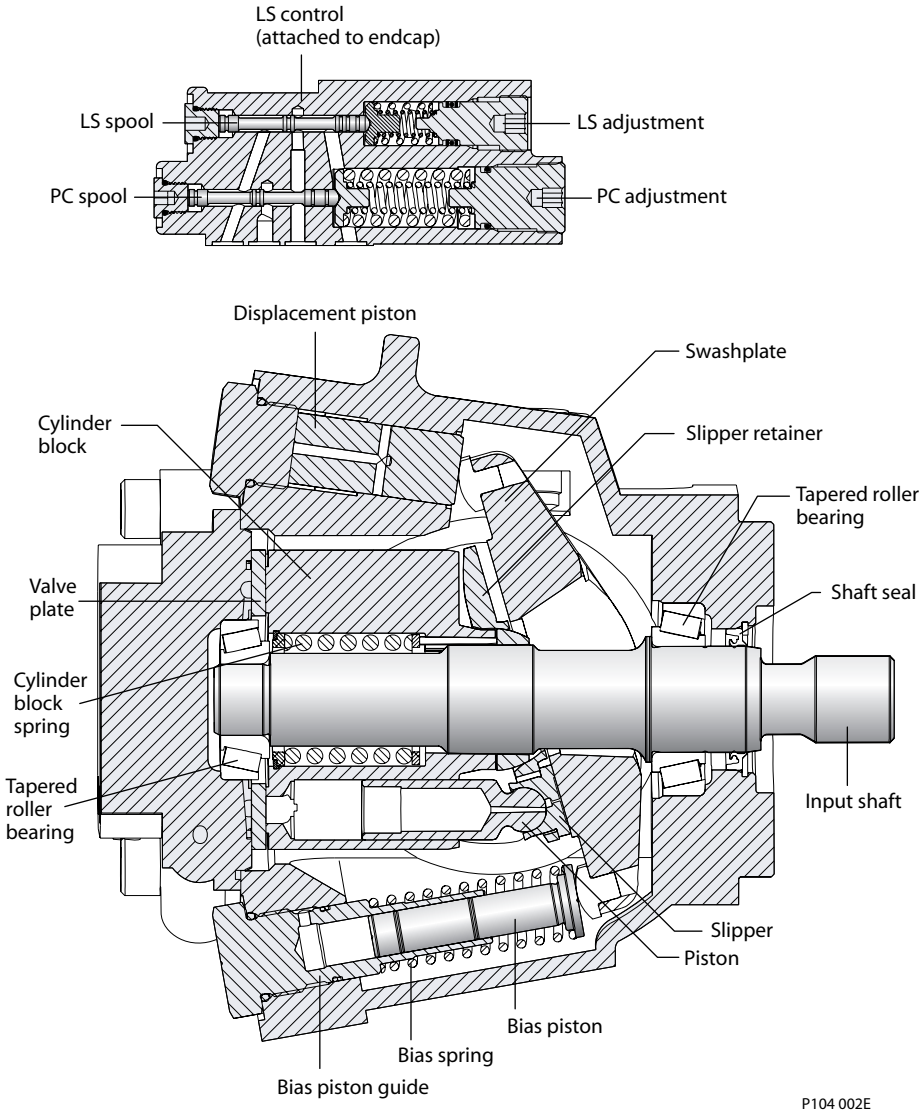

Series 45 Axial Piston Open Circuit Pumps
Technical Information
Frame G

SPECIFICATIONS

For general operating parameters, including fluid viscosity, temperature, and inlet and case pressures, *see page 14*. For system design parameters, including installation, filtration, reservoir, and line velocities, *see page 16*.

Features and options

Feature		Unit	Model G74B	Model G90C
Maximum Displacement		cm³ [in³]	74 [4.52]	90 [5.49]
Flow at rated speed (theoretical)		l/min [US gal/min]	177.6 [46.9]	198 [52.3]
Input torque at maximum displacement (theoretical)		N•m/bar [lbf•in/1000 psi]	1.178 [719]	1.432 [874]
Mass moment of inertia of internal rotating components		kg•m² [slug•ft²]	0.00630 [0.00465]	0.00650 [0.00480]
Weight	Axial ports	kg [lb]	29 [63]	
	Radial ports		36 [80]	
Rotation			Clockwise, Counterclockwise	
Mounting			SAE-C	
Auxiliary mounting (*See page 71*)			SAE-A, SAE-B, SAE-BB, SAE-C	
System ports (type)			4-bolt split flange	
System ports (location)			Axial, Radial	
Control types (*See page 68*)			PC, Remote PC, LS, LS with internal bleed	
Shafts (*See page 70*)		Splined	14 tooth, 17 tooth	
		Straight	Ø 31.75 mm [1.25 in]	
Displacement limiters (*See page 72*)			Optional, adjustable	

For definitions of pressure and speed ratings, *see page 15*. For more information on external shaft loads, *see page 17*; mounting flange loads, *see page 18*.

Ratings

Rating		Units	Model G74B	Model G90C
Input speed[1]	minimum	min⁻¹ (rpm)	500	500
	continuous		2400	2200
	maximum		2800	2600
Working pressure	continuous	bar [psi]	310 [4495]	260 [3770]
	maximum		400 [5800]	350 [5075]
External shaft loads	External moment (M_e)	N•m [lbf•in]	300 [2655]	
	Thrust in (T_{in}), out (T_{out})	N [lbf]	2900 [650]	
Bearing life	at 140 bar [2030 psi]	B_{10} hours	41 383	19 847
	at 210 bar [3045 psi]		9048	4339
	at 260 bar [3770 psi]		4062	1948
	at 310 bar [4495 psi]		2101	—
Mounting flange load moments	Vibratory (continuous)	N•m [lbf•in]	1580 [14 000]	
	Shock (max)		5650 [50 000]	

1. Input speeds are valid at 1 bar absolute [0 in Hg vac] inlet pressure. See *Inlet pressure vs. speed* charts.

For more information on noise levels, *see page 20*.

Sound levels[2]

dB(A)	210 bar [3045 psi]		260 bar [3770 psi]		310 bar [4495 psi]	
Model	1800 min⁻¹(rpm)	Rated speed	1800 min⁻¹(rpm)	Rated speed	1800 min⁻¹(rpm)	Rated speed
G74B	75	78	74	76	75	77
C90C	74	76	75	77	—	—

2. Sound data was collected in a *semi-anechoic* chamber. Values have been adjusted (-3 dB) to reflect *anechoic* levels.

PERFORMANCE G74B

Flow and power data valid at 49°C [120°F] and viscosity of 17.8 mm²/sec [88 SUS].

Flow vs. speed

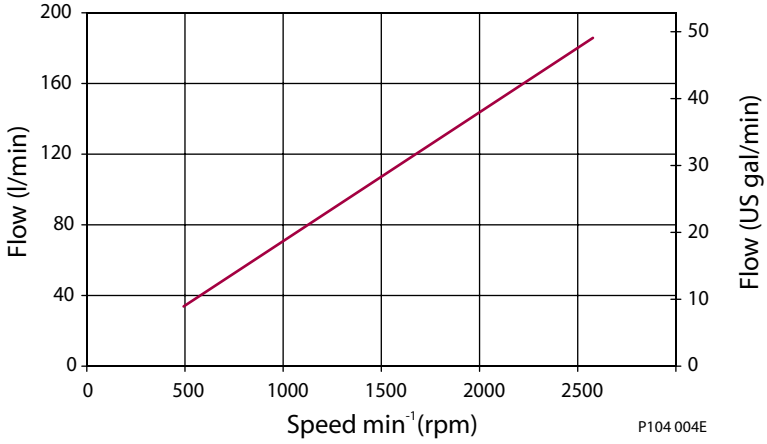

Input power vs. speed

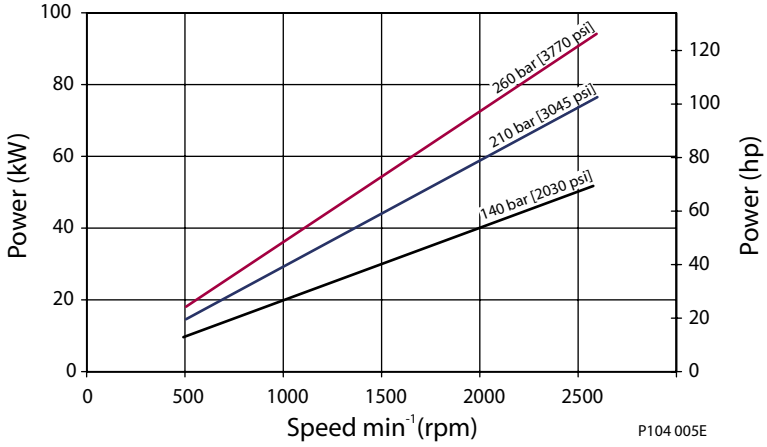

The chart on the right shows allowable inlet pressure and speed at various displacements. Greater speeds and lower inlet pressures are possible at reduced displacement. Operating outside of acceptable limits reduces pump life.

Inlet pressure vs. speed

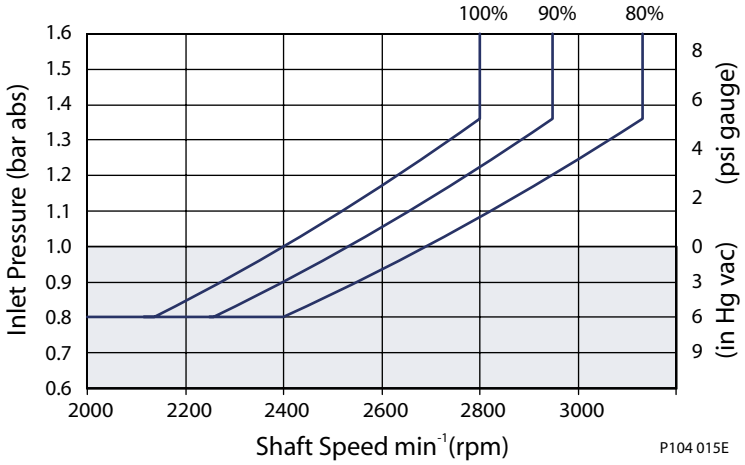

PERFORMANCE G90C

Flow and power data valid at 49°C [120°F] and viscosity of 17.8 mm²/sec [88 SUS].

Flow vs. speed

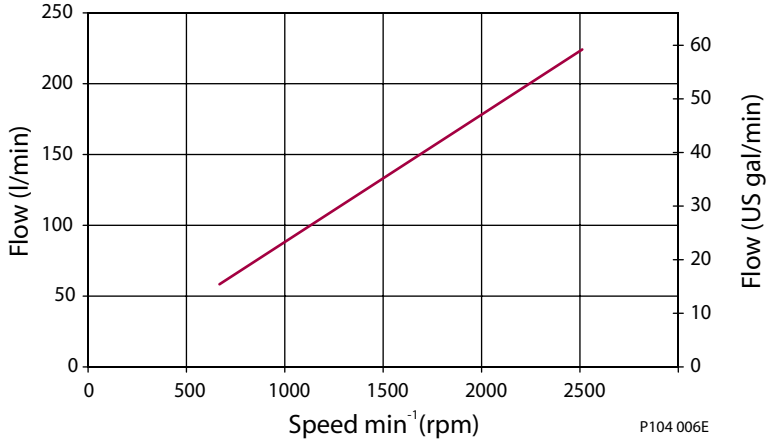

Input power vs. speed

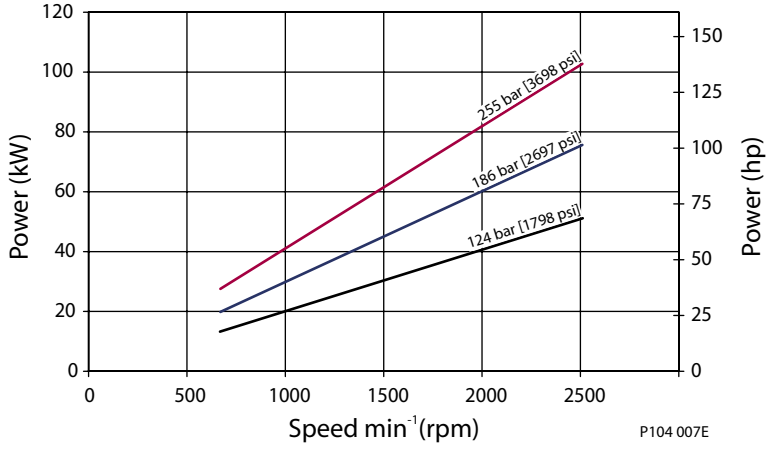

The chart on the right shows allowable inlet pressure and speed at various displacements. Greater speeds and lower inlet pressures are possible at reduced displacement. Operating outside of acceptable limits reduces pump life.

Inlet pressure vs. speed

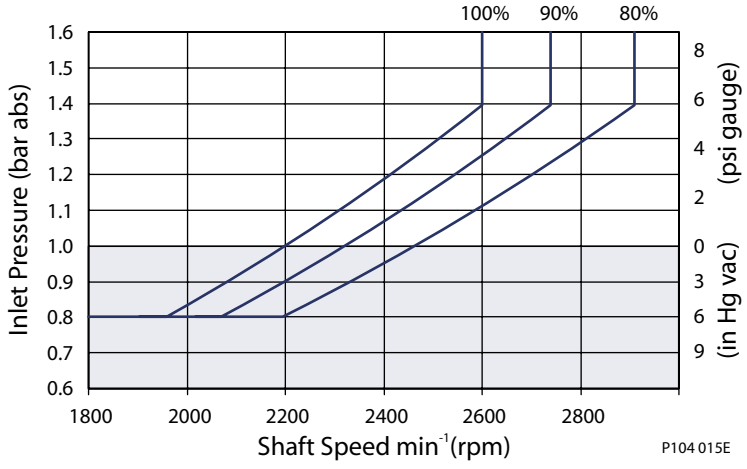

Series 45 Axial Piston Open Circuit Pumps
Technical Information
Frame G

ORDER CODE

R *Product*

GR	G Frame, variable displacement open circuit pump

S *Rotation*

L	Left hand (counterclockwise)
R	Right hand (clockwise)

P *Displacement and pressure rating*

074B	074 cm³/rev [4.52 in³/rev], 310 bar [4495 psi] continuous working pressure
090C	090 cm³/rev [5.49 in³/rev], 260 bar [3770 psi] continuous working pressure

C *Control type*

PC	Pressure compensated control
RP	Remote pressure compensated control
LS	Load sensing / pressure compensating control
LB	Load sensing / pressure compensating control with internal bleed orifice

D *PC setting (2 digit code, 10 bar increments)*

Example	10 = 100 bar
10–31	100 to 310 bar [1450 to 4495 psi] (074B)
10–26	100 to 260 bar [1450 to 3770 psi] (090C)

E *Load sensing setting (2 digit code, 1 bar increments)*

Example	20 = 20 bar
10–30	10 to 40 bar [145 to 435 psi]
NN	Not applicable (use with PC controls)

F *Not used*

NN	Not applicable

G *Pilot orifice*

N	Standard

H *Gain orifice*

3	Standard

Series 45 Axial Piston Open Circuit Pumps
Technical Information
Frame G

ORDER CODE (continued)

J1 *Input shaft*

S1	14 tooth, 12/24 pitch (ANSI B92.1 1970 - Class 5)
S2	17 tooth, 12/24 pitch (ANSI B92.1 1970 - Class 5)
K4	Ø 31.75 mm [1.25 in], straight keyed

J2 *Auxiliary mounting flange*

N	None
A	SAE-A, 9-tooth coupling
T	SAE-A, 11-tooth coupling
B	SAE-B, 13-tooth coupling
V	SAE-BB, 15-tooth coupling
C	SAE-C, 14-tooth coupling

J3 *System port size and location*

Code	Location	Port type	Inlet size	Outlet size
2	Radial	4-bolt split-flange	2 in.	1 in.
4	Axial	4-bolt split-flange	2 in.	1 in.

K1 *Shaft seal*

A	Single lip seal, viton

K2 *Mounting flange and housing port style*

1	SAE-C 4-bolt, SAE O-ring boss housing ports

K3 *Not used*

N	Not applicable

L *Displacement limiter*

NNN	None
AAA	Adjustable, factory set at max angle (074B)
CAA	Adjustable, factory set at max angle (090C)
Axx	Adjustable, factory set at xx% of max. displacement (5% increments), *Example: A90=90%,* (074B)
Cxx	Adjustable, factory set at xx% of max. displacement (5% increments), *Example: A90=90%,* (090C)

M *Special hardware*

NNN	None

N *Special features*

NNN	None

CONTROLS

Pressure compensated control (PC)

Specifications

PC control setting range

Model	bar	psi
G74B	100–310	1450–4495
G90C	100–260	1450–3770

*Response/recovery times**

(ms)	Response	Recovery
G74B	35	130
G90C	40	140

* For definitions, *see page 11*.

Schematic diagram

PC schematic

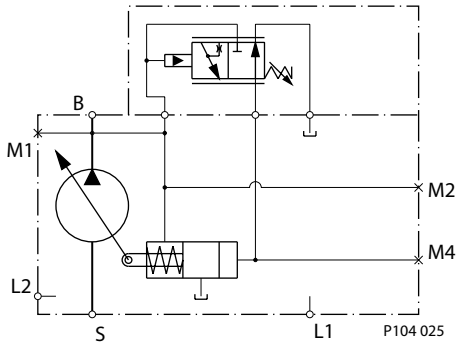

Legend

B = Outlet
S = Inlet
L1, L2 = Case drain
M2 = System pressure gauge port
M4 = Servo pressure gauge port

Remote PC Control (RP)

Specifications

PC control setting range

Model	bar	psi
G74B	100–310	1450–4495
G90C	100–260	1450–3770

*Response/recovery time*s*

(ms)	Response	Recovery
G74B	35	130
G90C	40	140

* For definitions, *see page 12*.

Schematic diagram

Remote PC schematic

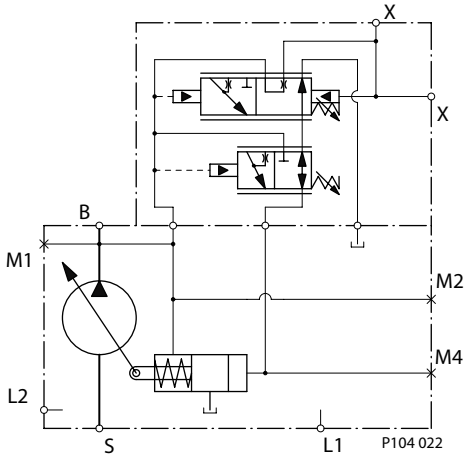

Legend

B = Outlet
S = Inlet
L1, L2 = Case drain
M2 = System pressure gauge port
M4 = Servo pressure gauge port
X = Remote PC port

CONTROLS (continued)

Load sensing control (LS)

Specifications

PC setting range

Model	bar	psi
G74B	100–310	1450–4495
G90C	100–260	1450–3770

*Response/recovery times**

(ms)	Response	Recovery
G74B	35	100
G90C	40	130

* For definitions, *see page 13*.

Schematic diagram

LS Schematic

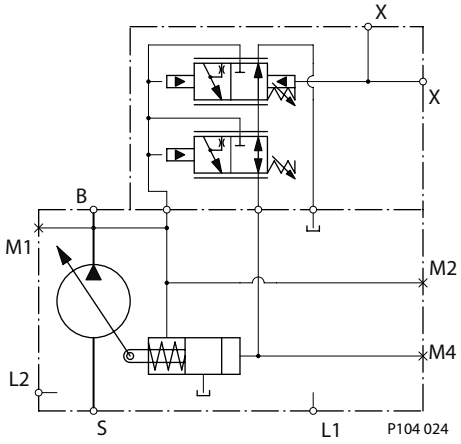

LS setting range

Model	bar	psi
All	10–30	145–435

Legend

B = Outlet
S = Inlet
L1, L2 = Case drain
M2 = System pressure gauge port
M4 = Servo pressure gauge port
X = LS signal port

Load sensing control with internal bleed orifice (LB)

Specifications

PC setting range

Model	bar	psi
G74B	100–310	1450–4495
G90C	100–260	1450–3770

*Response/recovery times**

(ms)	Response	Recovery
G74B	35	100
G90C	40	130

* For definitions, *see page 13*.

Schematic diagram

LB Schematic

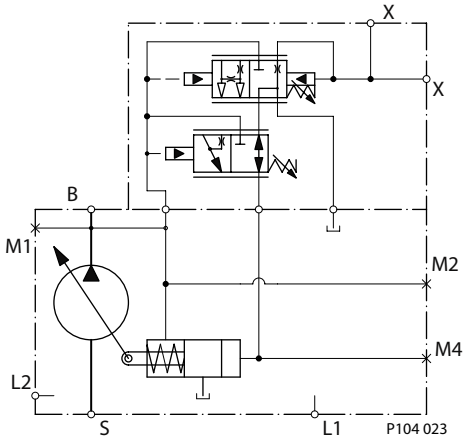

LS setting range

Model	bar	psi
All	10–30	145–435

Legend

B = Outlet
S = Inlet
L1, L2 = Case drain
M2 = System pressure gauge port
M4 = Servo pressure gauge port
X = LS signal port

INPUT SHAFTS

Shaft data

Code	Description	Torque rating[1] Continuous N•m [lbf•in]	Torque rating[1] Maximum N•m [lbf•in]	Drawing
S1	14 tooth spline 12/24 pitch (ANSI B92.1 1970 - Class 5)	282 [2500]	734 [6500]	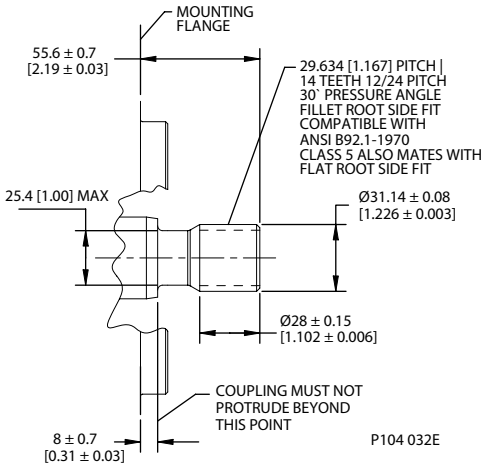
S2	17 tooth spline 12/24 pitch (ANSI B92.1 1970 - Class 5)	497 [4400]	1017 [9000]	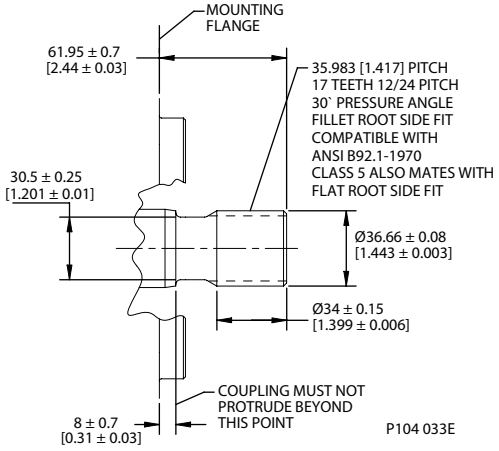
K4	Ø 31.75 mm [1.25 in] Straight keyed	N/A	734 [6495]	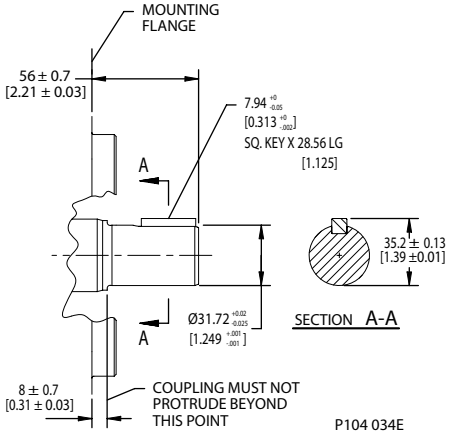

1. See *Input shaft torque ratings*, page 19 for definitions of continuous and maximum torque.

AUXILIARY MOUNTING PADS

See page 19 for mating pump pilot and spline dimensions.

SAE-A auxiliary mounting pad

Dimensions

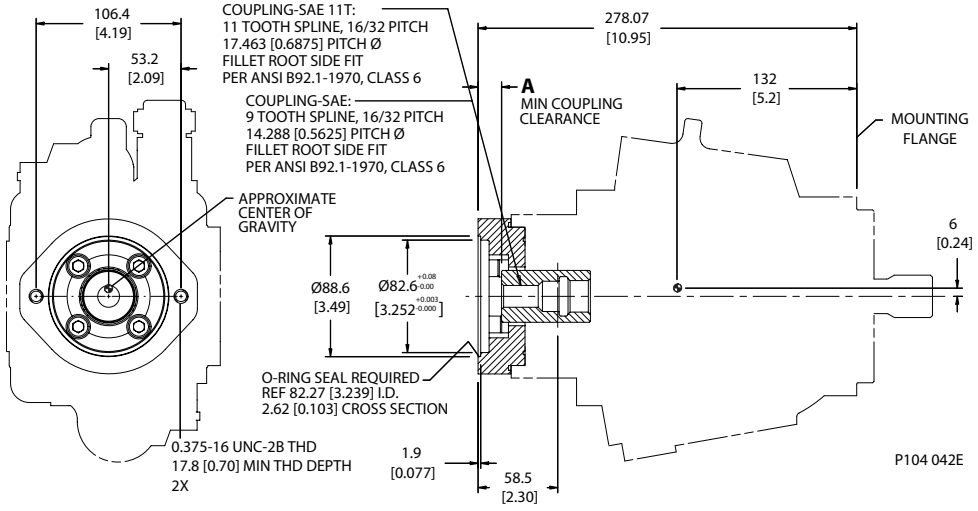

Specifications

Coupling	9-tooth	11-tooth
Spline minimum engagement	13.5 mm [0.53 in]	15 mm [0.59 in]
Continuous torque	51 N•m [450 lbf•in]	90 N•m [800 lbf•in]
Maximum torque	107 N•m [950 lbf•in]	147 N•m [1300 lbf•in]
Dimension A	21.1 mm [0.83 in]	16.1 mm [0.63 in]

SAE-B auxiliary mounting pad

Dimensions

See page 19 for mating pump pilot and spline dimensions.

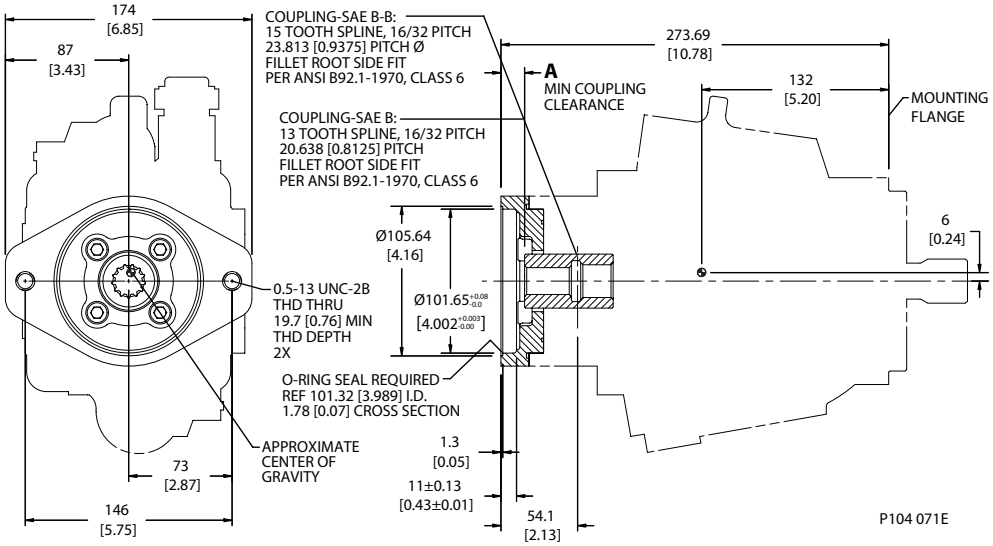

Specifications

Coupling	13-tooth	15-tooth
Spline minimum engagement	14.2 mm [0.56 in]	18.9 mm [0.74 in]
Continuous torque	124 N•m [1100 lbf•in]	235 N•m [2080 lbf•in]
Maximum torque	249 N•m [2200 lbf•in]	339 N•m [3000 lbf•in]
Dimension A	20.7 mm [0.81 in]	12.7 mm [0.5 in]

AUXILIARY MOUNTING PADS (continued)

See page 19 for mating pump pilot and spline dimensions.

SAE-C auxiliary mounting pad

Dimensions

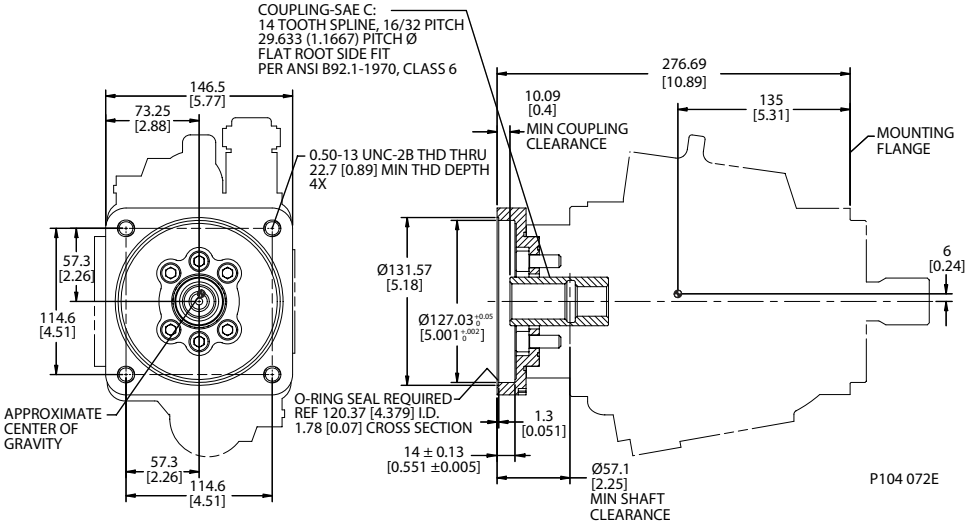

Specifications

Coupling	14-tooth
Spline minimum engagement	18.3 mm [0.72 in]
Continuous torque	235 N•m [2080 lbf•in]
Maximum torque	339 N•m [3000 lbf•in]

DISPLACEMENT LIMITERS

G Frame open circuit pumps are available with an optional adjustable displacement limiter. This adjustable stop limits the pump's maximum displacement.

Setting range

G74B	56 to 74 cm³ [3.39 to 4.52 in³]
G90C	68 to 90 cm³ [4.12 to 5.49 in³]

Displacement limiter cross-section

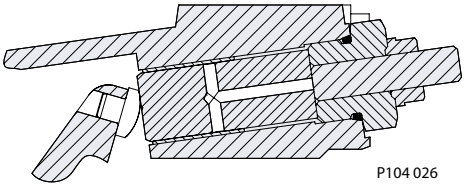

INSTALLATION DRAWINGS

Adjustable displacement limiter

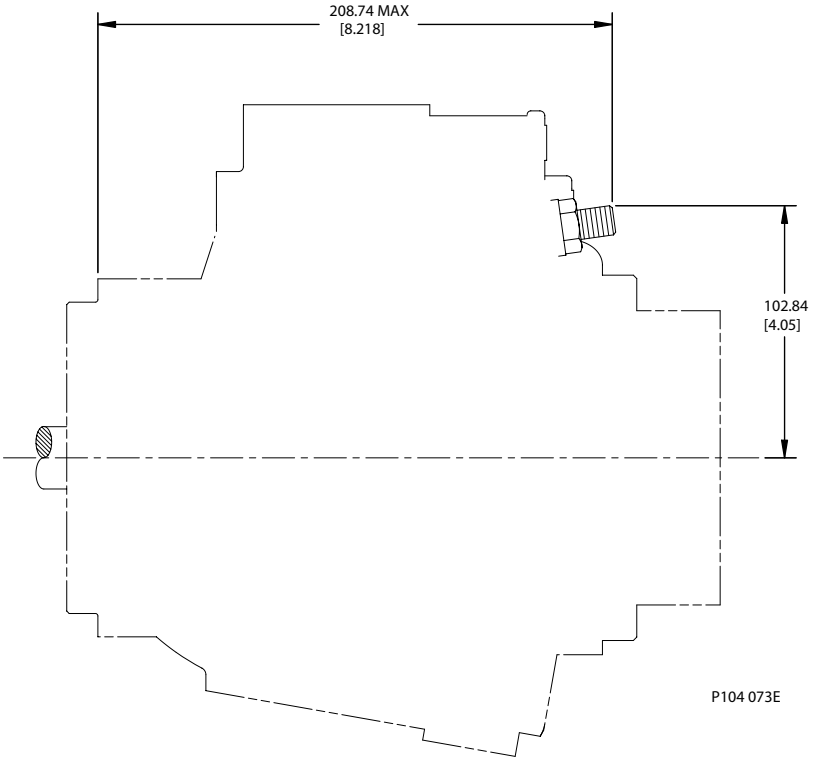

INSTALLATION DRAWINGS (continued)

Axial ported endcap

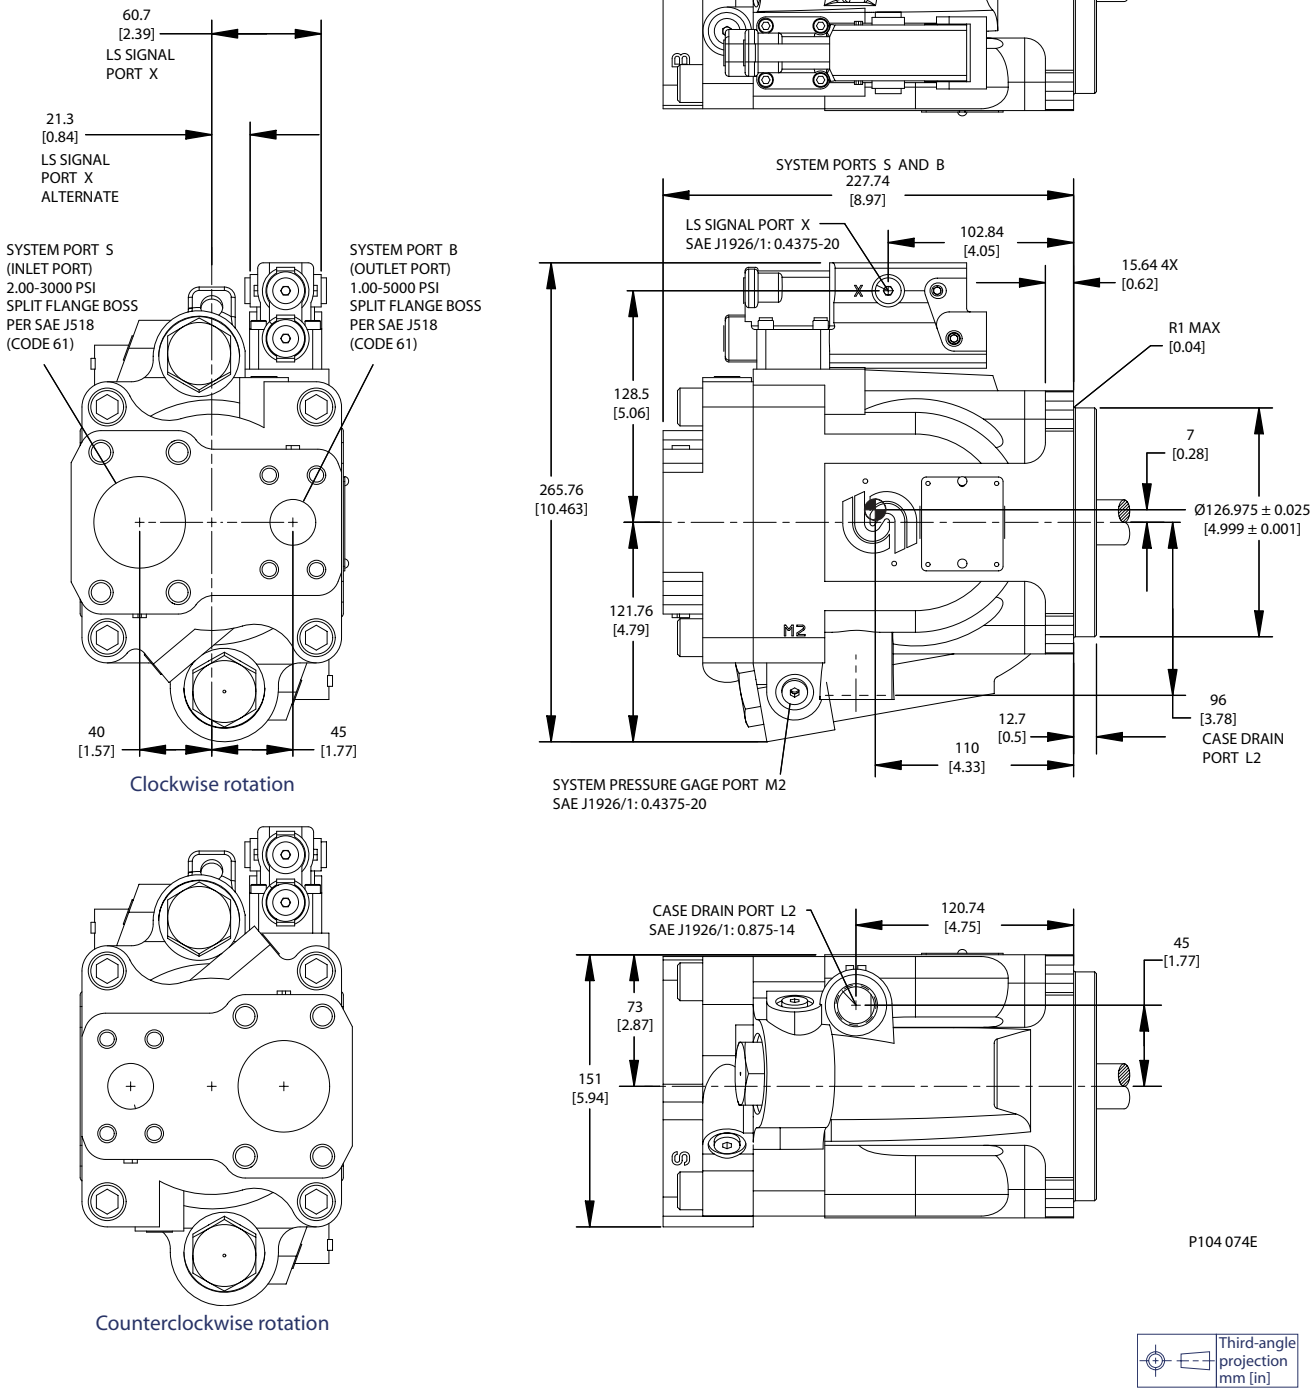

INSTALLATION DRAWINGS (continued)

Axial ported endcap (continued)

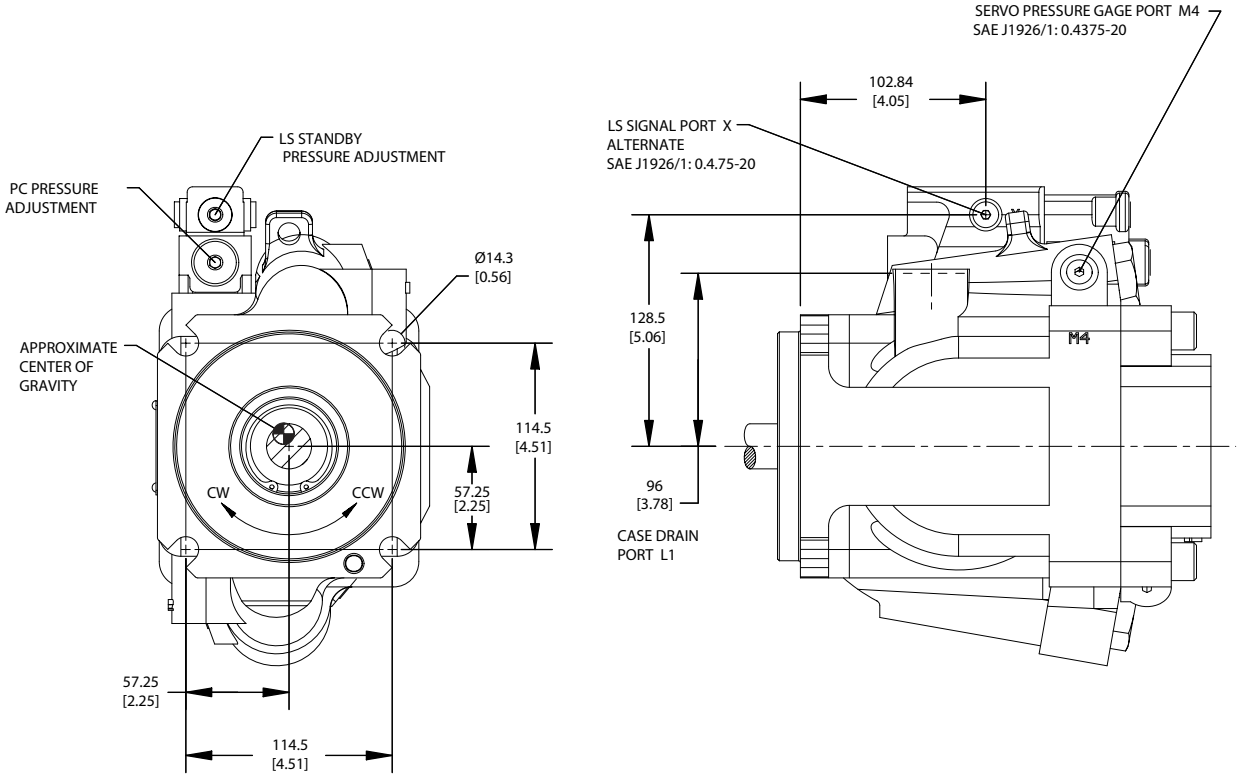

P104 074E

Third-angle projection mm [in]

INSTALLATION DRAWINGS (continued)

Radial ported endcap

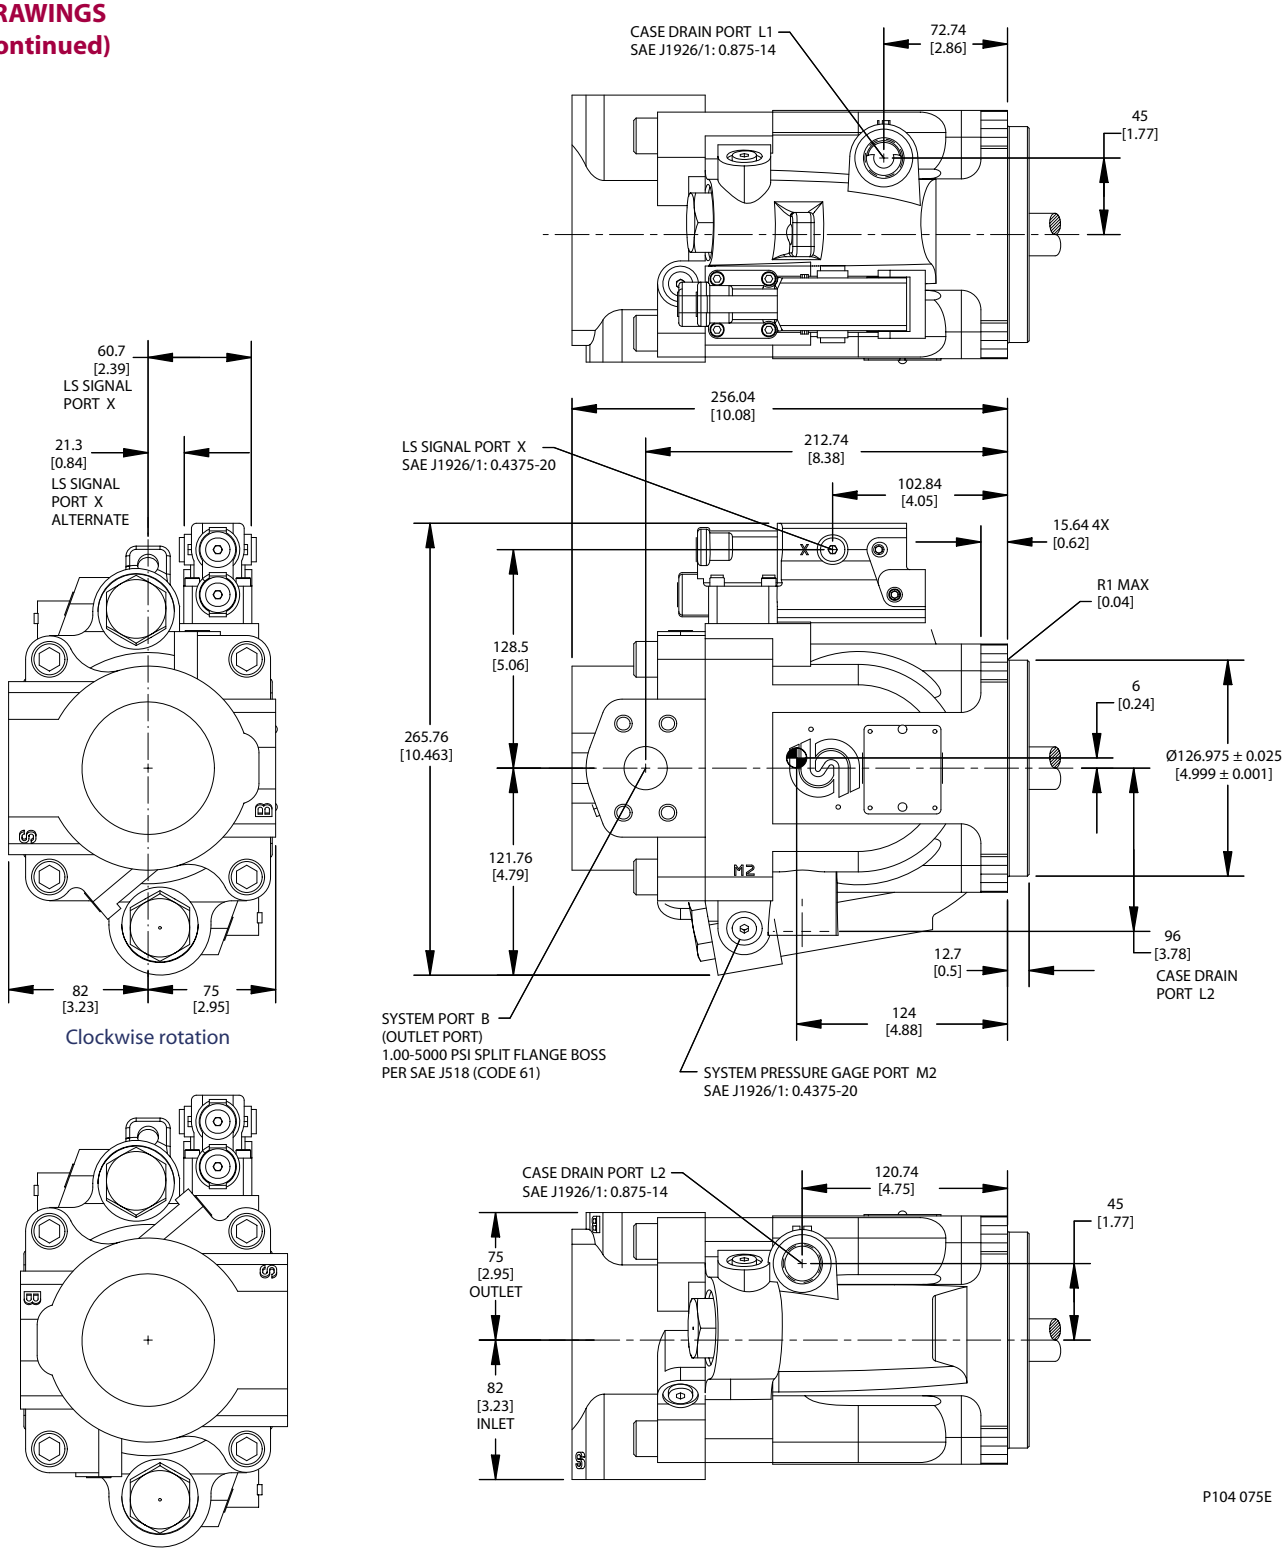

Clockwise rotation

Counterclockwise rotation

Third-angle projection
mm [in]

INSTALLATION DRAWINGS (continued)

Radial ported endcap (continued)

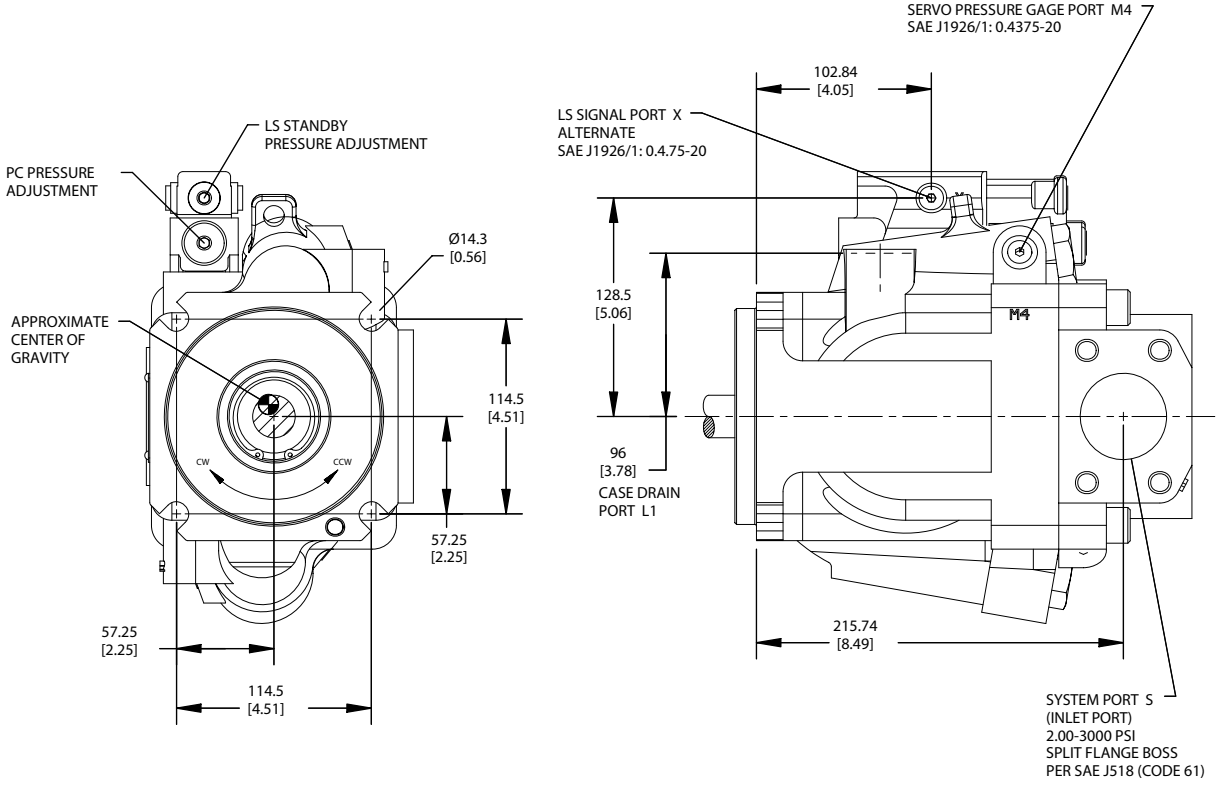

P104 075E

Third-angle projection
mm [in]

DESIGN

Series 45 Frame E pumps have a dual servo piston design with a cradle-type swashplate set in polymer-coated journal bearings. The bias piston increases swashplate angle. The displacement piston decreases swashplate angle. At equal pressure, the larger diameter displacement piston overpowers the bias piston. Nine reciprocating pistons displace fluid from the pump inlet to the pump outlet as the cylinder block rotates on the pump input shaft. The block spring holds the piston slippers to the swashplate via the slipper retainer. The cylinder block rides on a bi-metal valve plate optimized for high volumetric efficiency and low noise. Tapered roller bearings support the input shaft and a viton lip-seal protects against shaft leaks.

An adjustable one spool (PC only, not shown) or two spool (LS) control senses system pressure and load pressure (LS controls). The control ports system pressure to the displacement piston to control pump output flow.

Frame H cross section

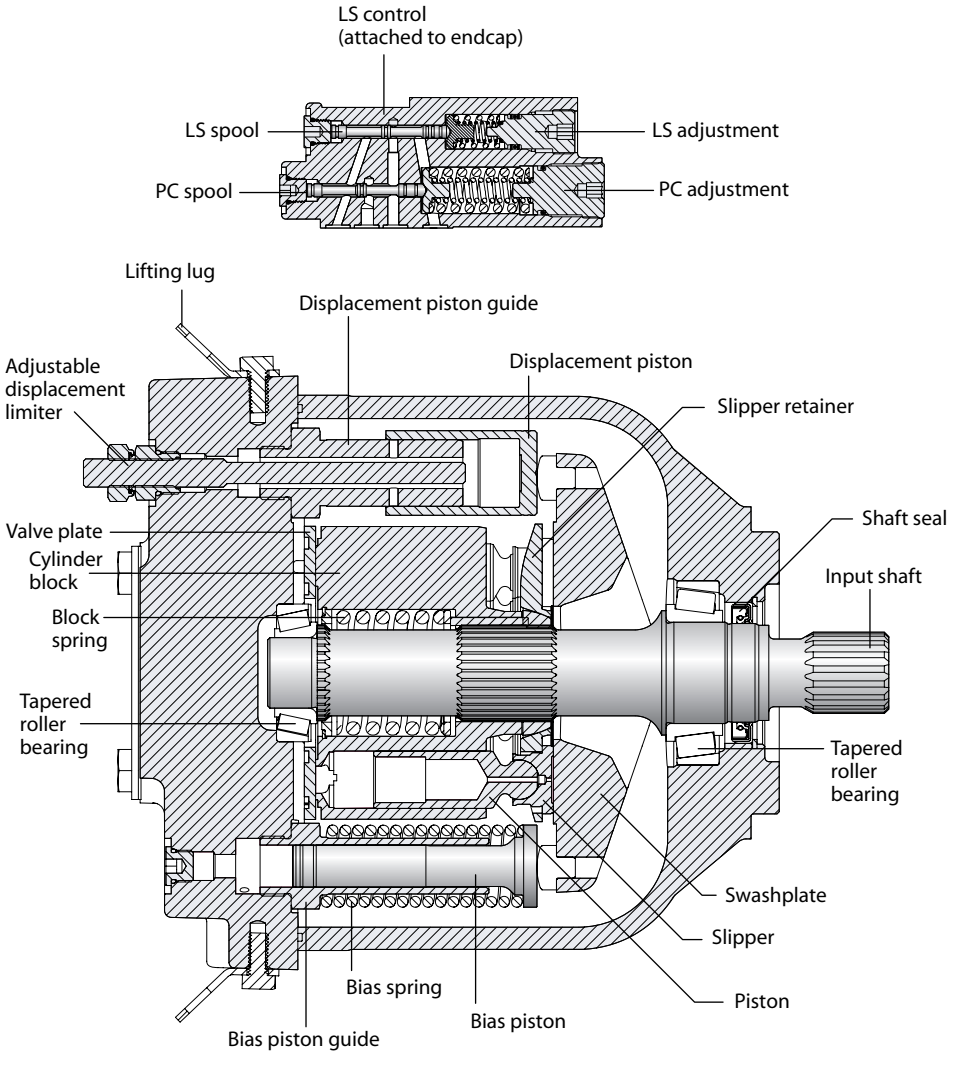

SAUER DANFOSS

Series 45 Axial Piston Open Circuit Pumps
Technical Information
Frame E

SPECIFICATIONS

For general operating parameters, including fluid viscosity, temperature, and inlet and case pressures, *see page 14*. For system design parameters, including installation, filtration, reservoir, and line velocities, *see page 16*.

Features and options

Feature		Unit	Model E100B	Model E130B	Model E147C
Maximum Displacement		cm³ [in³]	100 [6.10]	130 [7.93]	147 [8.97]
Flow at rated speed (theoretical)		l/min [US gal/min]	245 [64.7]	286 [75.6]	309 [81.6]
Input torque at maximum displacement (theoretical)		N•m/bar [lbf•in/1000 psi]	1.592 [972]	2.069 [1263]	2.340 [1428]
Mass moment of inertia of internal rotating components		kg•m² [slug•ft²]	0.0128 [0.0094]	0.0128 [0.0094]	0.0128 [0.0094]
Weight	Axial ports	kg [lb]	51.3 [113]		
	Radial ports		54.9 [121]		
Rotation			Clockwise, Counterclockwise		
Mounting			SAE-C		
Auxiliary mounting (*See page 89*)			SAE-A, SAE-B, SAE-BB, SAE-C, SAE-CC		
System ports (type)			4-bolt split flange		
System ports (location)			Axial, Radial		
Control types (*See page 85*)			PC, Remote PC, LS, LS with internal bleed		
Shafts (*See page 87*)		Splined	13-tooth, 14-tooth, 17-tooth		
		Straight	Ø 38.08 mm [1.5 in]		
Displacement limiters (*See page 90*)			Optional, adjustable		

For definitions of pressure and speed ratings, *see page 15*. For more information on external shaft loads, *see page 17*; mounting flange loads, *see page 18*.

Ratings

Rating		Units	Model E100B	Model E130B	Model E147C
Input speed[1]	minimum	min⁻¹ (rpm)	500	500	500
	continuous		2450	2200	2100
	maximum		2880	2600	2475
Working pressure	continuous	bar [psi]	310 [4495]	310 [4495]	260 [3770]
	maximum		400 [5800]	400 [5800]	350 [5075]
External shaft loads	External moment (M_e)	N•m [lbf•in]	455 [4030]	360 [3190]	396 [3500]
	Thrust in (T_{in}), out (T_{out})	N [lbf]	2846 [640]	1735 [390]	2113 [475]
	Thrust out (T_{out})		7740 [1740]	6672 [1500]	7117 [1600]
Bearing life	at 140 bar [2030 psi]	B_{10} hours	77 200	32 700	21 600
	at 210 bar [3045 psi]		19 800	8400	5500
	at 260 bar [3770 psi]		9700	4116	2700
	at 310 bar [4495 psi]		5400	2300	—
Mounting flange load moments	Vibratory (continuous)	N•m [lbf•in]	1920 [17 000]		
	Shock (max)		6779 [60 000]		

1. Input speeds are valid at 1 bar absolute [0 in Hg vac] inlet pressure. See *Inlet pressure vs. speed* charts.

For more information on noise levels, *see page 20*.

Sound levels[2]

dB(A)	210 bar [3045 psi]		260 bar [3770 psi]		310 bar [4495 psi]	
Model	1800 min⁻¹(rpm)	Rated speed	1800 min⁻¹(rpm)	Rated speed	1800 min⁻¹(rpm)	Rated speed
E100B	75	77	77	78	77	80
E130B	77	81	78	81	78	81
E147C	77	78	78	78	—	—

2. Sound data was collected in a *semi-anechoic* chamber. Values have been adjusted (-3 dB) to reflect *anechoic* levels.

PERFORMANCE E100B

Flow and power data valid at 49°C [120°F] and viscosity of 17.8 mm²/sec [88 SUS].

Flow vs. speed

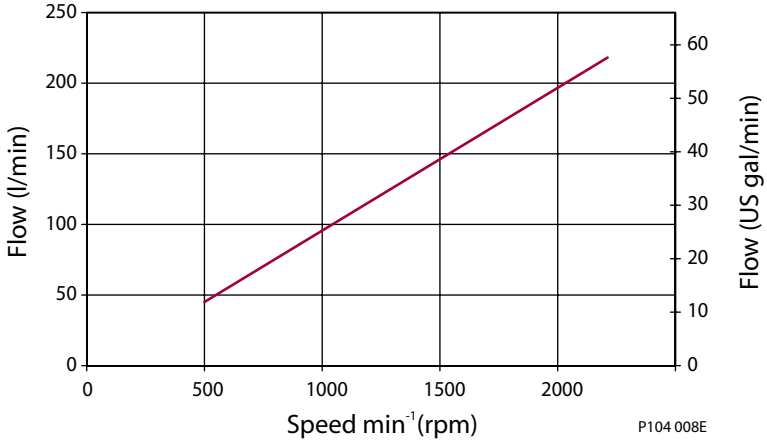

Input power vs. speed

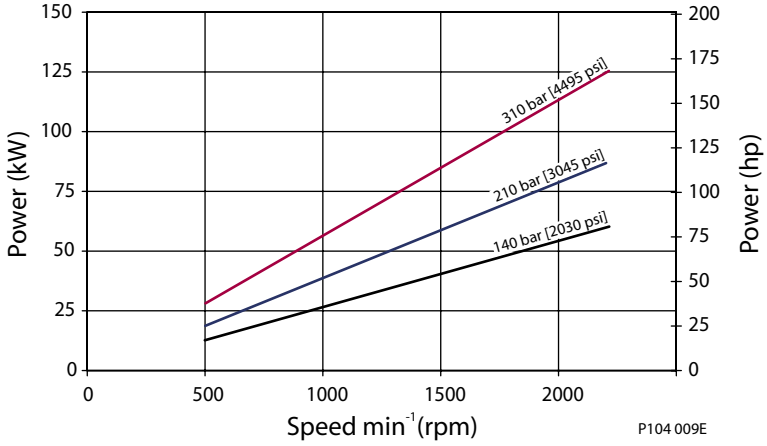

The chart on the right shows allowable inlet pressure and speed at various displacements. Greater speeds and lower inlet pressures are possible at reduced displacement. Operating outside of acceptable limits reduces pump life.

Inlet pressure vs. speed

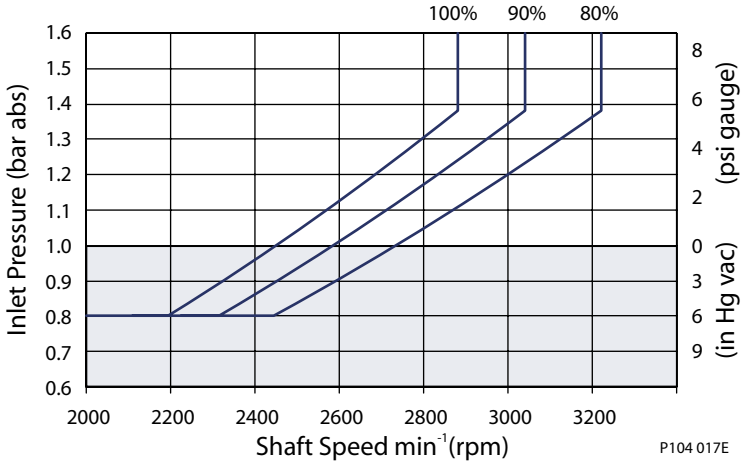

PERFORMANCE E130B

Flow and power data valid at 49°C [120°F] and viscosity of 17.8 mm²/sec [88 SUS].

Flow vs. speed

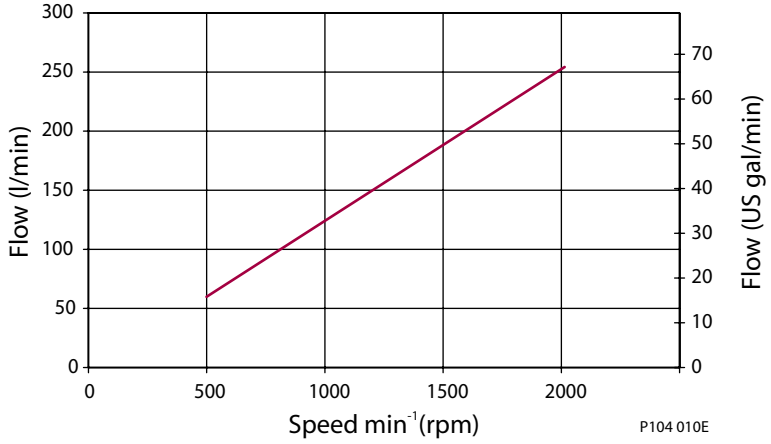

Input power vs. speed

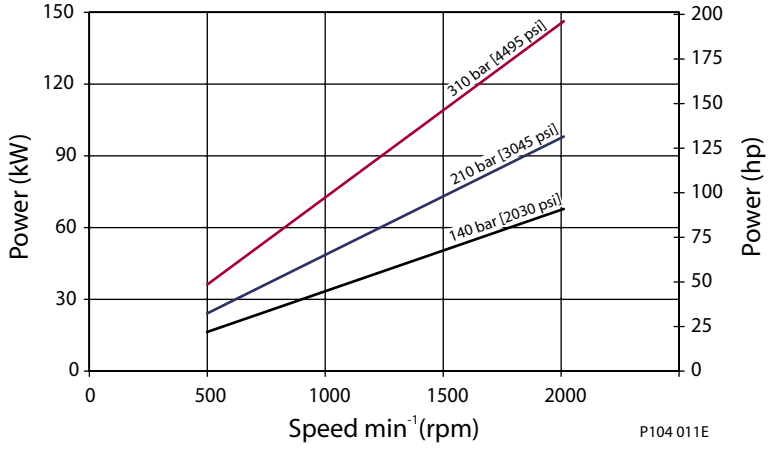

The chart on the right shows allowable inlet pressure and speed at various displacements. Greater speeds and lower inlet pressures are possible at reduced displacement. Operating outside of acceptable limits reduces pump life.

Inlet pressure vs. speed

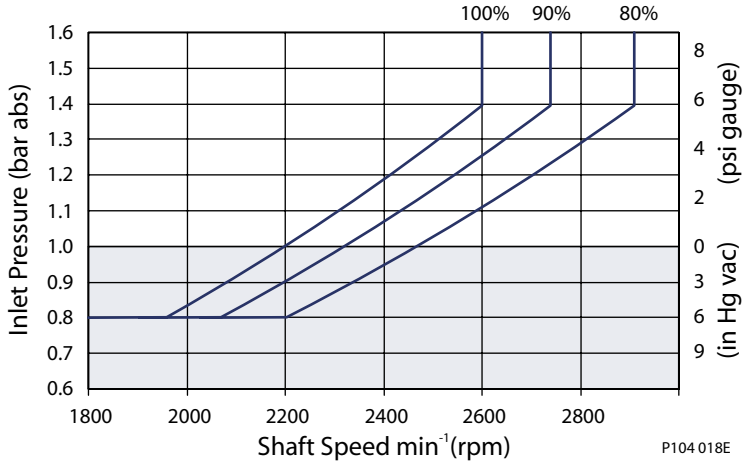

PERFORMANCE E147C

Flow and power data valid at 49°C [120°F] and viscosity of 17.8 mm²/sec [88 SUS].

Flow vs. speed

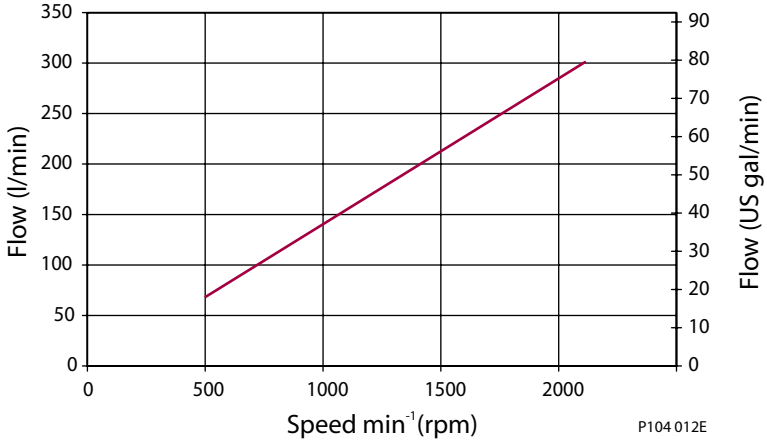

Input power vs. speed

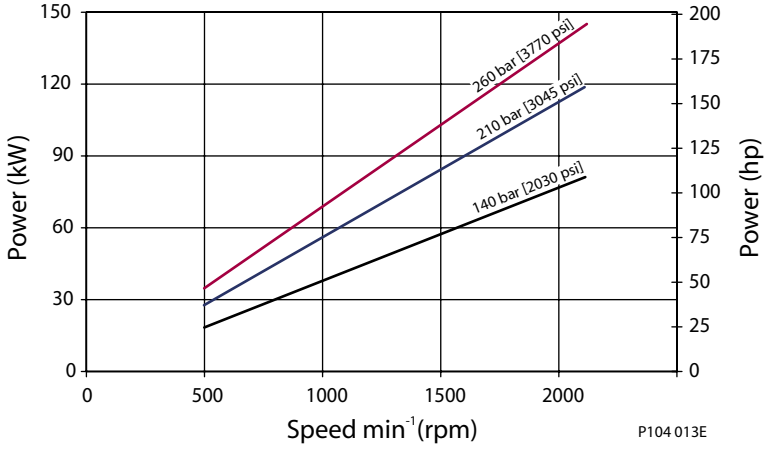

The chart on the right shows allowable inlet pressure and speed at various displacements. Greater speeds and lower inlet pressures are possible at reduced displacement. Operating outside of acceptable limits reduces pump life.

Inlet pressure vs. speed

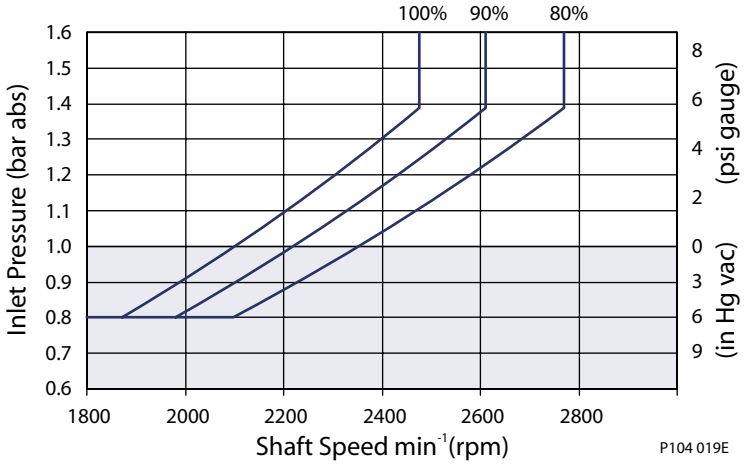

Series 45 Axial Piston Open Circuit Pumps
Technical Information
Frame E

ORDER CODE

R *Product*

ER	E Frame, variable displacement open circuit pump

S *Rotation*

L	Left hand (counterclockwise)
R	Right hand (clockwise)

P *Displacement and pressure rating*

100B	100 cm³/rev [6.10 in³/rev], 310 bar [4495 psi] continuous working pressure
130B	130 cm³/rev [7.93 in³/rev], 310 bar [4495 psi] continuous working pressure
147C	147 cm³/rev [8.97 in³/rev], 260 bar [3770 psi] continuous working pressure

C *Control type*

PC	Pressure compensated control
RP	Remote pressure compensated control
LS	Load sensing / pressure compensating control
LB	Load sensing / pressure compensating control with internal bleed orifice

D *PC setting (2 digit code, 10 bar increments)*

Example	10 = 100 bar
10–31	100 to 310 bar [1450 to 4495 psi] (100B, 130B)
10–26	100 to 260 bar [1450 to 3770 psi] (147C)

E *Load sensing setting (2 digit code, 1 bar increments)*

Example	20 = 20 bar
10–30	10 to 30 bar [145 to 435 psi]
NN	Not applicable (use with PC controls)

F *Not used*

NN	Not applicable

G *Pilot orifice*

N	None (standard)

H *Gain orifice*

3	Standard orifice

Series 45 Axial Piston Open Circuit Pumps
Technical Information
Frame E

ORDER CODE (continued)

J1 *Input shaft*

S1	14-tooth, 12/24 pitch (ANSI B92.1 1970 - Class 5)
S2	17-tooth, 12/24 pitch (ANSI B92.1 1970 - Class 5)
S4	13-tooth, 8/16 pitch (ANSI B92.1 1970 - Class 5)
K5	Ø 38.08 mm [1.5 in], straight keyed

J2 *Auxiliary mounting flange*

N	None
A	SAE-A, 9-tooth coupling
T	SAE-A, 11-tooth coupling
B	SAE-B, 13-tooth coupling
V	SAE-BB, 15-tooth coupling
C	SAE-C, 14-tooth coupling
W	SAE-CC, 17-tooth coupling

J3 *System port size and location*

Code	Location	Port type	Inlet size	Outlet size
P	Radial	4-bolt split-flange	2 ½ in.	1 ¼ in.
L	Axial	4-bolt split-flange	2 ½ in.	1 ¼ in.

K1 *Shaft seal*

A	Single lip seal, viton

K2 *Mounting flange and housing port style*

1	SAE-C 4-bolt, SAE O-ring boss housing ports

K3 *Not used*

N	Not applicable

L *Displacement limiter*

NNN	None
AAA	Adjustable, factory set at max angle

M *Special hardware*

NNN	None

N *Special features*

NNN	None

CONTROLS

Pressure compensated control (PC)

Specifications

PC control setting range

Model	bar	psi
E100B	100–310	1450–4495
E130B	100–310	1450–4495
E147C	100–260	1450–3770

*Response/recovery times**

(ms)	Response	Recovery
E100B	45	175
E130B	55	175
E147C	60	190

* For definitions, *see page 11*.

Schematic diagram

PC schematic

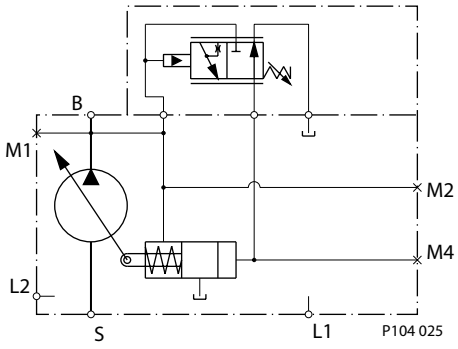

Legend

B = Outlet
S = Inlet
L1, L2 = Case drain
M2 = System pressure gauge port
M4 = Servo pressure gauge port

Remote PC Control (RP)

Specifications

PC control setting range

Model	bar	psi
E100B	100–310	1450–4495
E130B	100–310	1450–4495
E147C	100–260	1450–3770

*Response/recovery times**

(ms)	Response	Recovery
E100B	45	175
E130B	55	175
E147C	60	190

* For definitions, *see page 12*.

Schematic diagram

Remote PC schematic

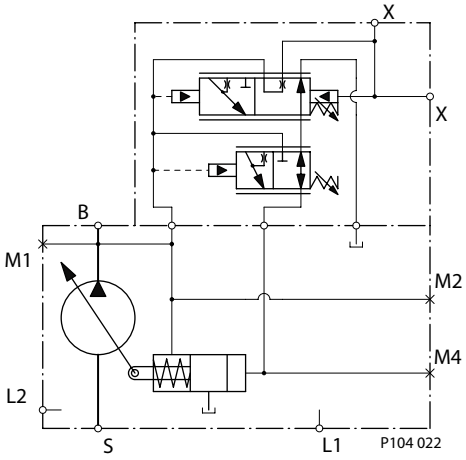

Legend

B = Outlet
S = Inlet
L1, L2 = Case drain
M2 = System pressure gauge port
M4 = Servo pressure gauge port
X = Remote PC port

CONTROLS (continued)

Load sensing control (LS)

Specifications

PC setting range

Model	bar	psi
E100B	100–310	1450–4495
E130B	100–310	1450–4495
E147C	100–260	1450–3770

*Response/recovery times**

(ms)	Response	Recovery
E100B	45	200
E130B	50	200
E147C	60	200

* For definitions, *see page 13*.

Schematic diagram

LS Schematic

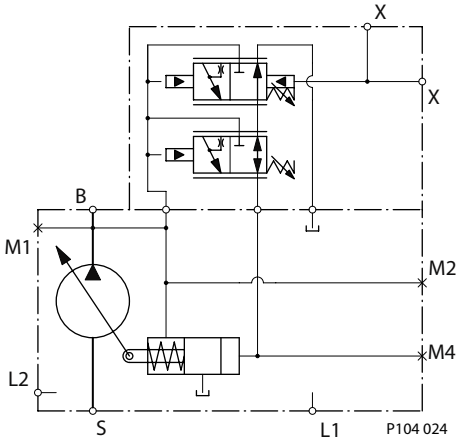

LS setting range

Model	bar	psi
All	10–30	145–435

Legend

B = Outlet
S = Inlet
L1, L2 = Case drain
M2 = System pressure gauge port
M4 = Servo pressure gauge port
X = LS signal port

Load sensing control with internal bleed orifice (LB)

Specifications

PC setting range

Model	bar	psi
E100B	100–310	1450–4495
E130B	100–310	1450–4495
E147C	100–260	1450–3770

*Response/recovery times**

(ms)	Response	Recovery
E100B	45	200
E130B	50	200
E147C	60	200

* For definitions, *see page 13*.

Schematic diagram

LB Schematic

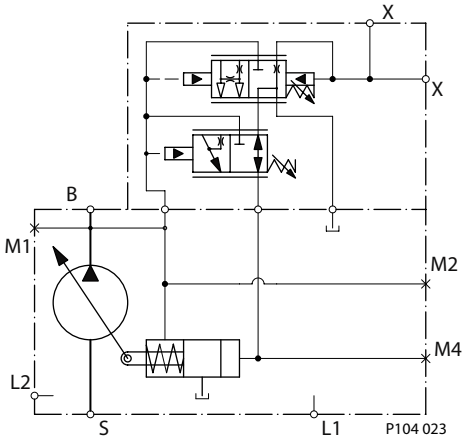

LS setting range

Model	bar	psi
All	10–30	145–435

Legend

B = Outlet
S = Inlet
L1, L2 = Case drain
M2 = System pressure gauge port
M2 = Servo pressure gauge port
X = LS signal port

INPUT SHAFTS

Shaft data

Code	Description	Torque rating[1] Continuous N•m [lbf•in]	Torque rating[1] Maximum N•m [lbf•in]	Drawing
S1	14-tooth spline 12/24 pitch (ANSI B92.1 1970 - Class 5)	427 [3780]	1093 [9675]	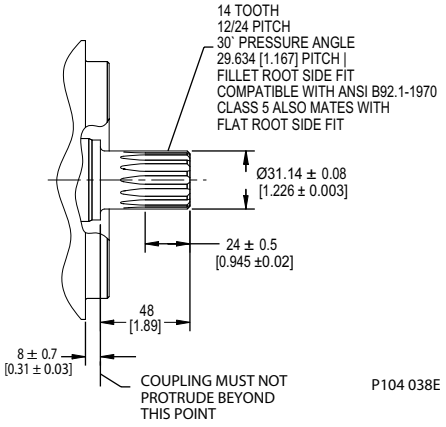
S2	17-tooth spline 12/24 pitch (ANSI B92.1 1970 - Class 5)	499 [4420]	1044 [9240]	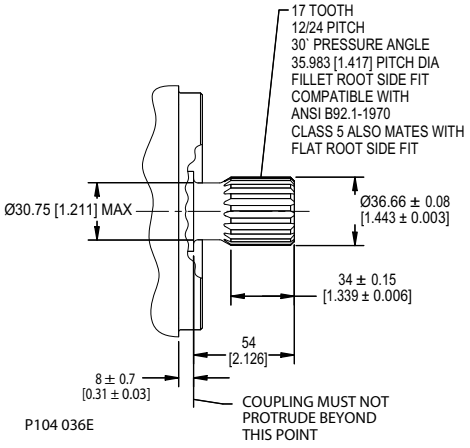
S4	13-tooth spline 8/16 pitch (ANSI B92.1 1970 - Class 5)	703 [6225]	1551 [13 730]	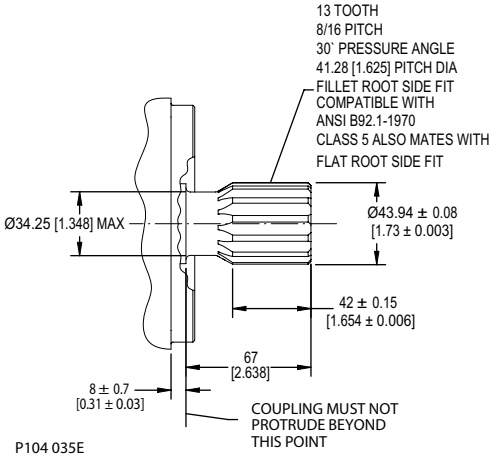

1. See *Input shaft torque ratings*, page 19 for definitions of continuous and maximum torque.

INPUT SHAFTS (continued)

Code	Description	Torque rating[1]		Drawing
		Continuous N•m [lbf•in]	Maximum N•m [lbf•in]	
K5	Ø 38.08 mm [1.5 in] Straight keyed	N/A	1161 [10 270]	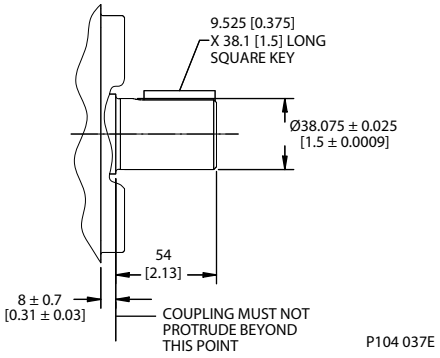

1. See *Input shaft torque ratings*, page 19 for definitions of continuous and maximum torque.

AUXILIARY MOUNTING PADS

See page 19 for mating pump pilot and spline dimensions.

SAE-A auxiliary mounting pad

Dimensions

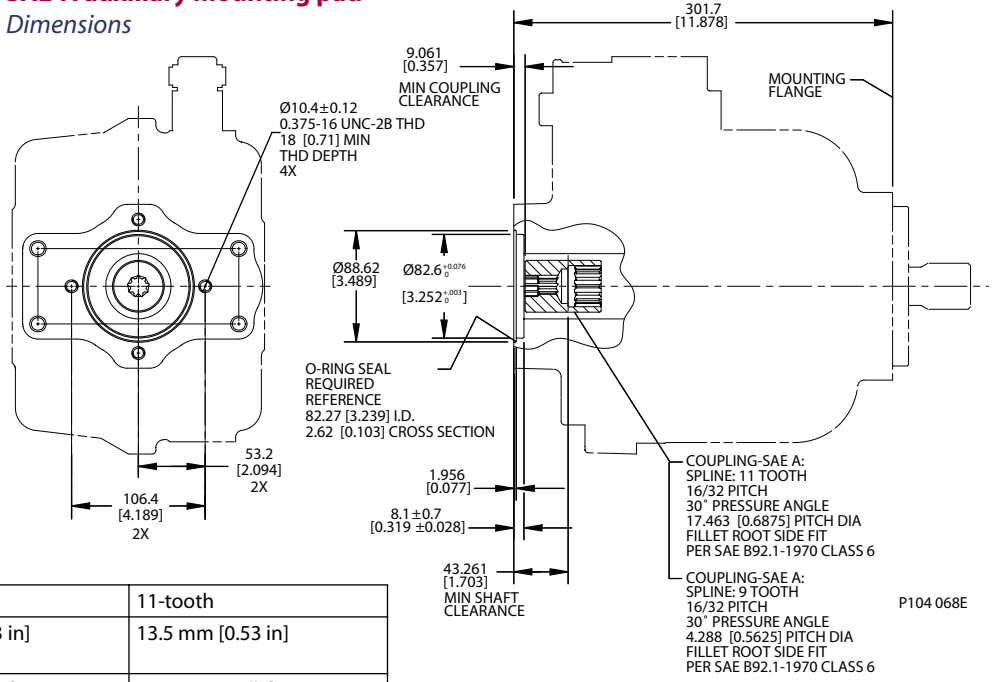

Specifications

Coupling	9-tooth	11-tooth
Spline minimum engagement	13.5 mm [0.53 in]	13.5 mm [0.53 in]
Continuous torque	51 N•m [450 lbf•in]	90 N•m [800 lbf•in]
Maximum torque	107 N•m [950 lbf•in]	147 N•m [1300 lbf•in]

See page 19 for mating pump pilot and spline dimensions.

SAE-B auxiliary mounting pad

Dimensions

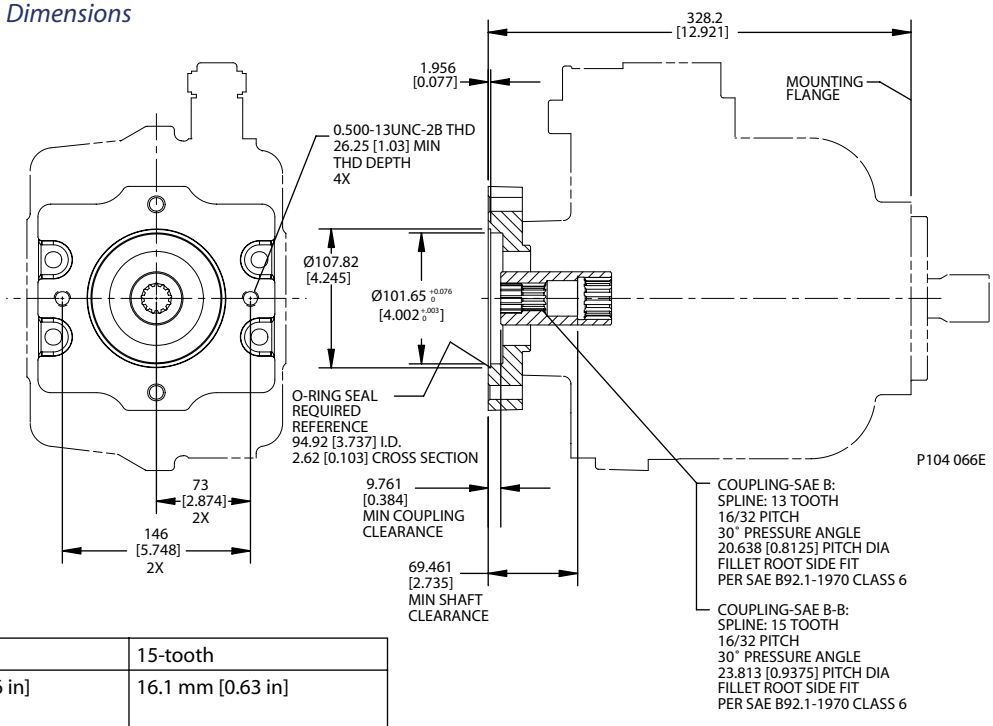

Specifications

Coupling	13-tooth	15-tooth
Spline minimum engagement	14.2 mm [0.56 in]	16.1 mm [0.63 in]
Continuous torque	124 N•m [1100 lbf•in]	235 N•m [2080 lbf•in]
Maximum torque	249 N•m [2200 lbf•in]	339 N•m [3000 lbf•in]

AUXILIARY MOUNTING PADS (continued)

See page 19 for mating pump pilot and spline dimensions.

SAE-C auxiliary mounting pad

Dimensions

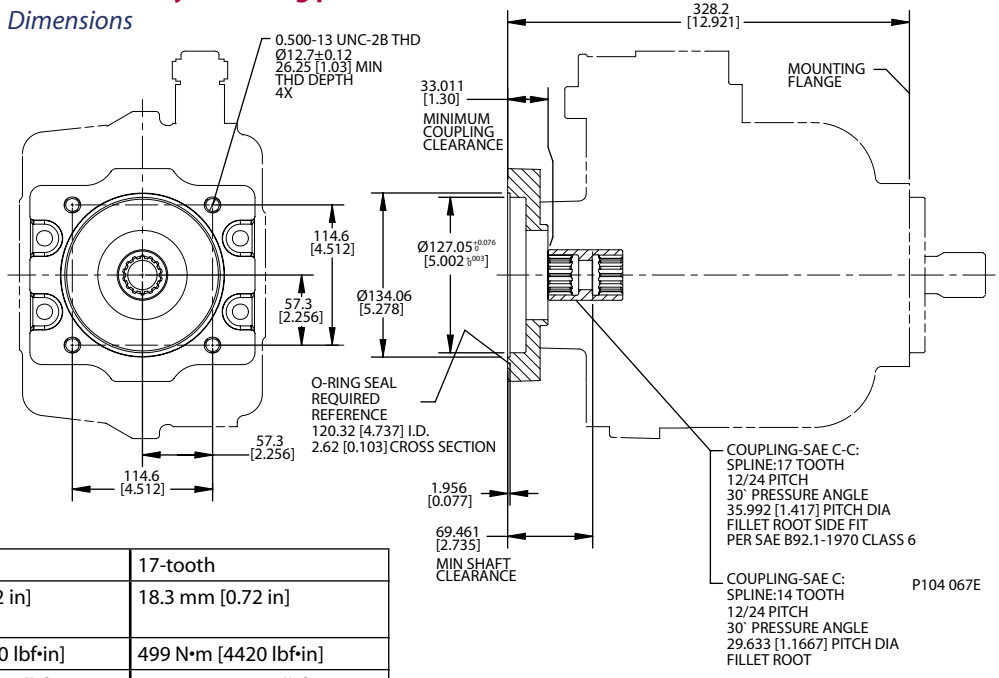

Specifications

Coupling	14-tooth	17-tooth
Spline minimum engagement	18.3 mm [0.72 in]	18.3 mm [0.72 in]
Continuous torque	427 N•m [3780 lbf•in]	499 N•m [4420 lbf•in]
Maximum torque	1093 N•m [9675 lbf•in]	1044 N•m [9240 lbf•in]

DISPLACEMENT LIMITERS

E Frame open circuit pumps are available with an optional adjustable displacement limiter. This adjustable stop limits the pump's maximum displacement.

Displacement limiter cross-section

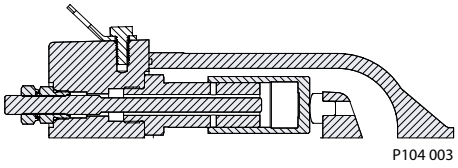

Setting range

E100B	40 to 100 cm³ [2.44 to 6.1 in³]
E130B	70 to 130 cm³ [4.27 to 7.93 in³]
E147C	87 to 147 cm³ [5.31 to 8.97 in³]

NOTES

INSTALLATION DRAWINGS

Axial ported endcap, clockwise rotation

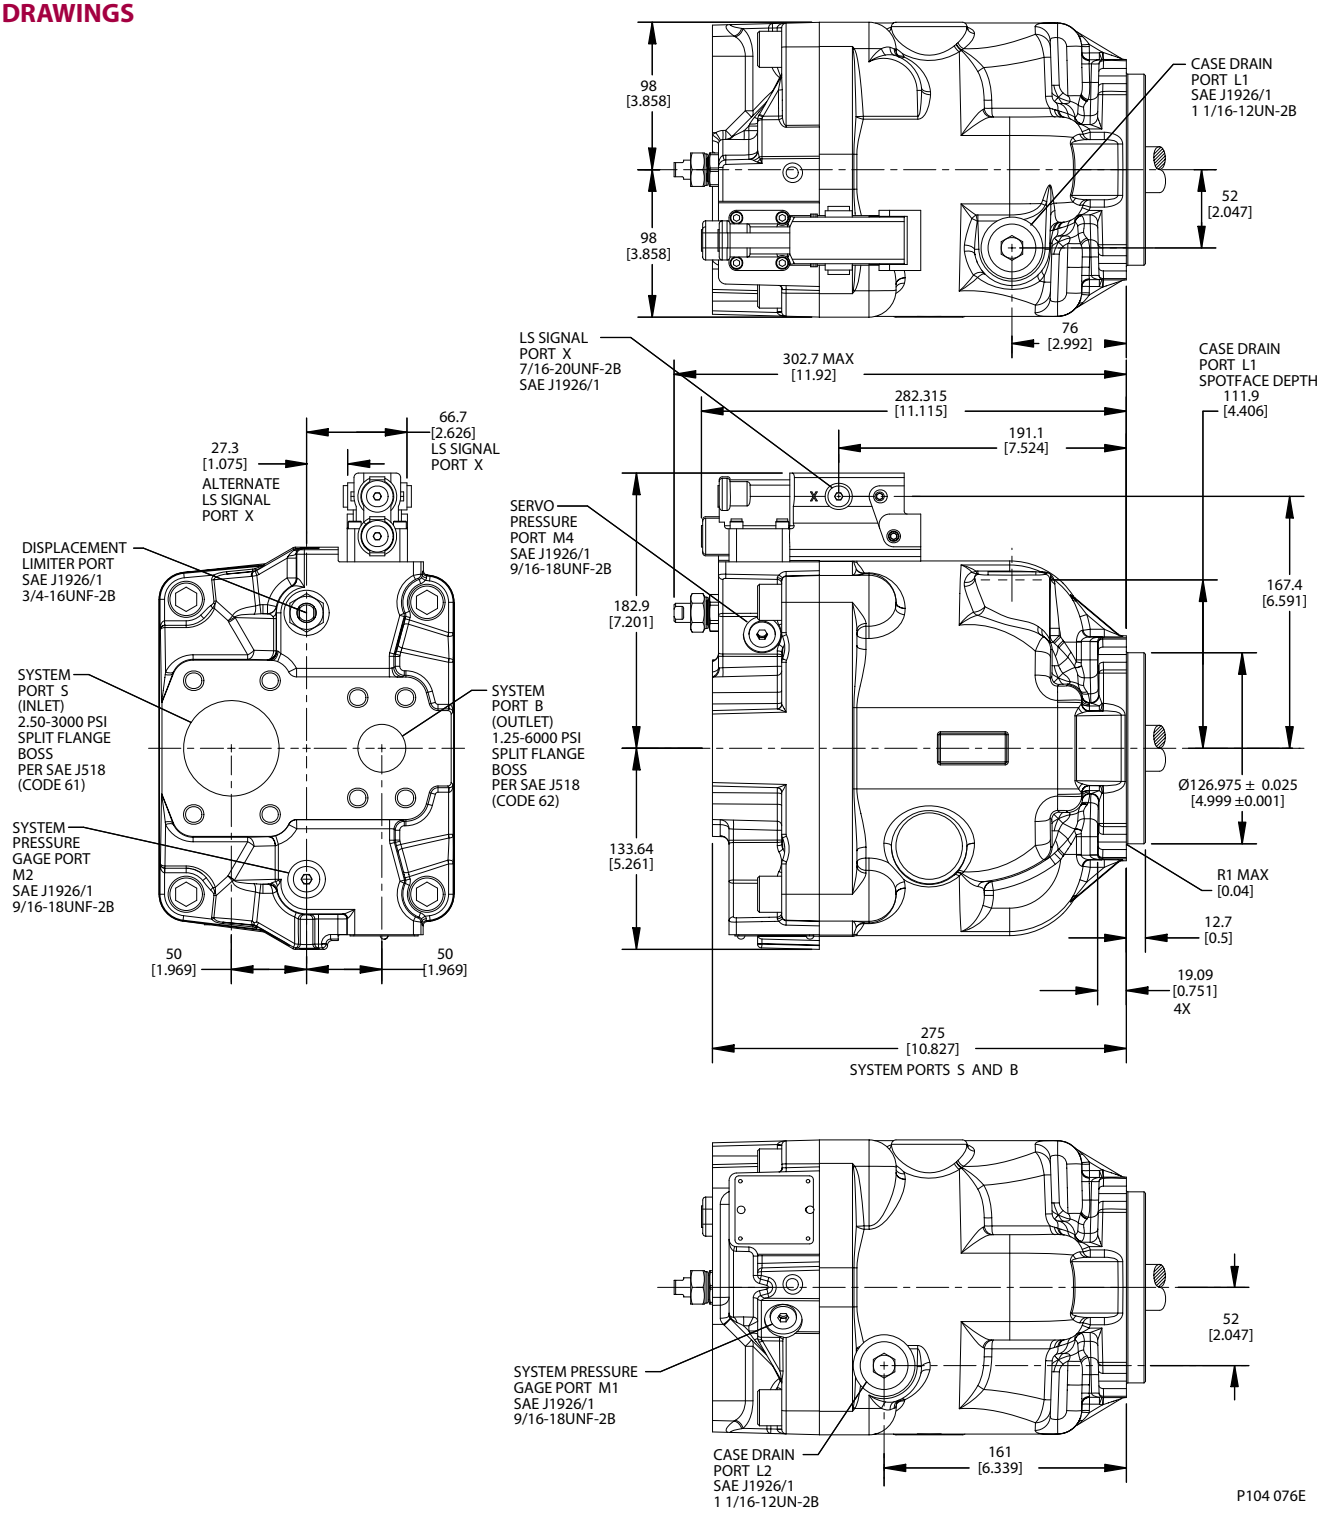

Third-angle projection
mm [in]

INSTALLATION DRAWINGS (continued)

Axial ported endcap, clockwise rotation (continued)

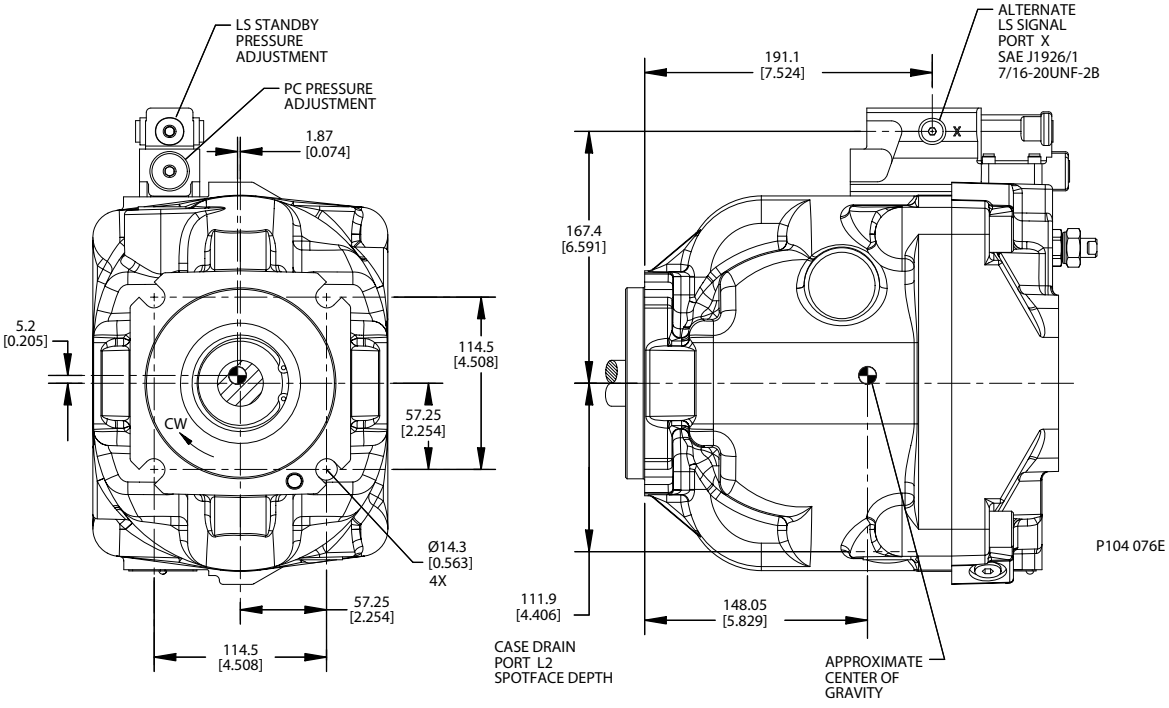

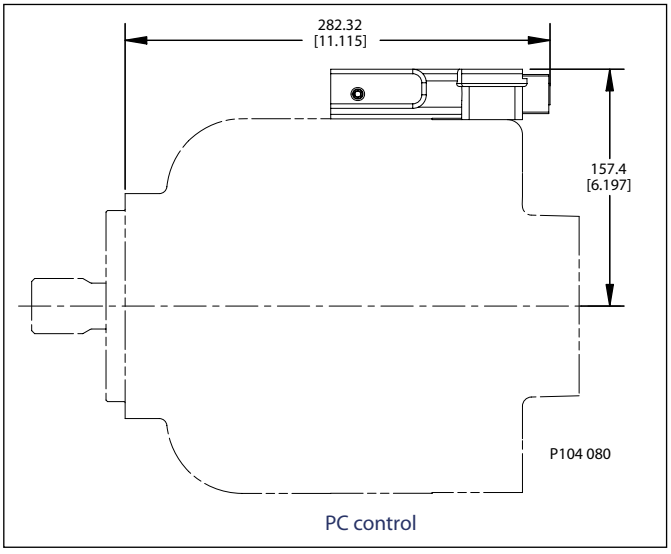

Third-angle projection mm [in]

INSTALLATION DRAWINGS (continued)

Axial ported endcap, counterclockwise rotation

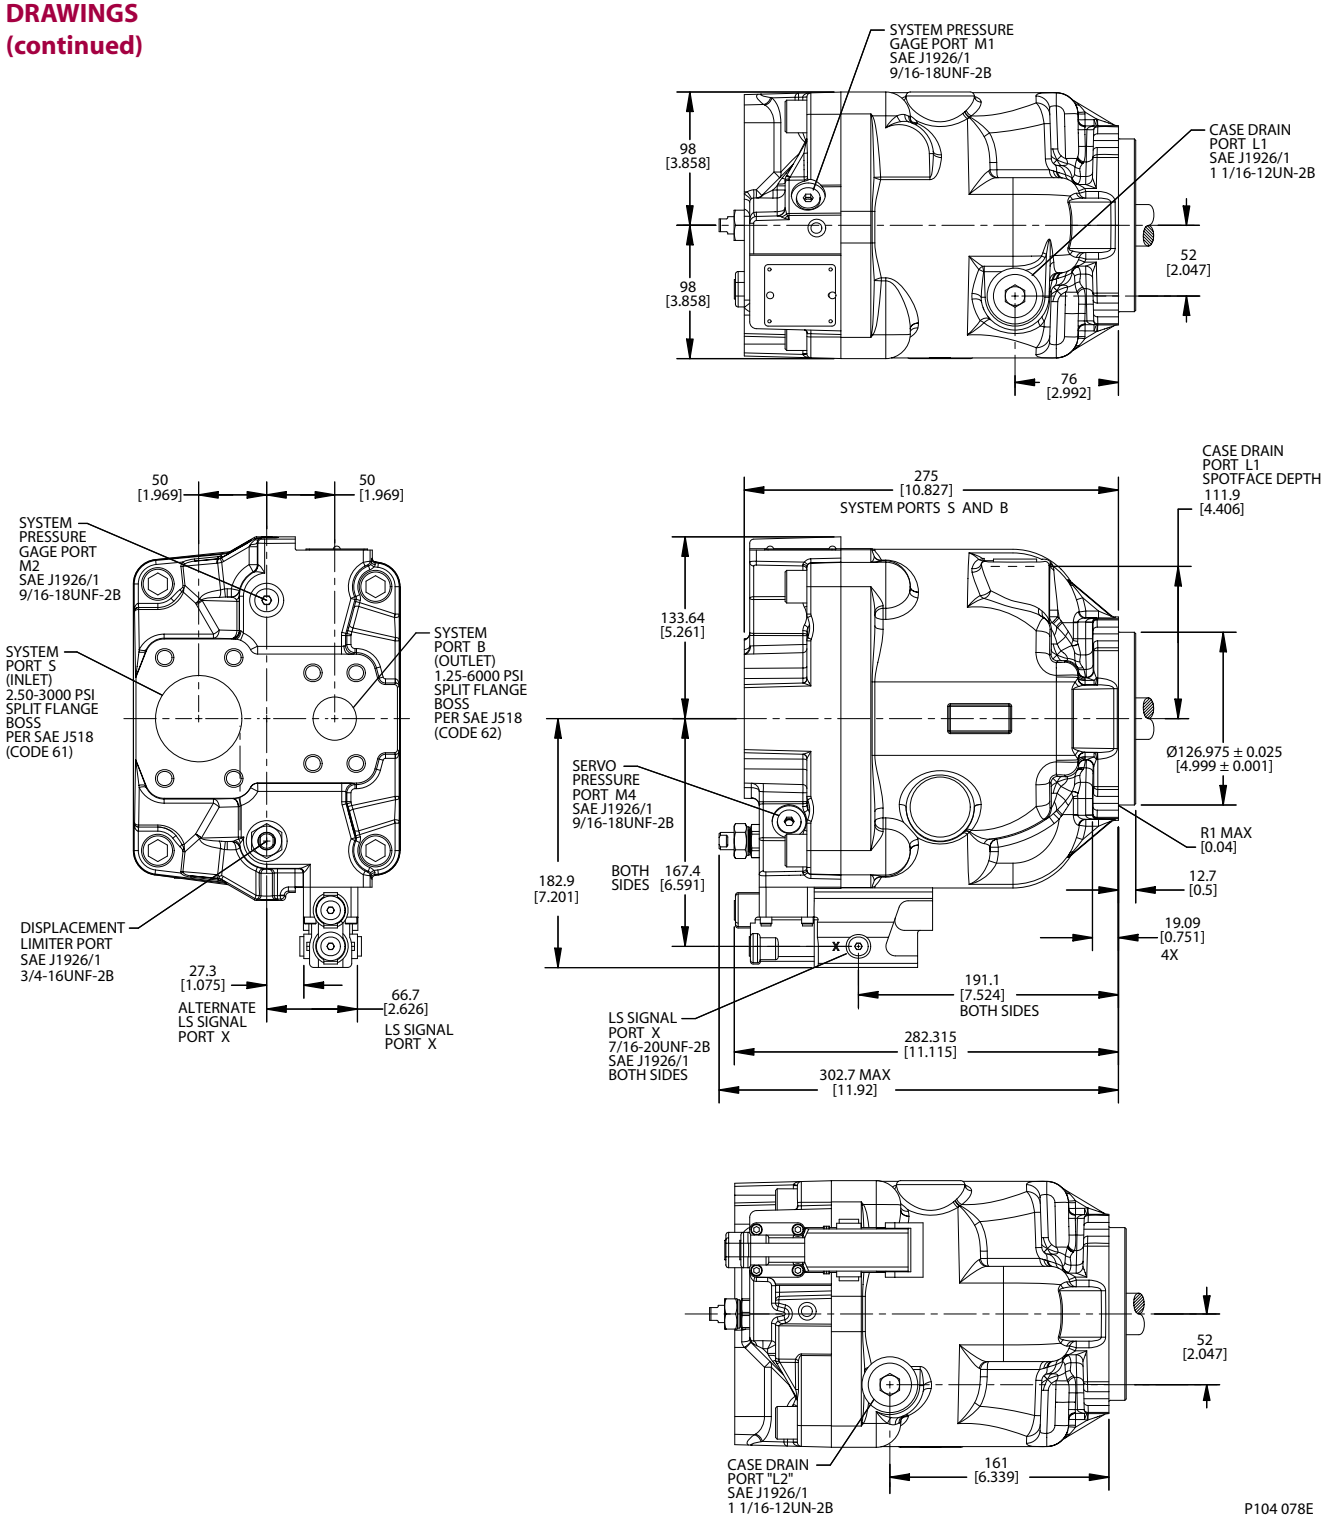

Third-angle projection
mm [in]

INSTALLATION DRAWINGS (continued)

Axial ported endcap, counterclockwise rotation (continued)

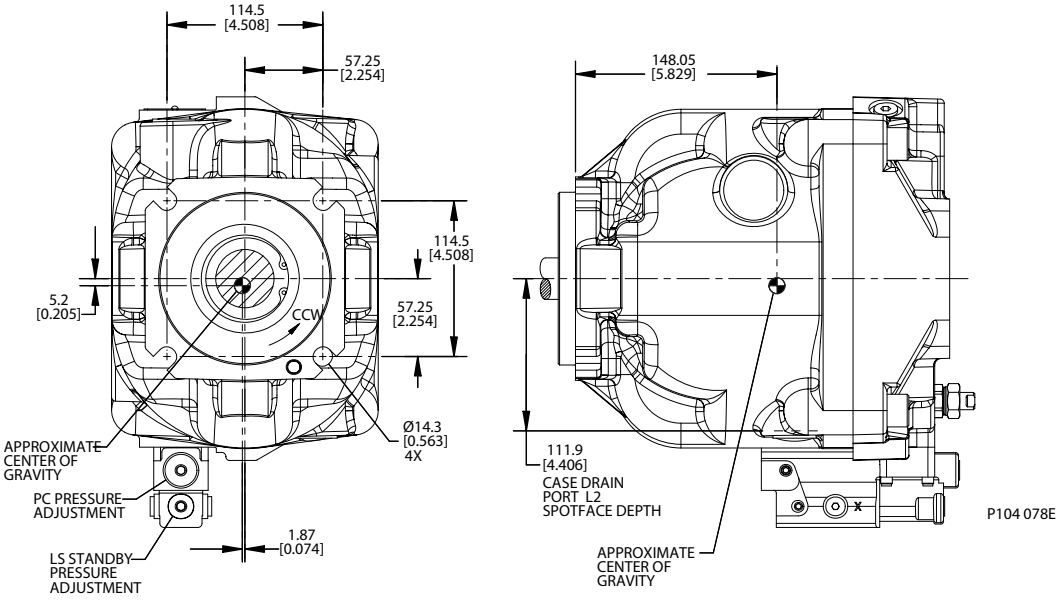

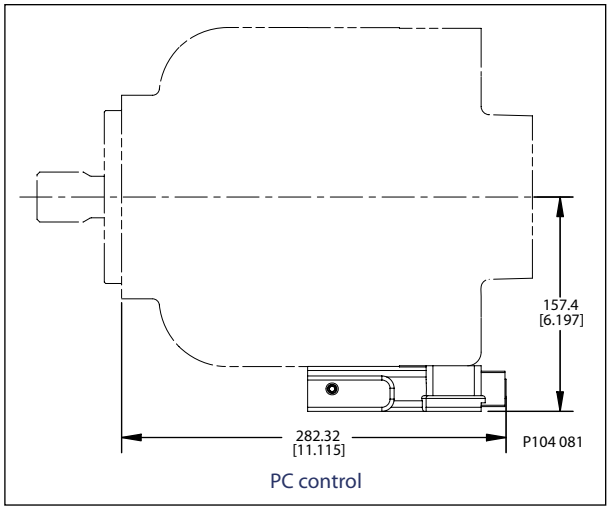

PC control

Third-angle projection mm [in]

INSTALLATION DRAWINGS

Radial ported endcap, clockwise rotation

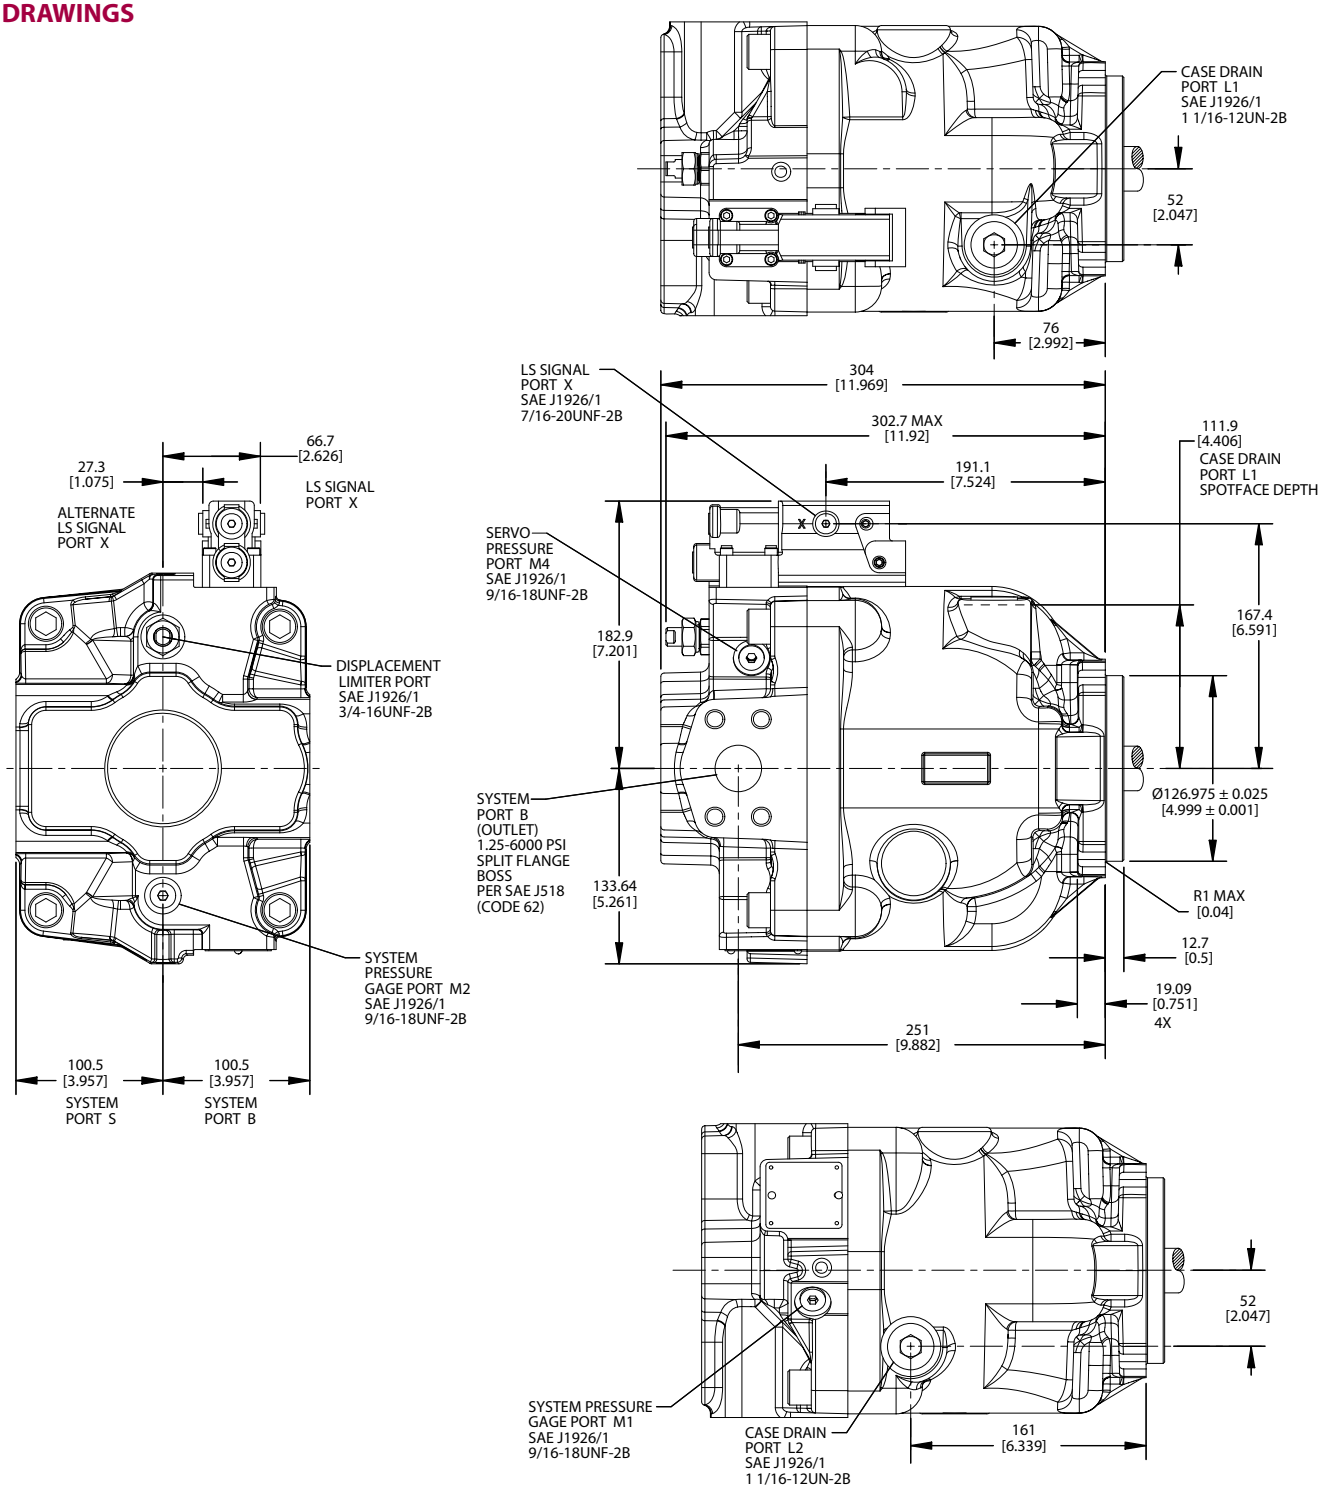

P104 077E

Third-angle projection
mm [in]

INSTALLATION DRAWINGS (continued)

Radial ported endcap, clockwise rotation (continued)

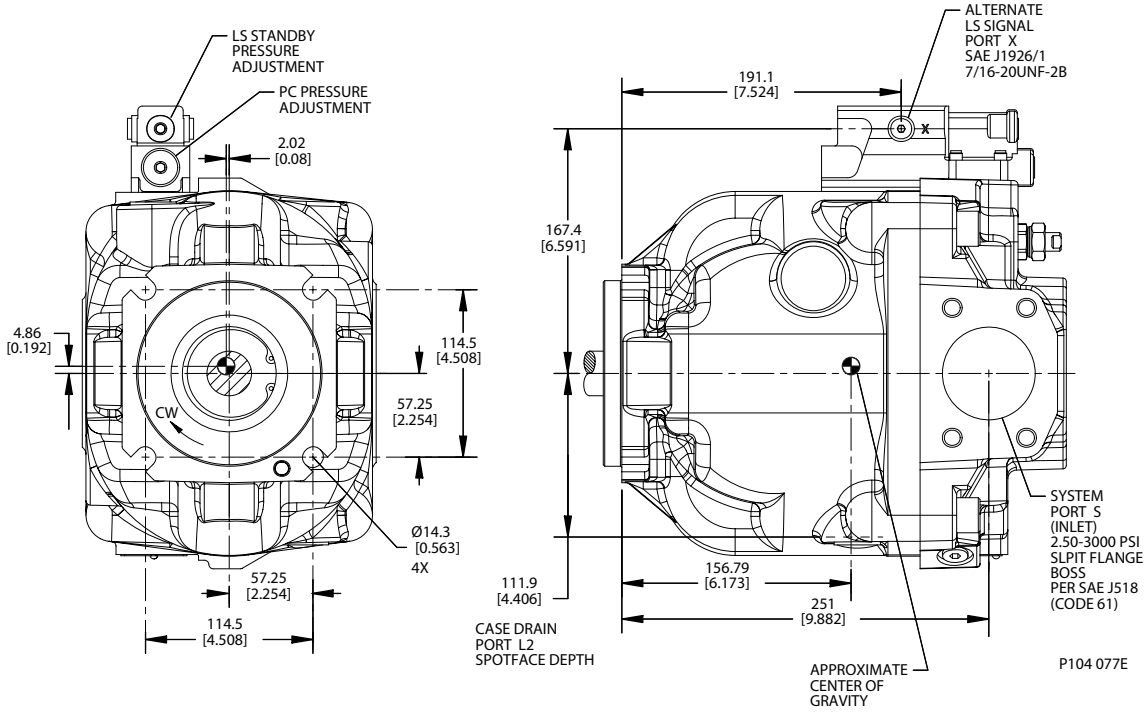

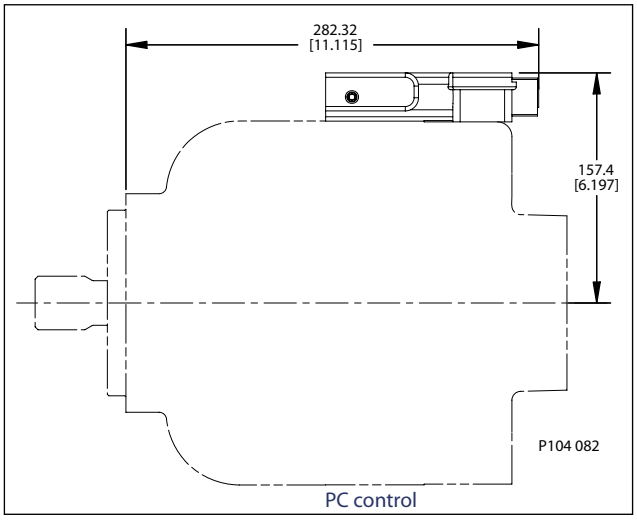

Third-angle projection mm [in]

INSTALLATION DRAWINGS (continued)

Radial ported endcap, counterclockwise rotation

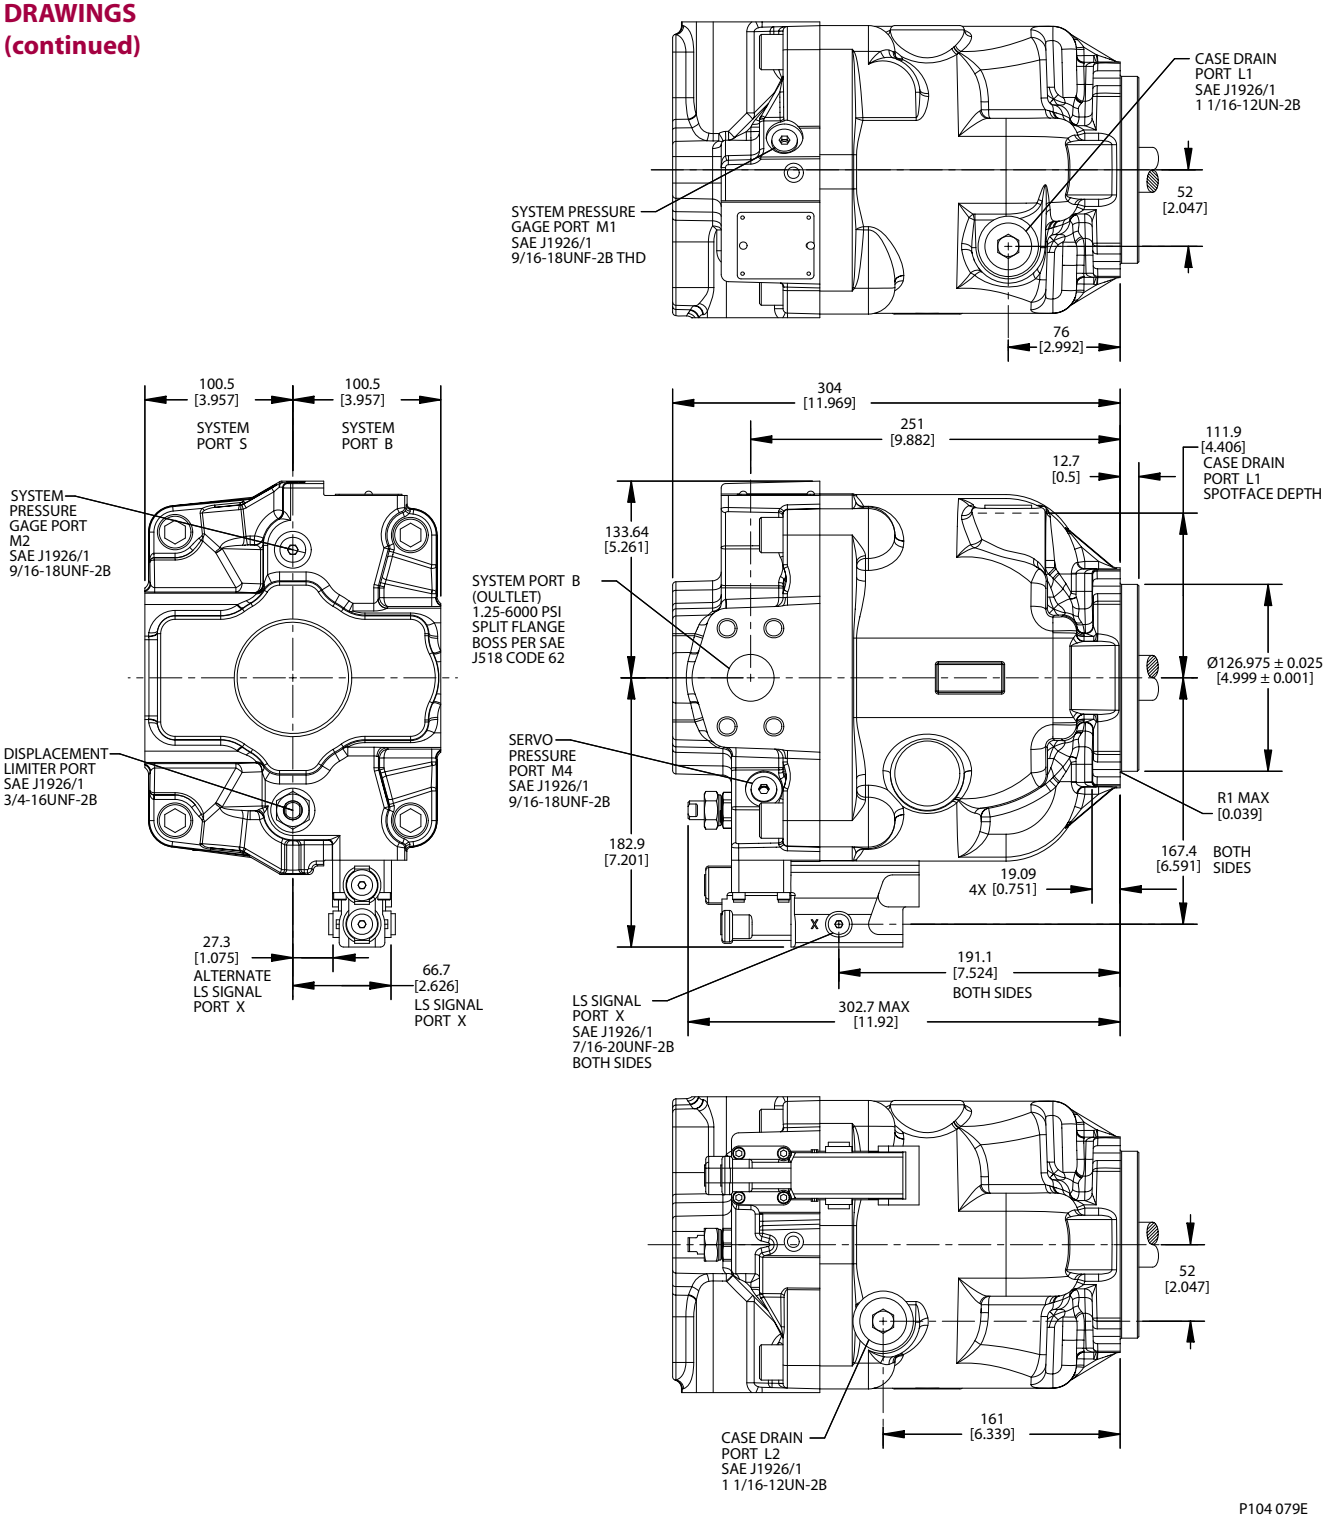

P104 079E

Third-angle projection mm [in]

INSTALLATION DRAWINGS (continued)

Radial ported endcap, counterclockwise rotation (continued)

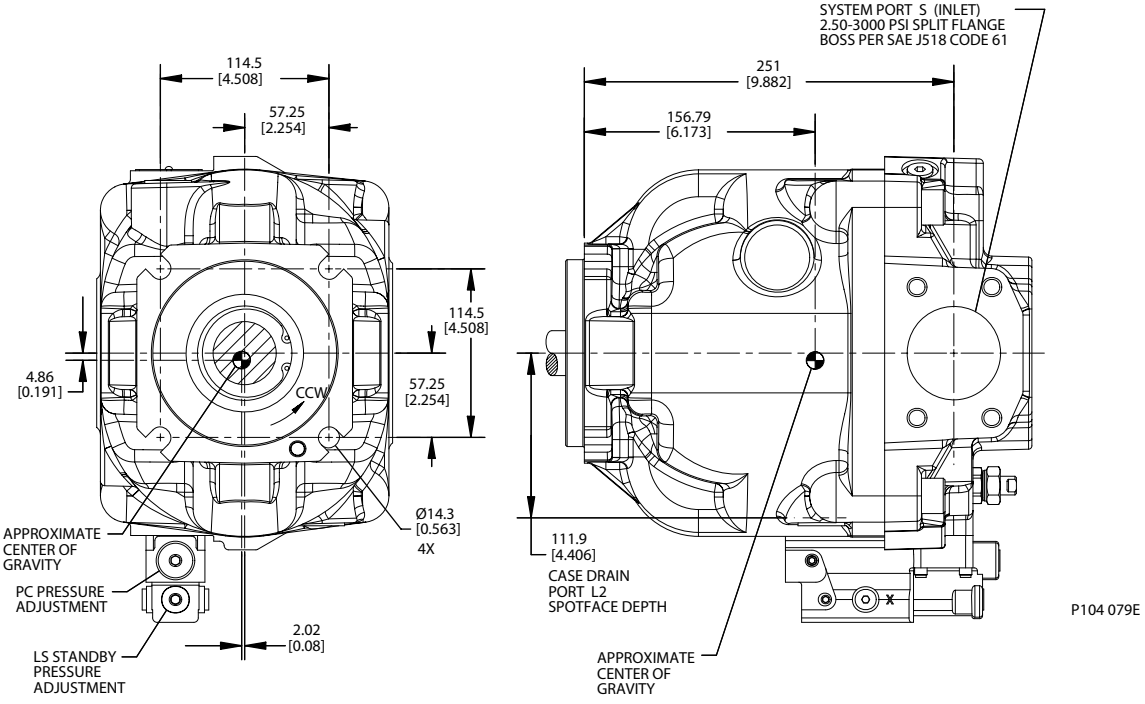

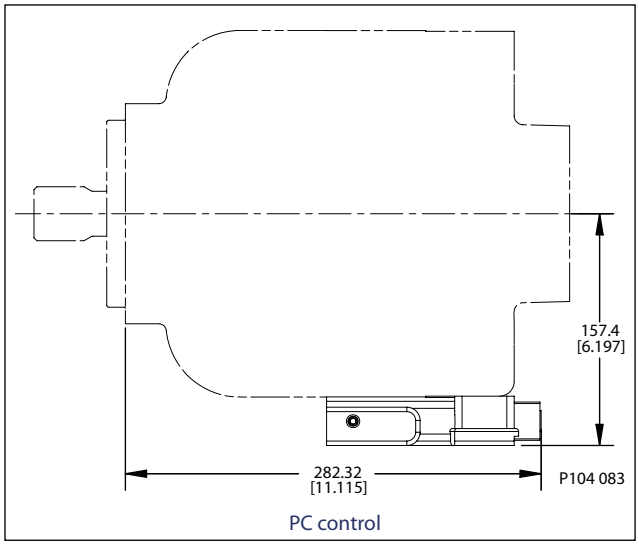

PC control

Third-angle projection mm [in]

Back

SAUER DANFOSS

HYNESUR
SUMINISTROS DE HIDRÁULICA Y NEUMÁTICA DEL SUR, S.L.
Pol. Ind. Los Palillos, Calle 6 Nave 31
41500 Alcalá de Guadaira
SEVILLA
Tel. 954 047 523 Fax. 955 631 705
hynesur@hynesur.com

OUR PRODUCTS

Hydrostatic transmissions

Hydraulic power steering

Electric power steering

Electrohydraulic power steering

Closed and open circuit axial piston pumps and motors

Gear pumps and motors

Bent axis motors

Orbital motors

Transit mixer drives

Planetary compact gears

Proportional valves

Directional spool valves

Cartridge valves

Hydraulic integrated circuits

Hydrostatic transaxles

Integrated systems

Fan drive systems

Electrohydraulics

Microcontrollers and software

Electric motors and inverters

Joysticks and control handles

Displays

Sensors

Sauer-Danfoss Mobile Power and Control Systems – Market Leaders Worldwide

Sauer-Danfoss is a comprehensive supplier providing complete systems to the global mobile market.

Sauer-Danfoss serves markets such as agriculture, construction, road building, material handling, municipal, forestry, turf care, and many others.

We offer our customers optimum solutions for their needs and develop new products and systems in close cooperation and partnership with them.

Sauer-Danfoss specializes in integrating a full range of system components to provide vehicle designers with the most advanced total system design.

Sauer-Danfoss provides comprehensive worldwide service for its products through an extensive network of Authorized Service Centers strategically located in all parts of the world.

Sauer-Danfoss (US) Company
2800 East 13th Street
Ames, IA 50010, USA
Phone: +1 515 239-6000, Fax: +1 515 239 6618

Sauer-Danfoss (Neumünster) GmbH & Co. OHG
Postfach 2460, D-24531 Neumünster
Krokamp 35, D-24539 Neumünster, Germany
Phone: +49 4321 871-0, Fax: +49 4321 871 122

Sauer-Danfoss (Nordborg) A/S
DK-6430 Nordborg, Denmark
Phone: +45 7488 4444, Fax: +45 7488 4400

www.sauer-danfoss.com

BLN-10128 • **520L0519** • Rev C • Apr 2003
Heuss Printing / 0403